

STORMWATER
MANAGEMENT
PROGRAM

**2024 ANNUAL
DISCHARGE
MONITORING
REPORT**



PREPARED BY
Peggy Amsbaugh
Engineer Tech. III

Introduction and Description

The 2024 Discharge Monitoring Report is given in a format in conjunction with the NDR04-0000 permit. Presented sequentially to follow the permit elements, the report begins with general requirements and progresses through the six Minimum Control Measures. Highlighted or example documentation is provided at the end of each section as appropriate. A growing number of resources are digital or linked to AutoCAD/GIS, which is available for audit upon request.

The **Fargo MS4 Compliance Summary** is a matrix of Part V of the NDR04. This table illustrates compliance responses spanning each control measure and the MS4 Program overall in abridged exhibits. Please see each separate measure for topic specific criteria responses.

Evaluation and Assessment

Evaluation, assessment and effectiveness of goals, projects and BMPs is conducted annually. Fargo's MS4 Program meets compliance goals set locally and by the state NDR04 permit requirements. Results of these measures and recommended changes are consolidated on a summary sheet (MS4 Compliance Summary) at the end of this section.

MS4 Program Map

Fargo perpetually maintains a state-of-the-art geographic information system (GIS) and AutoCAD mapping program of the complete infrastructure system (permit items IV.E.a-f). These platforms calculate all property areas and components of the municipal systems. This map is available for viewing at the office but is unavailable for outside access due to security concerns.

MS4 Operated Facilities

Fargo Wastewater and Solid Waste entities operate under separate stormwater permits. Please contact each department for their specific permit requirements.


Pollution Assessment (Identified Pollutants)

Fargo has identified pollutants and specifically lists them in the Stormwater Ordinance (Chapter 37 of the City of Fargo Municipal Code). The ordinance lists obvious water degrading agents or practices, but it also states that any action or process that diminishes water quality is a violation. Stopping or reducing negative discharge is the goal of not only the regulation, it is the essence of the entire stormwater program.

Reduction/removal of these pollutants is accomplished by structural (retention, detention ponds, grit chambers, etc.) and non-structural (prescribed discharge rates, compliance practices, etc.) BMPs.

Public Availability

This report is made available to the public online at: [The City of Fargo - Storm Water Management](#)
The MS4 program and related operational documents are available upon request during business hours.

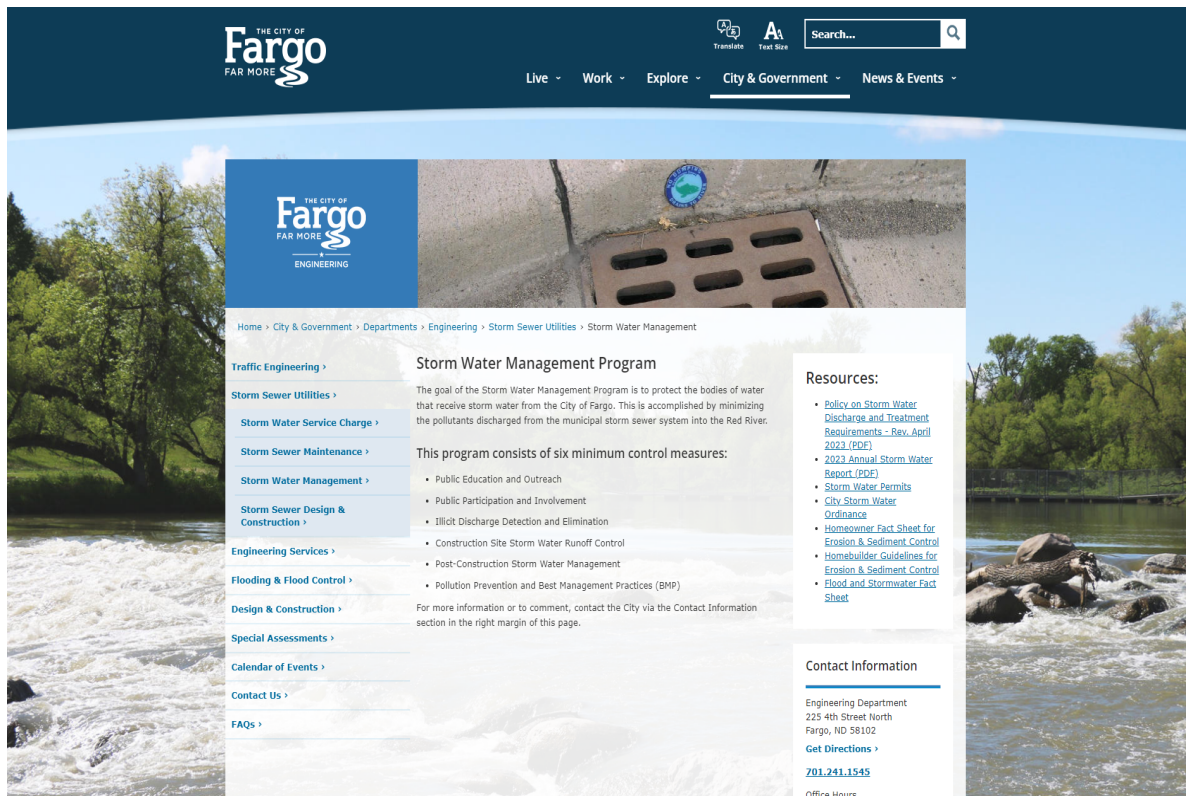

Shared Program Agreements with other MS4s

The City of Fargo and North Dakota State University have an agreement that the city performs construction permitting and inspection on campus. NDSU is responsible for all other reporting elements in the permit.



Table of Contents

Narrative

General Requirements Support Material

Minimum Control Measure 1 (MCM-1)

Minimum Control Measure 2 (MCM-2)


Minimum Control Measure 3 (MCM-3)

Minimum Control Measure 4 (MCM-4)

Minimum Control Measure 5 (MCM-5)

Minimum Control Measure 6 (MCM-6)



									
	(NDR04-V.c.1) Permit Status Compliance: BMP Assessment & Evaluation	(NDR04.V.c.2, 3) Measurable Goals Compliance, Progress, Completed	City of Fargo MS4 Compliance Summary	(NDR04-V.c.5) Future Planned Activities	(NDR04-V.c.6) Changes to BMP or Measurable Goals	(NDR04-V.c.7,8) Responsible Entity (NDR04-V.c.9) Violations Issued	Reviewed		
MS4 Program Overall	Complies, BMPs adequate	All MCM Goals meet compliance and were completed.	Fargo's MS4 Program is effective in addressing & reducing non-compliant discharges.	Additional studies, new reporting capabilities may enhance or expand goals.	No changes are planned for 2025 beyond the studies.	Fargo Storm Sewer Utility	138 (Excludes Environmental Health and Wastewater Treatment Departments)	1-07-25	See individual Minimum control Measures for detailed information and supporting documentation.
MCM-1 & 2	Complies	Completed	Effective	Maintain As-is	No Changes	SSU		1-07-25	Most information in the report is available online www.FargoND.gov/city-government/departments/engineering/storm-sewer-utilitie/stormwatermanagement
MCM-3	Complies	Completed	Effective	Maintain As-is	No Changes	SSU		1-10-25	
MCM-4	Complies	Completed	Effective	Maintain As-is	No Changes	SSU		1-13-25	
MCM-5	Complies	Completed	Effective	Maintain As-is	No Changes	SSU		1-16-25	Please direct any questions/comments to stormwater@FargoND.gov
MCM-6	Complies	Completed.	Effective	Maintain As-is	No Changes	SSU		1-16-25	

MCM 1 & 2

Stormwater Education Program




Involvement

Outreach

Participation



MCM 1&2 Education, Outreach & Involvement

Audience	Pollutant (group)	Goals	Activities	Messages	Implementation/ Schedule	Entity	Performance Measures	Adjustment Method	Reviewed	Modification Recommendations
Construction	A, C, D	Acquired skill/behavior change	Problem-based learning <ul style="list-style-type: none"> On-site evaluation Classroom instruction 	<ul style="list-style-type: none"> Specific construction related Use BMPs to reduce soil & trash migration Contain chemicals/lubricants Reduce other negative impacts 	Annual, continuous during construction season		<ul style="list-style-type: none"> Participation count Permit/violation report Complaint log Staff referral Maintenance record 	<ul style="list-style-type: none"> Yearly program review Direct contact Verbal interaction with partners, other agencies and facilitators 	1/9/2025	Continue to improve annual spring Stormwater Conference
General Public	A, C	Awareness	Inquiry-based learning <ul style="list-style-type: none"> Classroom instruction River Keepers programming Fact sheet/newsletter Demonstrations Billboard 	<ul style="list-style-type: none"> Your actions impact stormwater Reduce water quality degrading practices Report illicit (prohibited) discharges 	Continuous, seasonal		<ul style="list-style-type: none"> Participation count Permit/violation report Complaint log Staff referral Maintenance record 	<ul style="list-style-type: none"> Yearly program review Direct contact Verbal interaction with partners, other agencies and facilitators 	1/15/2025	Continue water quality device & retention ponds log and inspections
Municipal Operations	A, C, D	Acquired Skill	Project-based learning <ul style="list-style-type: none"> Training video Presentation 	<ul style="list-style-type: none"> Municipal operations impact stormwater Water quality degrading observations Report illicit (prohibited) discharges 	Annual rotating basis, some departments may also provide in-house training		<ul style="list-style-type: none"> Participation count Permit/violation report Complaint log Staff referral Maintenance record 	<ul style="list-style-type: none"> Yearly program review Direct contact Verbal interaction with partners, other agencies and facilitators 	1/16/2025	Continue accurate reporting and recording between Public Works Superintendent and SSU staff

Minimum Control Measures 1 & 2

Fargo's Stormwater Education Program

In summary, the MS4 Permit Minimum Control Measures (MCM) 1 & 2 require the city to provide education, outreach, public participation and involvement opportunities. We must specifically address construction and post-construction pollution prevention, illicit discharges and methods to reduce negative discharges, while conducting our municipal operations. Additionally, we must develop a method to quantify our educational effectiveness and provide a method to adjust the programming.



Our education program integrates the requirements prescribed under these MCMs. Collectively, the Fargo Stormwater Education Program uses a “based” learning approach to educate, inform and involve people concerning Stormwater’s impact on water quality. Although water quality is not a new concept today, polluting agents and practices might not be obvious in people’s minds. Our program helps inform the public about water polluting practices and what they can do to reduce or eliminate them. Learning and participation is focused toward target audiences and utilizes a variety of activities, projects, methods and mediums to educate and inform people about stormwater and water quality.

We have specifically designated construction, municipal maintenance operations and the “public” as our target audiences. The targets were selected based on perceived need, impact potential, MS4 requirements and the ability to deliver programming. Learning delivery to these segments is scheduled and consists of direct or implied, activities, projects or techniques. For instance, consider that soil migration is of primary concern at a construction site, yet it also occurs at a flower bed. Where a construction site has specific Best Management Practices (BMPs) that must be utilized, an implied concept of awareness (that soils migrate) may be adequate to the flower bed scenario. Education may be a simple billboard message (Inquiry Based) or specific technical training (Problem Based), depending on the audience or practice.

How we measure the education program’s effectiveness is yet another challenge. Quantification is one method. We simply count people participating in training seminars, providing feedback or the number of projects delivered (fact sheet or other), violations issued, sediment or trash removed, etc. The following pages highlight our program’s architecture, complete with illustration tables, graphics, images and examples of the actual materials utilized in the delivery of the program. The final section is focused on program performance measures (evaluation) and adjustment methodology.

Fargo's Storm Sewer Utility Staff

Our staff conducts related environmental education and outreach learning activities along with other City staff, core partners and related entities. The concept of water quality in stormwater discharge is the goal of the education, involvement and participation programming.

Facilitators

- The City of Fargo Storm Sewer Utility (SSU) is responsible for the Stormwater Program's administration.
- Contributors include City departments: Environmental Health, Solid Waste, Public Works and Wastewater Treatment.
- Fargo River Keepers is a core partner promoting stormwater/ecology education to the general public. Classroom instruction, lab activities and public involvement/participation projects comprise their basic curriculum.
- Other entities delivering similar educational programming include: Red River Basin Commission, local watershed districts, Cass County Soil Conservation, BIA of the Red River Valley and NASECA North Dakota.



Example of contribution by other facilitators

The City of Fargo recycling coordinator delivers programming themed toward the concept that recycling reduces environmental impact and promotes water quality.

Recycling Education



Pollutants and Best Management Practices

Fargo has identified pollutants and specifically lists them in Chapter 37 (Stormwater Ordinance). The ordinance lists obvious water degrading agents or practices but, it also implies that any action or process that diminishes water quality is a violation. Stopping or reducing negative discharge is the goal of not only the regulation, it is the essence of the entire stormwater program.

Knowing or identifying a pollutant is the first important aspect of our stormwater program. The second most important item is simply stopping or reducing the effect of the pollutant before it reaches a storm sewer inlet and eventually the river. This stopping or reducing (whatever it might be) is called a Best Management Practice or BMP. It could be a mat or fiber roll between the street and a stripped construction site or stopping watering before any sediment/dirt from a flowerbed is carried into the street gutter.

Activities and Methods Used to Deliver our Program

Mass Marketing




Digital Media



- Website www.FargoND.gov (Far More On Demand)
- Twitter
- Facebook




Far More On Demand

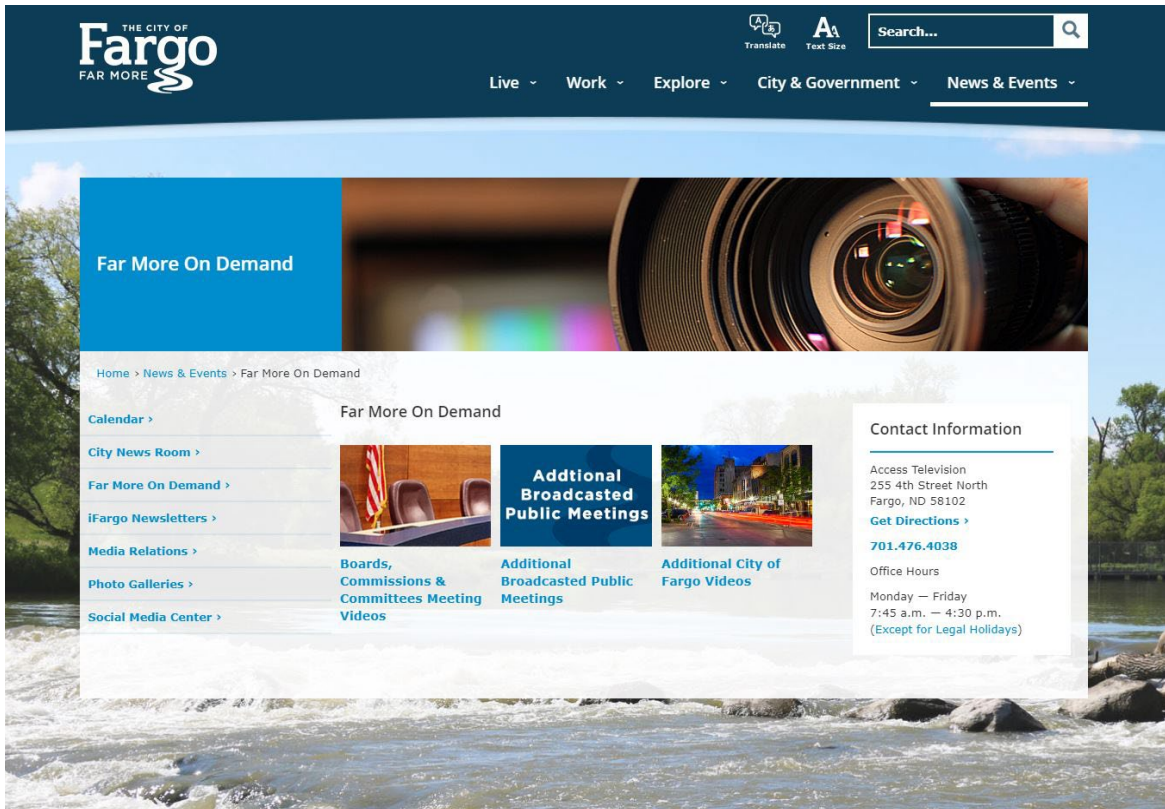

Direct Mail & Factsheets

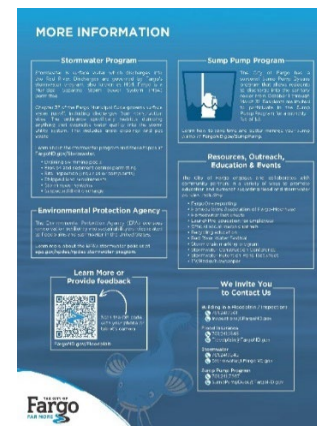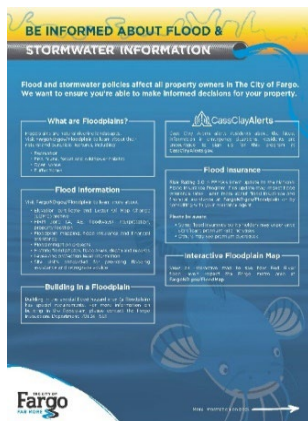

Core Partners

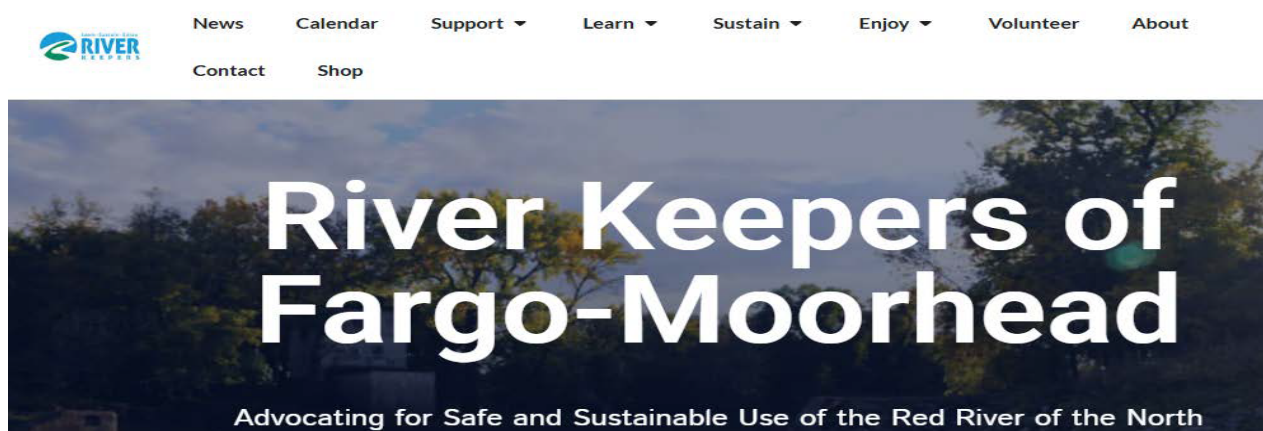

River Keepers delivers water ecology education, and provides volunteer opportunities for the general public. Their mission is to advocate sustainable use of the Red River of the North, primarily within the Fargo-Moorhead area promoting a renewed vision. River Keepers is dedicated to educating our community by increasing local watershed knowledge through active engagement.

River Keepers Activities

Activities include the annual Red River Water Festival, backpack program, geocache, interpretive signs, storm drain marking program and river friendly house and yard management. Fargo SSU staff participates with River Keepers in various activities annually.

The Red River Water Festival sponsored by River Keepers is a very popular annual ecology program for area fourth grade students. This learning event brings students to the river, where they learn and participate in water quality concepts. SSU staff participates with teaching and providing funding.



Committees

- Conservation
- Forestry Advisory

Feedback



Stormwater@FargoND.gov

Community Feedback

The opportunity to provide feedback on stormwater topics is communicated in various activities and projects. Community feedback is managed citywide on a unified basis through a number of portals including office visits, mail, telephone, website, email, Engage Fargo and FargoOne.

Performance Measures

How do we evaluate the effectiveness of our MCM 1 & 2 programming since quantification is so difficult to apply. Some of the methods are listed below, others must be intrinsically interpreted by staff. An increase of incident reports by the public in 2024 is directly related to the increase of awareness of these degrading pollutants.


- Counting (attendance, address mailings, contact log, complaint log, frequency of Learning opportunities, etc.)
- Feedback from electronic reporting portals (email, FargoOne, etc.)
- Inter-department communication (increased - trash, sweeping, pipe cleaning, etc.)
- 2024 awareness incident reports

Program Adjustments


Annually (usually in the first two months of the year), all MCM programming is analyzed. Constructive input from the program's targeted sectors is evaluated by the Fargo Storm Sewer Utility staff. Changes (additions or deletions) are incorporated and carried out.

Current program is deemed adequate and no changes are recommended for 2025. MCM 1 & 2 contributions will be maintained at the existing level.

Public Involvement & Outreach Map - 2024

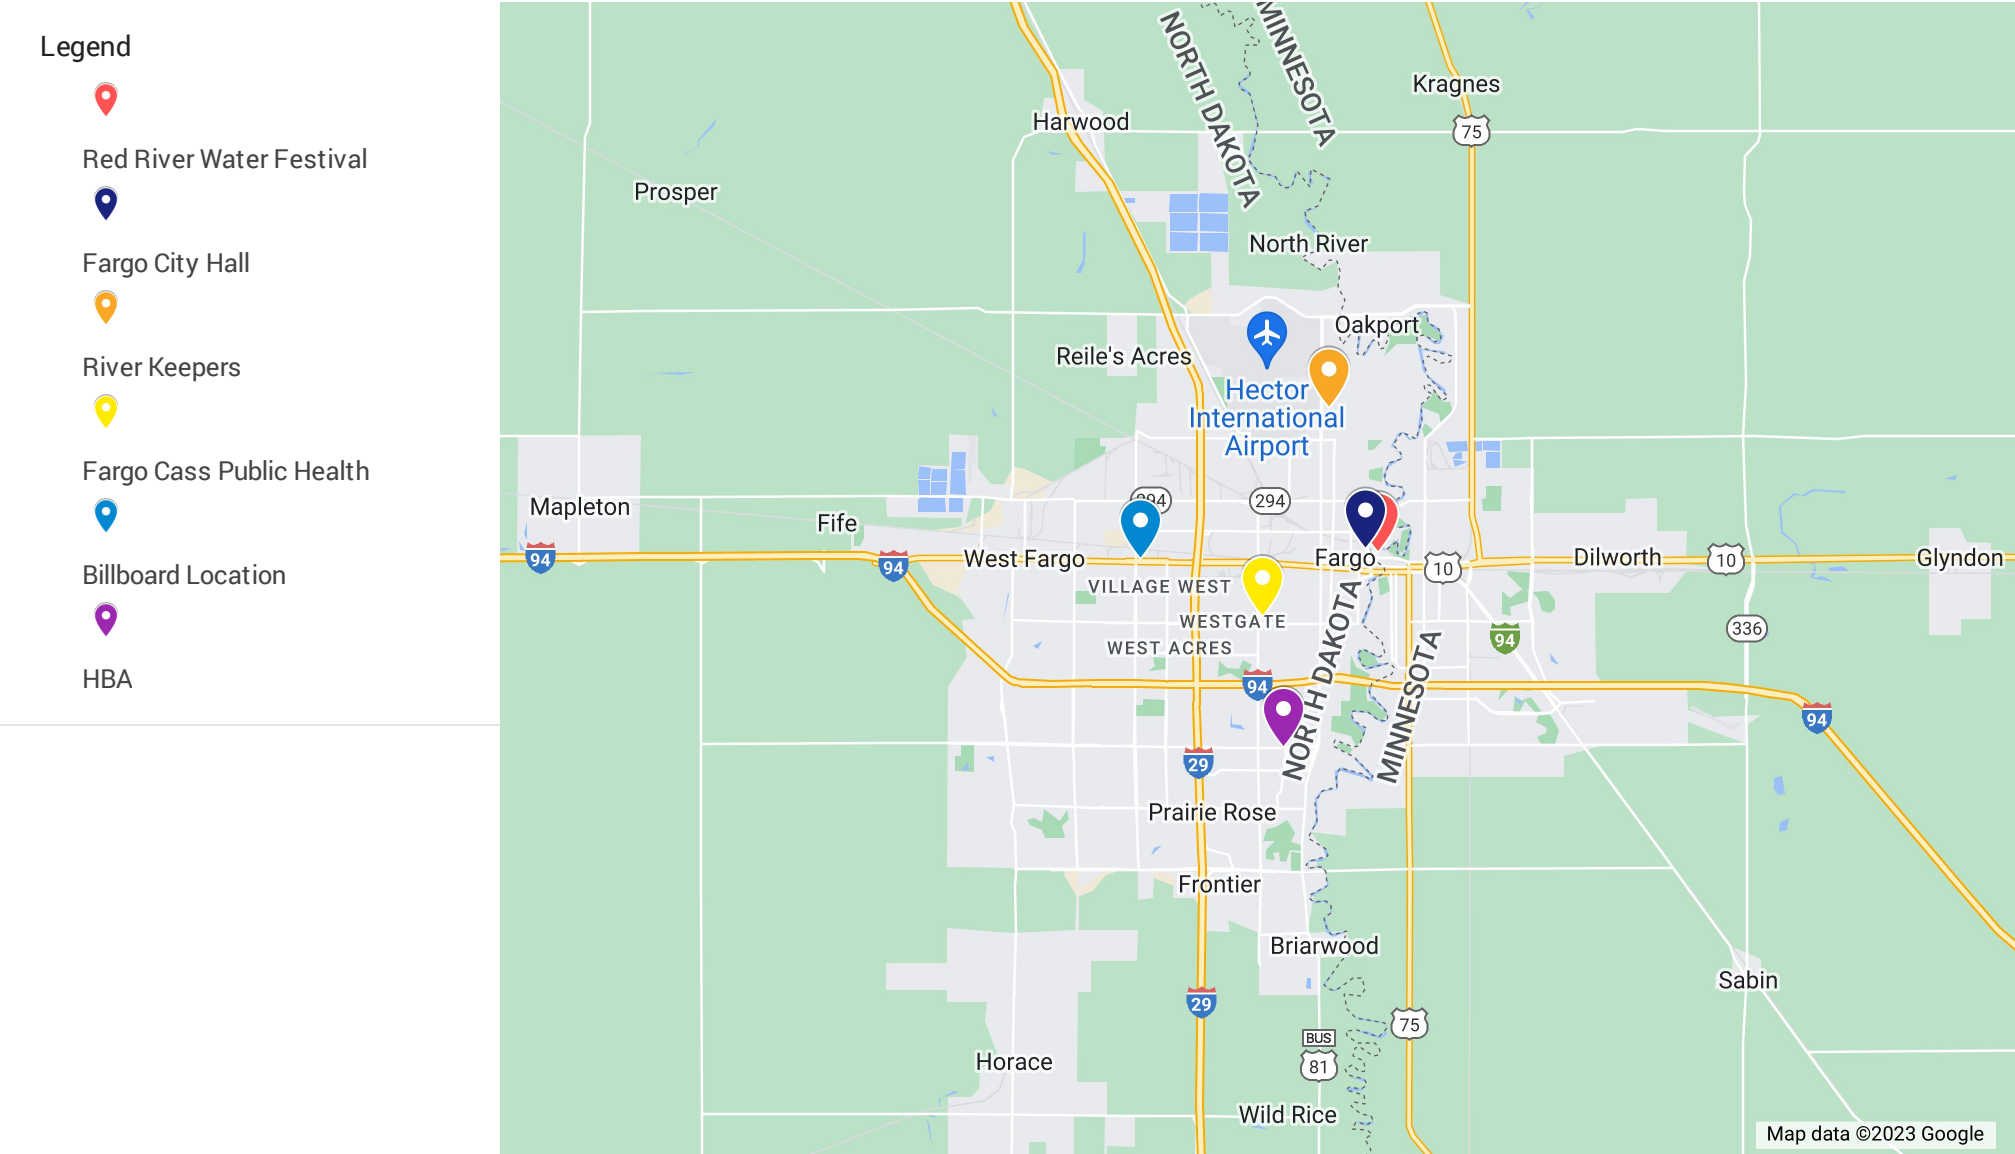

Red River Water Festival Outdoor Map

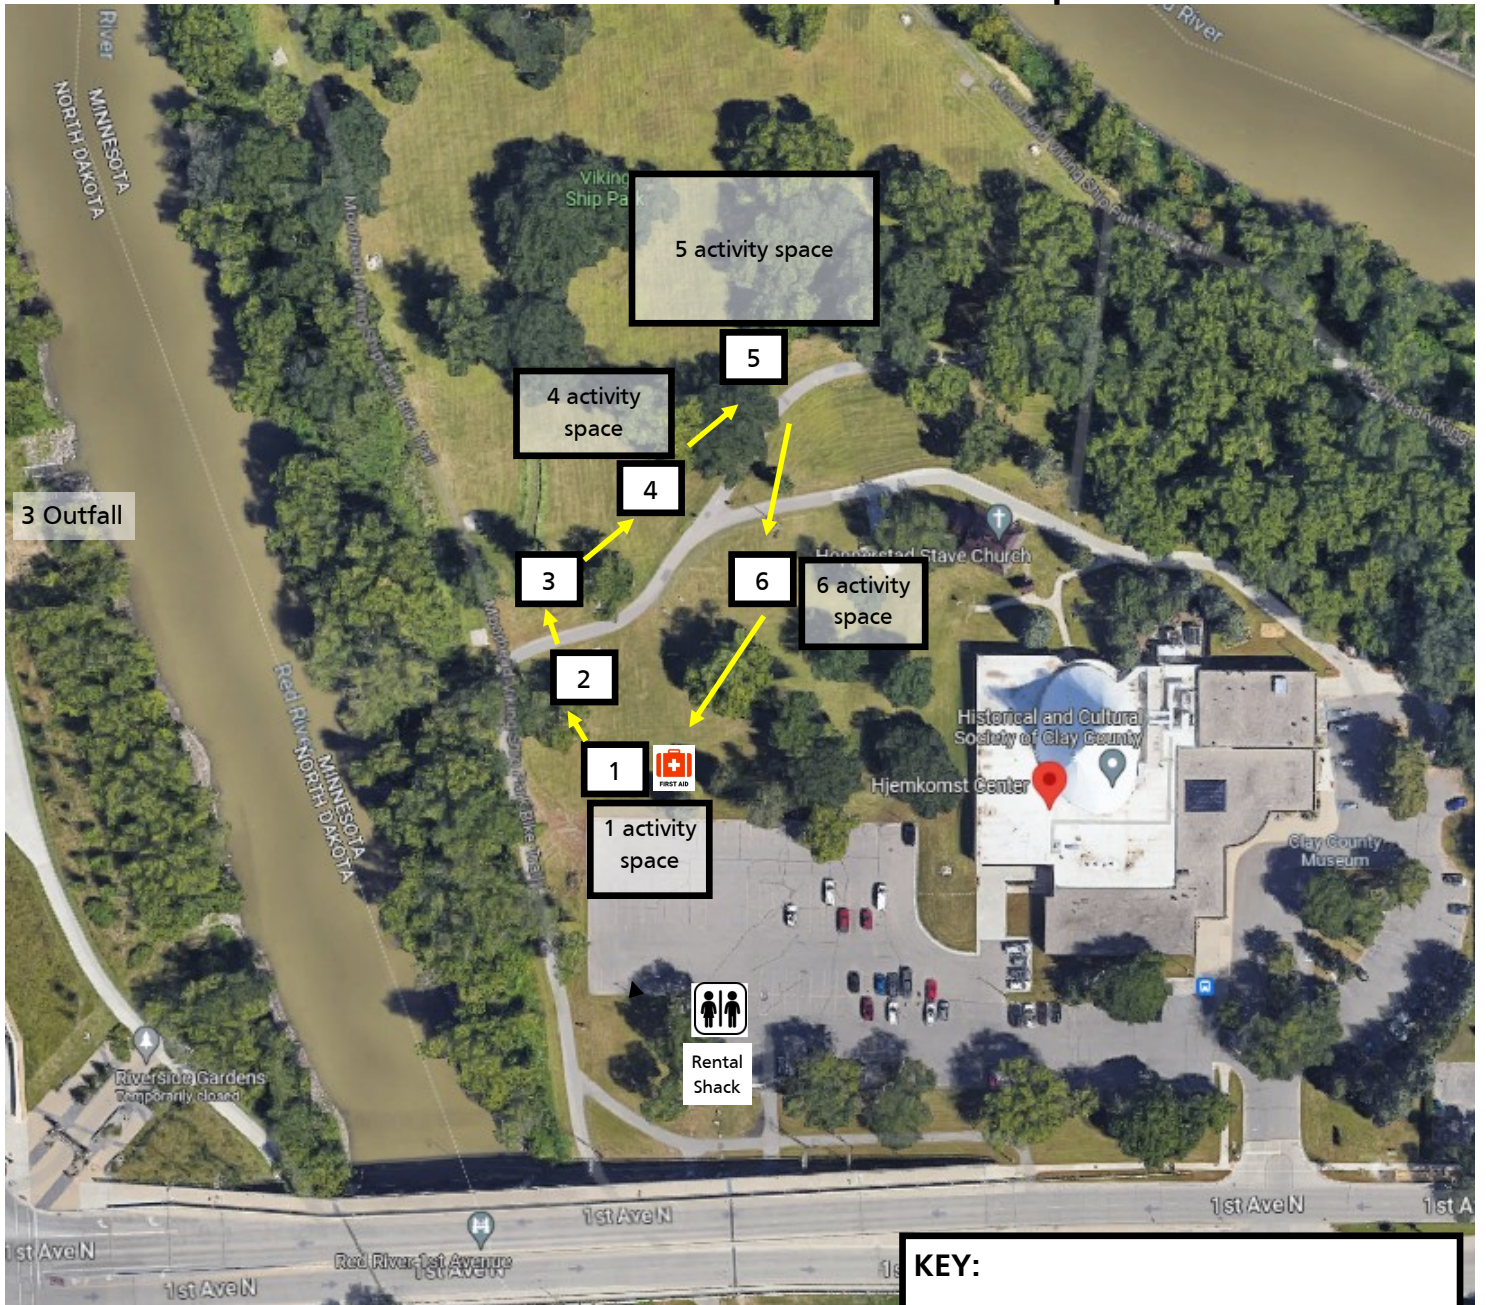

KEY:

1—Blue River

2 —Trees the Water Keepers (position so the canopy does not cause a visibility hazard for bikers)

3 —River Crime Lab

4—Incredible Journey

5— Stream Sense

6—Invaders!

 - Porta potty

WHAT IS A STORM DRAIN?

Storm drains are the grated openings in the street that collect water from rain and melting snow to minimize street flooding.

As stormwater flows along streets, it collects trash, leaves, grass clippings, pet waste, car fuels and other pollutants into storm drains.

Pesticides, paints, antifreeze, and other used motor oil can end up in the storm drains when people dispose of them improperly. This is an illicit discharge and is against city ordinances.



WHAT IS THE PROBLEM?

Have you ever wondered where water goes after it 'disappears' into a storm drain? Stormwater in Fargo-Moorhead is not treated at a wastewater plant, but is discharged directly into the Red River or Sheyenne River through outfall pipes. Runoff carries contaminant and debris picked up along the way, polluting our surface and groundwater, which are often drinking water sources.



WHAT CAN YOU DO?

- Volunteer to mark storm drains to teach others about stormwater
- Prevent pollution by keeping contaminants out of storm drains
- Follow the No Dumping Drains to River message and do your part to help protect our water
- Sign up your volunteer group to mark storm drains by contacting River Keepers



CONTACT US

River Keepers
kimberly@riverkeepers.org
701.356.8915
riverkeepers.org
1120 28th Ave. N., Ste. B
Fargo, ND 58102

ADDITIONAL INFORMATION

riverkeepers.org
FargoND.gov
cityofmoorhead.com
westfargond.gov



STORM DRAIN MARKING PROGRAM

A volunteer program to protect the Red River by linking human actions to pollution problems.



PREPARATION

1. Discuss the storm drain marking program with your youth group, school class, civic organization, family, neighborhood group or friends. It is recommended that participants be at least 10 years old.
2. Select a date for marking. The pavement must be dry and the weather must be above 50 degrees.
3. Choose a time of day and length of time available to do the project. Two hours is the recommended length.
4. Select a neighborhood to mark and a location to meet.
5. Figure out the number of participants.
6. Recruit supervisors. One supervisor is recommended for every 4-8 youth volunteers, depending on the age.
7. Plan an alternative date in case of rain.
8. Contact River Keepers to set up the project, which includes supplies and training.

DAY OF PROJECT

Review the following instructions with participants or scan the QR code to watch a training video (available on our YouTube channel).




Put on safety vests.

Break into groups - two people to mark the curb, two people to distribute door hangers.

CURB MARKING TEAM

1. Decide where to put the marker.
 - Surface must be flat, dry, and make contact with the whole marker. The preferred placement is on top of the curb.



- The second option is on the face of the curb.
- If the curb is not possible, the street right next to the curb and storm drain is the last option.



2. Sweep the area where the marker will be placed so it is free of any loose debris.
3. Peel backing paper off one side of the adhesive disk.
4. Place storm drain marker evenly on top of the adhesive disk.
5. Remove backing paper on other side of the adhesive disk.
6. Apply to cleaned area. It is important that the entire edge of the marker is sealed to the curb or street.
7. Step or place pressure on the storm drain marker to make sure the adhesive sticks.

DOOR HANGER TEAM

- Walk on sidewalks, stay off of the grass.
- Do NOT put door hangers in mailboxes.
- Place door hanger on the door that looks most used. Do NOT open the door.
- Do NOT leave a door hanger if it will blow away.



FOLLOW-UP

- Indicate streets marked on maps provided.
- Document how many volunteers participated and how many hours were volunteered.
- Return maps and extra storm drain marking supplies.
- Congratulate yourselves...you deserve it!

	A	B	C	D	E	F
1	Fargo					
2	Date	Location	# of Volunteers	Total Volunteer Hours	Storm Drains Marked	
3	8/21/2024	Fargo near Valley View Park	6 volunteers	10 volunteer hours	23 storm drains marked	
4	8/28/2024	Fargo near Autumn Fields Park	4 volunteers	4.5 volunteer hours	28 storm drains marked	
5	9/18/2024	Fargo near North River Grassland	8 volunteers	24 volunteer hours	47 storm drains marked	
6	10/4/2024	Fargo near Autumn Fields Park	4 volunteers	4.5 volunteer hours	37 storm drains marked	
7	11/7/2024	Fargo at NDSU near Peltier Complex	1 volunteer	1 volunteer hour	6 storm drains marked	
8	11/10/2024	Fargo at NDSU near Ladd Hall	1 volunteer	1 volunteer hour	3 storm drains marked	
9	11/21/2024	Fargo south of El Zagal	1 volunteer	2.5 volunteer hours	0 storm drains marked	*The volunteer distributed door hangers to the all the houses but did not get around to marking the storm drains
10	12/17/2024	Fargo north of Sanford on Broadway	2 volunteers	12.5 volunteer hours	63 storm drains marked	

City of Fargo Division of Solid Waste

Public Education

2024

January

Recycling Reality Check on KFGO

February

Recycling Reality Check on KFGO

March

Recycling Reality Check on KFGO

April

Recycling Reality Check on KFGO

Earth Day Poster Contest at Jefferson Elementary with presentations to 80 students

May

Clean up Week Interviews – radio and television

Careers on Wheels – 845 students educated

Recycling Reality Check on KFGO

June

Safety Town Presentations to 270 students

Recycling Reality Check on KFGO

July

Safety Stand Down at the Fargo Landfill - Educated drivers and customers of the City of Fargo Landfill on safety procedures and protocol – educated 150 customers

Recycling Reality Check

August

Recycling Reality Check on KFGO

September

Recycling Reality Check on KFGO

October

PEO Presentation – 25 in attendance

Recycling Reality Check on KFGO

Drop site Education – 50 Residents

November

Recycling Reality Check on KFGO

Cans to Cartons Promotion with Minnkota Recycling and Scheels
Arena

December

Recycling Reality Check on KFGO

MCM 3

Municipal Operations





Illicit Discharge Detection and Elimination (IDDE)

Standard Operating Procedure for IDDE

Staff assess the site situation and determines the best course of action. Staff's goal is to respond to a report of an illicit discharge in a timely manner, aid in its termination and enable remediation.

Field staff is trained how to spot an illicit discharge and report it for further investigation.

Site Investigation

Assess the situation –

- Visual inspection of the site.
 - If life or property is at immediate risk call 911
 - If it can be done safely, stop the source of the spill
 - Take pictures/notes: location, size, colors, odors, type of material, etc.
 - Make contact with property owner/manager and direct to mitigate.
 - Contact appropriate department that oversees segment

Contacts

- Fargo Fire Department 911 (non-emergency 241-1540)
- Environmental Health 476-6729
- Street Department 241-1453
- Waste Water Treatment Plant 241-1445

Enforcement

- Issue Notice of Violation or Administrative Order to the violating party
- City also may charge owner for contractor/department site clean -up
- Non-compliance or post mitigation effort may be referred to City Prosecutor

Report Log

Keep a log of illicit discharges, response and mitigation.

Post remediation inspection

Perform site inspection to ensure mediation/mitigation was conducted.

MCM 3 – Illicit Discharge Detection and Elimination (IDDE) Program

Degrading water quality (Illicit Discharge) by dumping substances or bypassing the sanitary system is illegal. The Red and Sheyenne Rivers are the source of the City's water supply, so protection of our drinking water is a critical mission. In response to that charge, the City has created a detection and elimination program commonly known in the stormwater world as the IDDE Program.

Fargo's IDDE Program uses the same design as many other MS4 entities. Public education/involvement/awareness along with training municipal staff are key components of the program. Specifically, the IDDE Program's focus is on the discovery, containment and elimination (mitigation) of water degrading practices. There are a number of rules and procedures available in the city to address non-conforming discharges.

In addition to State and Federal regulation, the Stormwater Ordinance defines non-conforming and allowable discharge that can enter our storm sewer utility. Construction and land disturbing activities are addressed as well. Dumping any adverse substance in any form is a violation. Fargo's Stormwater Management Program under supervision of the Fargo City Engineer administers enforcement along with the full support of other city departments.

IDDE Spill Response



Illegal discharge reports

Illegal discharge reports communicated by other staff or the public follow the standard operating procedure format. Administration is by the department responsible for a particular operational

segment. For example, reports involving a restaurant dumping grease into the sewer or on the ground is referred to Fargo Cass Public Health – food inspection division. Suspect illegal non-functioning storm sewer connection or infiltration routes to public works for remedy or testing. All hazardous material exposure incidents are directed to the Fargo Fire Department’s HAZMAT Team. Each of these departments would take the lead command of operations and the Storm Sewer Utility Department reverts to a support role.

Illicit Discharge & Elimination Map – 2024

- 12 Ave N
- 1444 39 St N
- 3225 12 Ave N
- 7 Ave N/45 St N
- 7 Ave N/36 St N
- 25 St S/69 Ave S



Routine Municipal Operations

Non-conforming material is an everyday maintenance issue for Fargo’s Public Works (FPW) operations group. Operational staff is the field staff, defined by job description directed toward maintenance tasks of the city. Department staff vary from garbage pickup to snowplow route operators who are out patrolling the city constantly. All staff are trained to report operational inconsistencies including illicit discharge due to spill or other circumstance.

Education, outreach and involvement

Education and outreach on this topic is conducted in concert with MCM 1 & 2. In all contact situations the perpetrator is appropriately educated concerning mitigation resolution along with any penalties assessed. Factsheets or violations are also used to educate the public and business operations on illegal dumping and other storm water conflict situations. Directed informational topic pieces like a fact sheet or letter is customarily sent to a geographic or similar group of people if a primary perpetrator cannot be identified. City staff is also trained for IDDE specific exposure in conjunction with MCM 6 (municipal maintenance operations).



Fargo IDDE Program Components


- Chapter 37 (Stormwater Ordinance available online www.FargoND.gov/auditors)
- Illicit discharge detection & elimination standard operating procedure
- Illicit discharge detection & elimination Work Order
- Educational Support Material
- Notice of Violation
- Drainage Complaint Log

Quantification, Appropriateness and Program Recommendations

There are multiple incidents of illicit discharges reported annually to various departments. Each department mounted a suitable response and if appropriate performed necessary mitigation action to reduce future replication. Documentation of such incidents is perpetually maintained in department records. This system is highly functional, with no operational changes recommended.

Illicit Discharge Detection and Elimination (IDDE)

Standard Operating Procedure
(NDR04, Part IV.F.3b)
Typical procedures but others may apply.

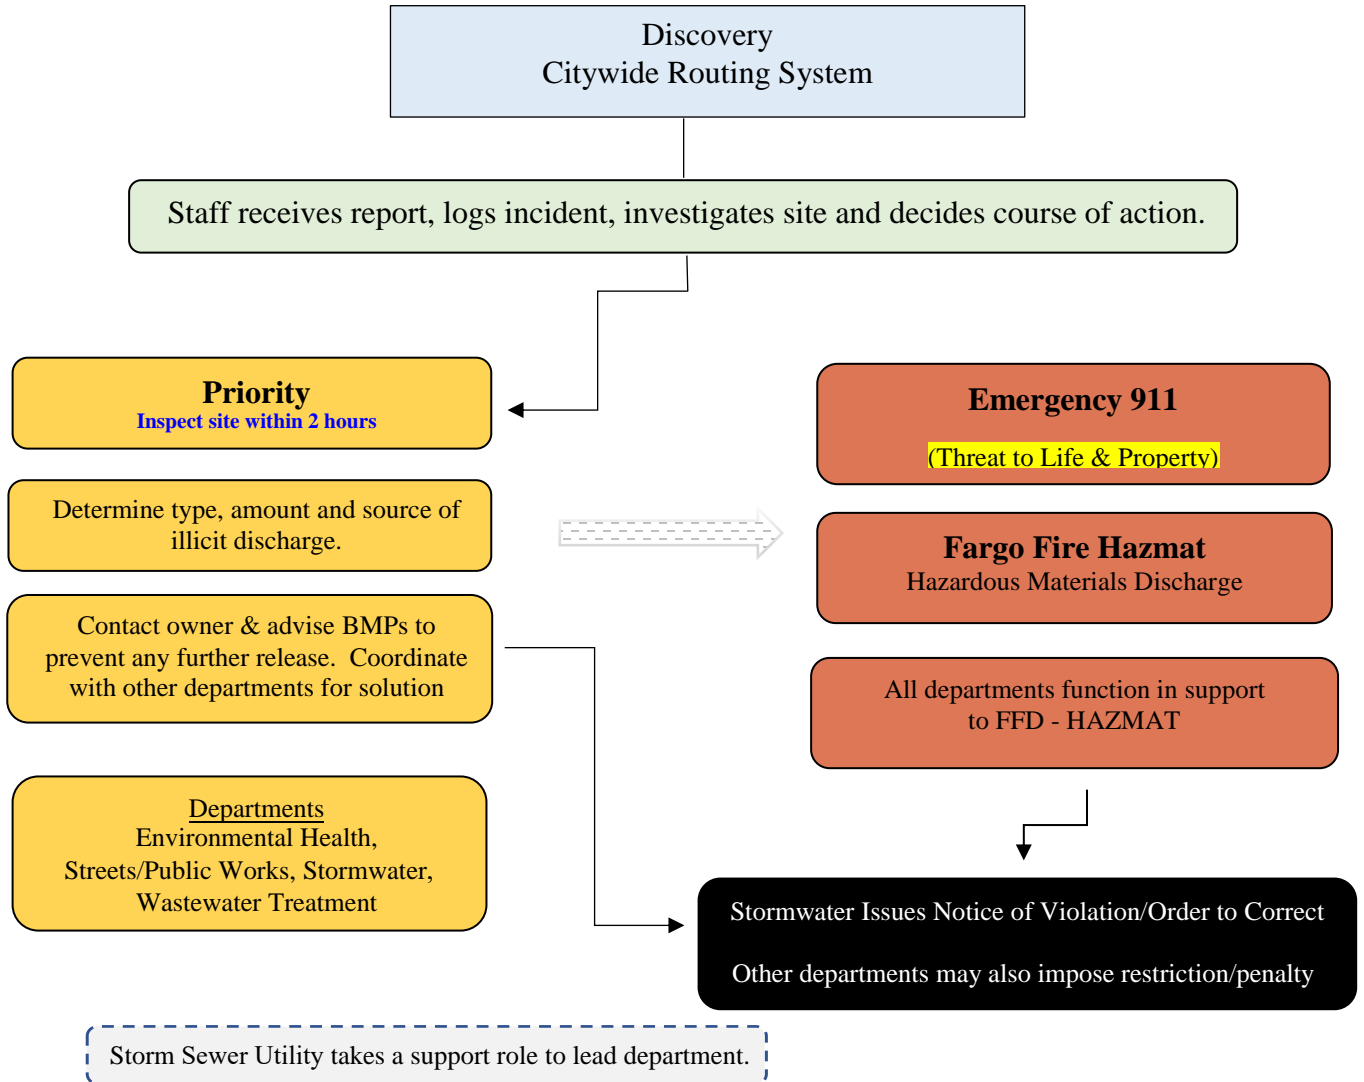

Site re-inspection conducted post response.

- If no or insufficient mitigation is accomplished, administrative order to correct is issued.
- Municipal Court

MS4 Underground Tank Storage Policy

General Description

The classification, Underground Storage Tank (UST), also UST Systems is divided into two categories Regulated and Unregulated. USTs are normally associated with fueling (gas) stations, petroleum distributors or commercial/industrial operations and some residential sites. Locally the City of Fargo has three departments affiliated with USTs, fire, health and storm sewer. See description of departmental interaction below.

Regulated USTs are controlled by the State of North Dakota's Environmental Quality Division under their UST Program. NDCC Chapter 33-24-08 Technical standards and corrective actions requirements for owners and operators of underground storage tanks.

Unregulated UST remain under local observation with FFD having permit and location mapping authority, FCPH-EH assists in tank removal operations and health risk discoveries. The Storm Sewer Utility functions in a support role whenever a potential for release into the storm utility system.

Fargo Fire Department

- Permits installation, piping & inspects sites.
- Maintains UST database (location map)

Fargo Cass Public Health's Environmental Division

- Removal of buried tanks
- Records & forwards UST health risks to ND

Storm Sewer Utility (MS4)

- Cross-contamination into STS (with FFD, EH & PW)
- Discharge/Spills into STS
- Works in support of FFD & EH
- Most instances of release trigger the Illicit Discharge Detection and Elimination Program (IDDE) protocol (HazMat)

Notice of Stormwater Violation

Owner/Operator

Construction Site Address

Contact Fax #

Date/Time

The Owner/Operator of this site shall correct the site's deficiencies listed below within **48 HOURS FROM DATE POSTED**

Permit #

A re-inspection for site compliance will occur 48 hours after violation issuance¹.

CONFIRM RECEIPT IMMEDIATELY AT: stormwater@FargoND.gov or FAX: 701.241.8101

Site Deficiency Violations

Corrective Action Required:

BMP's Not Placed or Maintained

Grass Buffer Strip Compromised

Illegal Temporary Entrance

Illegal Discharge²

Inlet Protection

No ESC Permit

Street Tracking³

Other:

Additional Enforcement Action

1. If non-conforming conditions exist upon re-inspection, the owner, operator, or permit holder shall be subject to a re-inspection fee of \$60/hr (\$30 minimum). **Failure to correct may also result in prosecution under the Fargo Municipal Code (with penalty not to exceed \$500.00).**
2. A live, illegal discharge is grounds for the immediate issuance of a **Stop Work Order**.
3. Tracking onto City streets can, at any time, result in a citation and **Summons to Appear** under Section 11-0901 of the Fargo Municipal Code.

Re-Inspection Fee

Date & Fee

Date & Fee

Date Referred to City Attorney

Date Referred to State of ND

TOTAL

Owner/Operator: Sign & FAX to 701.241.8101

Issued By:

2024 Drainage Concern Field

Number	Date	Name	Address	Concern	Action
0	9/28/23	Lunde Auto	140 40 St S	oil from wash bay showing up in Storm Sewer	Insp helping with plumbing revisions to remove connection to st system
1	1/25/24	Lori Dauner	2794 Golden Valley Pkwy S	rear yard drainage	Developed new drainage plan and staked for homeowner. Met and ok.
2	3/13/24	Kammy Larson	3786 49 St S	side yard drainage	Homeowner hired Valley Landscaping. Will drain east and south diagonally across back yard rather than Roger recommendation north line east then north to inlet
3	3/13/24	Craig Palmer	2853 Lilac Ln North	kids building camp area on private land along river	Notified property owner by letter and took pictures
4	3/20/24	James Moe	3725 Merrifield Dr S	neighborhood rear yard drainage	Based upon current topo. Survey should mark rear yard grades as per original design
5	4/19/24	New Life Center	5556 51 Ave S	settlement around private storm manhole	Westlund Excavating orig installer installed grout on inside of private storm manhole on top of public storm sewer manhole & repair, topsoil and seed around manhole. 4-19-24
6	4/19/24	Tom Fetch	3231 Longfellow Rd N	rear yard drainage along with neighbor to south.	Surveyors got elevations. I analyzed and marked stakes 4-26-2024.
7	4/30/24	Brian Davis	2618 74 Ave S	rear yard drainage	Homeowner has contractor but neighbor not happy with results/swale constr
8	5/3/24	City of Fargo	Kirsten Ln & Ruth Dr	Settlement hole	Peggy talked to Horizon Homes Austin Peterson to handle
9	5/3/24	City of Fargo	52nd Ave East of Univ	ponding in street	PW video, pipe ok, public works filled hole
10	5/22/24	Pat Stoderl	2846 Dakota Park Cir S	rear yard drainage	Jason Leonard assigned to look into. Inlet needs to be lowered & repair conc
11	5/20/24	Kelly Chesley	5565 27 St S	rear yard drainage	Mark survey lath cut/fill data in file
12	5/28/24	Audrey O'Keefe	5548 60 St S	rear yard drainage	design had water going to front yard/street. Topo in file. Threatening calls stopped in June.
13	5/29/24	Paula Harris	4461 49 St S	rear yard drainage	Did not return survey permission
14	5/29/24	Pat Struchynski/COF	2808 33 St S	City Lot Drainage behind her house	Did not return survey permission
15	5/28/24	Ryan Zezulka	7490 Claire Dr S	rear yard drainage	Kevin Gorder aware of problem area west of Bluemont lakes City owned lots don't drain
16	5/23/24	Jim Zitzow	4810 & 4818 Univ Dr S	driveway drainage	Mark survey lath cut/fill data in file
17	5/31/24	Jonathan Anderson	6188 Silverleaf Dr S	rear yard inlet settlement and sump pipes	built concrete driveway over ditch w/o culverts, looked at last year, soln is to remove concrete or urbanize
18	5/31/24	Casey Bloom	5310 Grayland Dr S	Grayland pond maintenance	Site 13 UR-24-A1 to repair
19	6/3/24	Brent Wacha got call	7482 16 St S	rear yard drainage	Letter sent to move sump to disch front. Monitor pond slope
20	6/3/24	Pam Benson	3235 30 Ave S	rear yard drainage	sent letter to neighbors for permission, no further action
21	6/4/24	Barb Bernhardt	2816 38 Ave S	rear yard drainage	Mark survey lath cut/fill data in file
22	6/4/24	Monte Herrmann	3003 25 Ave S	rear yard drainage	Mark survey lath cut/fill data in file
23	6/4/24	Matt Rautenberg	7271 Eagle Pointe Dr S	drainage for new build	Answered email, no action needed
24	6/4/24	Myrna Peterson	115 14 St S	rear yard drainage, older house	surveyed & set stakes for rear yard and neighbor with inlet to north (Leonard)
25	6/5/24	Steve Pederson	1920 19 St S	rear yard drainage	only solution is to pump
26	6/5/24	Hayden Hermanson	1106 16 Ave S	rear yard drainage	met and no permission has been received
27	6/6/24	Patricia Solbakken	1830 14 1/2 St S	rear yard drainage	only solution is to pump sent detail
28	6/6/24	Rob Mynheir	2914 33 St S	rear yard drainage blocked by neighbor	only solution is to run storm line to back yard or pump
29	6/7/24	Amelia Kaskie	4769 52 St S	rear yard drainage	common with 20. Letter to mayor. He was asked to divert sump lines to street and refused. No easy solution between 2 unhappy neighbors
30	6/6/24	Jeff Westberg	3024 23 Ave S	rear yard drainage	met 6/10 gave permission slips to circulate, nothing received as yet
31	6/10/24	Kurt Slotten	1925 19 St S	rear yard drainage	answered call but no action requested
32	6/3/24	Chris Williams	6230 Cattail Cove S	rear yard drainage	answered call but no action requested
33	6/11/24	John Arens	3453 26 Ave S	rear yard drainage	Mark survey lath cut/fill data in file
34	6/11/24	COF/SE Cass	Drain 10/12 Ave N	storm pipe from trailer court joint separation	Mark survey lath cut/fill data in file

Number	Date	Name	Address	Concern	Action
35	6/13/24	COF/SE Cass	5622 53 Ave S & east	Drain 27 encroachments	levee encroachments Precision Landscaping equip. Kevin Gorder handling
36	6/13/24	Robert Leslie	5865 31 St S	Old flood borrow pit	reviewed excavation with Braun approx \$7,000 estimate for CDF bill to follow
37	6/7/24	COF	Drain 40 & 5th Ave S	Settlement over drain culvert	UR-24-A1 Site 15
38	6/18/24	COF Joe Port	1214 38 St N	Settlement hole in pavement over storm sewer pipe	Need to estimate & add to UR-24-A1, have video, do estimate
39	6/18/24	Justin Kerr	7242 16 St S	rear yard grades	common with 2024-23 has been staked
40	6/11/24	COF/SE Cass	5636-5624 58 St S	damage to Dr 27 levee R-O-W	Sent Letters needs follow up
41	7/2/24	Angie Diggins	4252 Pine Pkwy S	Sump pit overflow	Sump pipe overflow. Needs larger pumps or add pump. Neighbors yard ponding against interim levee. Sumps and drainage should go to street. Not happy but no further action warranted
42	7/8/24	Michelle O'Day	128 N Woodcrest Dr N	route for fence and conflict with levee	see file, provided fence detail on retaining wall example/follow up with OK
43	7/8/24	Sarah Anderson	3712 Taylor St S	rear yard drainage	hidden dog fence over levee
44	7/8/24	Cable peds cave in	4995 51 St S	cave in around pedestals over storm sewer	sent permission slip, have to remove neighbors fence as part of soln
45	6/25/24	Regional pond by jail	402 28 St S	pipe and concrete slope settlement	video shows damage to top of pipe. Anthony & Kevin handling repair by private utility
46	7/9/24	Fatough Fovad	3590 Harrison St S	curb drainage	need to estimate and add to UR-24-A
47	6/24/24	Tara Analetto	3237 Longfellow Rd N	Rear yard drainage	I met with him last year and surveyed and told him it was not warranted for an emergency repair and it would be handled in the future as part of normal street recon
					Tied to neighbors to the south that don't want to deepen channel thru their yard
					Action needed
					Resolved
					Storm sewer utility repairs
					Survey should mark cut/fill on stakes

MCM 4

Municipal Operations



MCM 4 – Construction Site Program

The construction program's goal is to reduce pollutant discharge due to construction/development activity. Our program is administered principally by the Fargo Storm Sewer Utility Department (SSU) under the authority of the Fargo City Engineer and the Stormwater Ordinance. The Engineering Department contributes significantly to the program with site plan review for both public and private commercial development and has overall responsibility for public sector construction.

Below is a description of the program's basic functions and methods of operation. Located at the end of this section are support documentation examples, evaluation and future consideration.

ESC Permitting System

All new building sites and land disturbing activities that have a potential to discharge sediment off a site are automatically issued an **Erosion and Sediment Control Permit** (ESC Permit) (37.0301). This process now begins at the inspections department when applying for a building permit. The purpose of the permit is to provide site identification, point of contact information and a formal record. The official "tracking" system (LAMA) is maintained daily by SSU staff. This system has archive capability with a search-by address/document number function; it covers both commercial and residential construction sites.

ESC Permit

Commercial permitted sites must also undergo the engineering department's site plan review process which contains a stormwater review element.



Builders of one and two unit residential buildings are permitted but subscribe to the department's [Stormwater Guide](#) versus site plan submittal for commercial sites (37.0102). These construction sites are patrolled on a regular basis as determined by the stormwater inspector for site conforming conditions. Discrepancy observation can be resolved with personnel on site or through the notice of violation procedure. (See patrol & enforcement)

Site plan review (submittal) “One and two unit residential buildings are exempt”

A construction site plan is required for development under Chapter 37. The ESC Permit application requires operators of commercial sites to submit a site plan (SWPPP) with all related BMPs and water quality & retention addressed including type and location on the site. The site plan review requirement is part of the Land Development Code (LDC) and includes identification of permanent stormwater BMPs. Engineering evaluates all infrastructure connections and conflicting site conditions. Non-conforming scenarios are notated and the plans must be returned for correction. This site plan review ensures compliance with the LDC, stormwater requirements of the North Dakota Department of Environmental Quality NDPDES construction permit (NDR11-0000), MS4 discharge permits and the City of Fargo Stormwater Ordinance.

Additionally, SSU staff reviews plan sheets prior to issuance of an ESC Permit. This review concentrates on the plan’s **temporary physical placement** of BMPs including:

- **Conforming inlet protection**
- **Dewatering**
- **Perimeter control**
- **Stockpile locations**
- **Tracking management (egress/ingress)**
- **Unique BMP proposals**
- **Concrete and similar washout treatments (grindings and mortar)**

Commercial Compliance Inspection

Commercial sites undergo a SSU staff evaluation (on a percentage or complaint basis) once construction gets underway. Here the inspector compares the plan with the site condition and converses with the superintendent about any particular nuances associated with the site. The discussion also elaborates the need to document BMP site changes on the SWPPP.

Patrol and Enforcement

SSU staff uses the permit system for permit verification, developing compliance patrol routes and overall enforcement composition. Construction sites, patrolled on a rotating daily basis may be addressed via personal interaction with a site operator, phone call or issuance of a Notice of Violation (NOV)/Order to Correct. Infractions have a 48-hour correction period with the exception of a live discharge, which requires immediate response. Each site must conform to the criteria of the Stormwater Ordinance for construction site **condition/pollutants**: (refer to the statistical section of this MCM for annual and historical data).

- **BMPs**
- **ESC Permit**
- **Entrance**
- **Grass buffer**
- **Inlet protection**
- **Illegal Discharge (Illicit)**
- **Street tracking**
- **Other**

The form is titled "Notice of Stormwater Violation" and is issued by the City of Fargo Engineering Department. It includes fields for the violator's name, address, and phone number. A section titled "CONFIRM RECEIPT IMMEDIATELY BY SIGNATURE OF THE VIOLATOR" is present. Below this, there is a "Site Inspection Statement" section with checkboxes for various violations: Storm Water Polluted or Mismanaged, Storm Buffer Strip Compromised, Illegal Temporary Entrance, Illegal Discharge, Silt Protection, No ESC Permit, Street Tracking, and Other. A large blue rectangular area is provided for the inspector's signature and date. At the bottom, there is a section for "Additional Information" and a "Total" field for the number of violations. The form also includes a footer with the City of Fargo logo and contact information.

Citizen Contact, Complaints and Contributions Log

Public contact is logged at several interface portals including: Fargo One, City Email Accounts, Facebook and Twitter which are each directed to appropriate departments. The digital media has its own historical tracking element and SSU maintains records in the department database. Public input is evaluated and topics of merit are communicated back to the site operator via comment or official infraction notice.

Written Procedures

The SSU department has established written procedures for site inspections, issuance of Notice of Violation (enforcement), site plan review and response to public input. Please refer to the supporting documentation at the end of this segment.

Stabilization Requirements

The requirement for construction stabilization is established by definition in the Stormwater Ordinance. Examples of the stabilization requirement are cited below. Please refer to the actual ordinance for more information.

- **"Temporary protection"** means short-term methods employed to prevent erosion. Examples of such protection are straw, mulch, erosion control blankets, wood chips, and erosion netting. 37.10203.50
- **"Stabilize"** means the exposed ground surface has been covered by appropriate materials such as mulch, staked sod, riprap, wood fiber blanket, or other material that prevents erosion from occurring. Grass seeding alone is not stabilization. 37.0102.39
- **"Stabilized"** means the exposed ground surface after it has been covered by sod, erosion control blanket, riprap, pavement or other material that prevents erosion. Simply sowing grass seed is not considered stabilization. Ground surfaces may be temporarily or permanently stabilized (also see Final Stabilization).
- **"Erosion control"** means methods employed to prevent erosion. Examples include soil stabilization practices, horizontal slope grading, temporary or permanent cover, and construction phasing.
- **"Sediment control"** means the methods employed to prevent sediment from leaving the development site. Examples of sediment control practices include, but are not limited to silt fences, sediment traps, earth dikes, drainage swales, check dams, sub-surface drains, pipe slope drains, storm drain inlet protection and temporary or permanent sediment basins. 37.0102.37
- **"Final stabilization"** means that disturbing activities at the site have been completed and a uniform perennial vegetative cover with a density of 70 percent of the native cover for unimproved areas and areas not covered by permanent structures, or equivalent permanent stabilization measures (such as the use of riprap, gabions, or geotextiles) have been employed. 37.10203.40

CONSTRUCTION INDUSTRY EDUCATION AND INFORMATION

The City of Fargo Stormwater Program partners with Fargo-Moorhead Homebuilders Association to develop rules, policy guidance and training. The association is comprised of commercial/residential builders, material, service suppliers and related businesses (developers, realtors, etc.) SSU staff regularly contributes to the partnership with newsletter articles, presentations or submissions of new technology.

SSU also communicates directly with contractors via digital [email](#) links. Reminders, requirements and changes are communicated to an ever-changing roster of contractors. Email lists are compiled from the permit contact database to ensure effective information dissemination.

[Fact sheets](#) are used to convey stormwater messaging to ancillary business such as lawn care, delivery firms, etc. The information presented may be specific or broad based, depending on the target audience.

Finally, staff conducts [specialty education presentations](#) upon request. Including preparatory and secondary classroom lectures, PowerPoint presentation and informational outreach.

See all the construction education related programming under MCM 1 & 2.

Cooperating Partners

The program also works via a cooperative agreement with NDSU (another MS4) for their construction erosion and sediment control permitting and enforcement programming. SSU staff verifies necessary permitting and enforces the same stormwater regulations on campus and throughout the entire city. Public Works monitors interface connections and maintenance issues between the two systems.



Statistical Data

A statistical dataset is maintained on the construction program. This report provides annual and previous years' data for trend analysis and program performance. A current copy of the report is included at the end of this segment.

MCM 4 Future Goals

In March of 2022 SSU Staff partnered with the Fargo-Moorhead Homebuilders Association, NASECA, and the North Dakota DEQ providing a conference to educate local homebuilders and contractors on construction site runoff. The goal in 2025, is to continue to attract more interest from the private sector for this as an annual event in an effort to educate local builders and contractors right around the startup of a new construction season.

Fargo's NPDES construction site pollution control program (MCM 4) addresses potential pollution discharging from a construction or disturbed land site and has been in existence since 2006. The program concentrates on discharges due to water runoff, wind or vehicle tracking. Sediment, garbage, washout areas, dewatering, stockpiles and access are controlled. This year's annual report provides feedback on the effectiveness of our control measures.

PERMITS

In 2024 permits decreased slightly. Storm Sewer Utility Staff still conducted routine weekly inspections of construction sites with the number of vehicle track out infractions citywide. Many infractions are also addressed by phone for efficiency. BMPs still remain the largest infraction - see the violations section.

The Lama permitting system was implemented in 2019. The software creates a smooth process of tracking construction activity throughout the city. This system triggers an Erosion & Sediment Control permit at the inspections department during the approval process for a building permit. The system is still evolving as we learn more tips and tools but allows SSU personnel to track and manage our construction site runoff program with ease.

Revenue generated from permit and associated fees remains but a small percentage of the program's total operating cost.

Permits	Issued	\$ Revenue	Violations	\$ Fees	Violations to Permits	Specific Infraction	Inspectors	\$ Total Revenue
2024	259	\$5,180	43	\$0	17%	69	PLA/MR	\$5,180
2023	332	\$6,640	73	\$0	22%	107	KJM/PLA	\$6,640
2022	380	\$7,600	138	\$360	36%	206	KJM/ADZ	\$7,960
2021	385	\$7,700	159	\$120	41%	203	KJM/WJM	\$7,820
2020	403	\$8,060	126	\$120	31%	181	KJM	\$8,180
2019	305	\$6,100	266	\$1,140	87%	337	KJM/SO	\$7,240
2018	389	\$8,894	246	\$1,140	63%	323	KJM/DN	\$10,034
2017	424	\$9,345	263	\$840	62%	313	KJM/BN	\$10,185
2016	510	\$11,717	278	\$540	55%	367	KJM/JCL	\$12,257
2015	496	\$11,282	478	\$2,640	96%	691	JP/TS/KM	\$13,922
2014	434	\$10,162	428	\$3,240	99%	765	Josh P	\$13,402
2013	585	\$13,393	243	\$1,740	42%	455	Josh P	\$15,133
2012	458	\$11,648	307	\$1,740	67%	563	Josh P	\$13,388
2011	395	\$8,936	190	\$572	48%	408	Josh/Mark	\$9,508
2010	362	\$7,917	229	\$390	63%	463	Joe	\$8,307
2009	362	\$7,496	295	\$300	81%	477	Craig	\$7,796
2008	428	\$10,785	304	\$3,240	71%	575	Mike	\$14,025
2007	489	\$11,636	331	\$2,880	68%	1,166	John	\$14,516
2006	367	\$7,460	36	-	10%	36	Steve	\$7,460
2005	0	\$0	0	-	0	0	0	-

Violations

Violations during 2024 remained consistent. Storm Sewer Utility staff is adjusting to working with the Home Builders. Due to the change in staffing commercial site inspections were down slightly for the year. All active permitted sites throughout the construction season will be inspected in the 2025 Season. BMP as an infraction annually tops the list of infractions because it is a more ambiguous (catch-all) term. All infractions not specifically denoted independently are grouped into BMP.

There are several facets to the tracking issue including material delivery, staff (parking & tool off-load), construction equipment, etc. Compounding these elements is the ever shrinking lot sizes which muddles traditional construction practices (maneuverability).

Year	NOVs Issued	BMP	Grass Buffer	Illegal Entrance	Illegal Discharge	Inlet Protection	Permit	Tracking	Total
2024	43	22	3	4	0	2	1	19	51
2023	73	30	2	4	1	18	0	32	87
2022	138	80	2	35	5	19	0	65	206
2021	159	89	2	25	6	10	0	65	197
2020	126	82	6	30	1	4	0	51	181
2019	266	213	10	47	2	17	9	34	337
2018	246	84	4	77	3	35	35	68	323
2017	263	131	32	19	4	20	19	83	313
2016	278	124	6	47	4	23	13	120	367
2015	478	330	2	62	2	27	47	175	691
2014	428	233	2	67	4	74	37	188	765
2013	243	123	24	76	14	22	67	71	455
2012	307	155	14	155	7	34	119	50	563
2011	190	110	11	51	2	32	44	125	408
2010	229	175	18	66	3	35	56	76	463
2009	295	175	16	93	2	43	38	64	477
2008	304	197	8	130	16	34	44	121	575
2007	351	291	152	340	8	38	178	65	1166
2006	36	-	-	-	-	-	-	-	36
2005	-	-	-	-	-	-	-	-	-

Profiling

Contractor	Permits	Violations	Leading Infractions	% Violations To Permit
Jordahl Custom Homes	63	5		7.9%
Thomsen Homes	40	5	BMP maintenance	12.5%
Brookstone Properties	10	1	Street Tracking	10.0%
Klein Construction	6	1	Illegal Entrance	16.7%
Heritage Homes	5	0		0.0%
Titan	5	1		20.0%
Plecity-Kowalski	5	2		40.0%
Krueger Construction	4	0		0.0%
Designer Homes	4	1		25.0%
	142	16		
Top 9 permit holders account for	55% of permits and 37% of all violations			

HOMEBUILDER GUIDELINES

FOR EROSION AND SEDIMENT CONTROL

Sites Disturbing Less Than One Acre

Homebuilders must reduce soil loss during home construction. This fact sheet provides general erosion and sediment control (ESC) and stabilization guidelines for homebuilding and other construction that disturb less than one acre.

Each site is different. Some lots can require additional or alternative controls. Check with local officials to make sure all ESC requirements are addressed. ESC devices must handle a two-year, 24-hour rain event. A two-year, 24-hour event ranges from 1.9 inches of rain in western North Dakota to 2.3 inches of rain in the eastern part of the state over a 24-hour period.

PERIMETER CONTROLS

Perimeter controls capture soil before it leaves the construction site. These types of controls include vegetative buffers, silt fences and fiber rolls.

Vegetative buffers consist of a strip of dense grass. One foot in buffer is used for every five feet of disturbed area that drains to it.

Silt fence and fiber rolls are examples of controls used to capture sediment. Controls of this type capture sediment by ponding water behind them. Ponding allows soil to settle out of the water. A rule of thumb for silt fence is to use a one linear foot of silt fence for every 100 square feet of unslope disturbed area.

ROOF DRAINS

Roof drains need to be provided with adequate splash pads and/or downspouts extensions to prevent erosion from roof runoff.

INLET PROTECTION

Inlet protection devices keep soil out of the storm sewer system. They are a last line of control and must be used with other ESC and stabilization methods. Inlet protection devices need to be selected and installed so water can bypass the device if flooding is a concern.

STABILIZED SITE EXIT

A stabilized construction site exit reduces dirt tracked from the site. Vehicles and equipment must not exit the site from any other place, especially when wet soil conditions are present.



INSPECTIONS & HOUSEKEEPING

Inspect ESC devices every 14 calendar days and within 24 hours of 1/4 - inch rainfall.

Maintenance or repair should be completed following good housekeeping practices, which includes cleaning and maintain ESC devices, cleaning dirt off streets and picking up debris.

Clean sediment control devices such as silt fence, before sediment has reached half of the exposed height. Repair or replace the device if it is not functioning properly. Removal of sediment or device if it is not functioning properly. Removal of sediment or device repair/replacement needs to be done within 24 hours of discovery or as soon as field conditions allow.

Clean out sediment traps and basins when the storage volume is reduced by half. This must be done with 72 hours or as soon as field conditions allow.

Remove dirt from streets by the end of the work day.

ESC and stabilization must be maintained at the site until there is 70 percent vegetative cover or the site is turned over to the homeowner.

TEMPORARY & PERMANENT COVER

Temporary cover is used to reduce erosion and should be applied to areas where construction activity has ceased and is not planned to resume for 14 days. Temporary soil stockpiles such as clean aggregate, demolished concrete and sand stockpiles are exempt. Temporary cover may be obtained by planting, mulching or using an erosion control blanket.

Permanent cover is any type of cover that will not be disturbed again by construction activities.

MATERIAL STORAGE

Stockpiled material cannot be placed in any stormwater conveyance system (e.g., curb and gutter, drainage ditch).

Sediment controls need to be placed between any stockpile and stormwater conveyance system. Stockpiled material should not be placed directly against any device.

Liquid or soluble materials (e.g., oil and paint) must be stored to prevent spills or leaks.

WASTE DISPOSAL

All construction debris must be placed in an appropriate container to prevent it from being carried away by wind or water. Dispose of all debris at any appropriate facility.

CONCRETE WASH WATER

Concrete wash water cannot be placed in or allowed to drain to any surface or groundwater or storm sewer system. Place concrete wash water in an appropriate collection system.

Source: North Dakota Department of Environmental Quality

MCM 5

Post Construction Program



MCM 5 – Post-Construction Stormwater Management

The City of Fargo has developed, implemented, and enforces a post-construction pollution reduction program for new and redevelopment projects within its jurisdiction. This includes projects that disturb one or more acres and smaller projects that are part of a larger common plan of development. These “specific requirements” meet or exceed state mandated levels outlined in Appendix 1 of the North Dakota MS4 Permit - NDR04.

Chapter 37 Stormwater Management (regulatory method)

The Stormwater Ordinance establishes criteria for the post-construction stormwater program. Our program sets specific control requirements for the runoff rate and water quality treatment per site, for all development projects including those less than one acre.

Program Outline

- Storm Policy sets specific stormwater guidelines and has computation tables
- Construction/development applications must submit site plans for review/approval with stormwater features: locations, volume and runoff calculations, BMP and maintenance issues.
- Projects areas are evaluated on a per site basis under the site plan review process (see below).
- All previously undeveloped properties and subdivisions are required to provide a Storm Water Management Plan (plan) for the subject area.
- Submission and approval of the plan is required prior to plat approval.
- Failure to comply with the requirements of a site plan review results in a no build situation.

Site Plan Review Process

During the site plan review process, (a requirement set forth in the Land Development Code (LDC)) engineering evaluates all infrastructure connections and conflicting site conditions, including permanent stormwater BMPs. Non-conforming scenarios are notated and the plan returned for correction. This site plan review ensures compliance with the LDC, stormwater requirements of the North Dakota Department of Environmental Quality NDPDES construction permit (NDR11-0000) and MS4 discharge permits and the City of Fargo Stormwater Ordinance.

This process verifies the post construction aspect for permanent stormwater treatment. Each site plan submittal is reviewed via a check-off list for conforming release rates, detention volumes, pipe sizing, etc. Permanent detention features allow options to applicants regarding detention by providing large-scale (regional) retention. A Stormwater Management Report prepared by a Professional Engineer registered in the state of North Dakota, indicating compliance with the discharge rate is required for all developments. Detention/retention volume requirements will be established by the discharge limitation.

General Storm Water Requirements

Authority and Purpose

The City of Fargo operates a Municipal Separate Storm Sewer System (MS4) under authority of the North Dakota Department of Health Permit NDR04-0000 (Discharge Permit), and City of Fargo Code of Ordinances, Chapters 17 and 37. In compliance with this authority, Fargo has developed this Storm Water Policy (storm water policy). This policy establishes standards for storm water discharges and quality treatment for all development within City of Fargo jurisdiction.

Intent of the Policy

The intent of this policy is to provide guidance to those persons working with the City of Fargo **Storm Water Management Ordinance** and to establish uniform, simplified standards that work within the framework of the City's storm water infrastructure.

Target Audience

This policy is applicable to all development (ref Code of Ordinances, Chapter 37, Paragraph 37-0102 7.) falling under the jurisdiction of the City of Fargo.

Storm Water Management Plan

All previously undeveloped properties and subdivisions, re-plats of existing properties for purposes of development, or re-development of existing developed or un-developed lots one (1) acre in size or larger or part of a larger common development that is one (1) acre in size or larger shall provide a Storm Water Management Plan (plan) for the subject area. Submission and approval of the plan is required prior to plat approval. Plan requirements are discussed in **Appendix A**.

Storm Water Discharge Requirement/Limit

The maximum storm water discharge rate shall be as defined in **Appendix C** and shall apply to the following categories:

1. Newly Platted Ag Conversion that is (1) one acre in size or larger or is part of a common development 1 acre in size or larger
2. Re-plat of current parcel that is part of a common development that is (1) one acre in size or larger
3. Re-development of existing parcel that is part of a common development that is 1 acre in size or larger

Storm Water Management Plan

A Storm Water Management Plan, prepared by a Professional Engineer registered in the State of North Dakota, indicating compliance with the discharge rate and laying out in schematic form the storm sewer on site systems is required for all developments. Detention/retention volume requirements will be established by the discharge limitation and the water quality requirements.

Water Quality Treatment

Water quality treatment is required for all new developments or re-plats one (1) acre in size or larger, common developments collectively one acre or larger, and on existing parking lots receiving full re-construction (category 2 & 3 parking lot section above) that are (1) one acre in size or larger or part of a larger common development. Requirements are specified in **Appendix D**.

Storm Water Detention, Retention, and Discharge Pond Design

Appendix E outlines the requirements for storm water pond design.

Requirements within Special Zones

Appendix F outlines the design parameters and coverage area for special zone areas that have been developed into regional drainage areas.

Appendix G outlines the design parameters for areas of the Downtown Mixed Use properties (DMU)



Southwest Regional Pond




2. Downtown Mixed Use Zoning (DMU) Requirements

A modification to the storm water retention policy for the existing areas classified as within the downtown mixed use zoning district as of July 27, 2015 and approved by City Commission, this policy is as follows: Any development on a parcel one acre in size or larger within the DMU shall be allowed a maximum storm water runoff rate that is not greater than the existing conditions runoff rate from the parcel for the 2, 10 & 100 year, 24 hour synthetic rainfall events. No storm water retention will be required on the parcel unless necessary to maintain the runoff rate below the existing (pre-development) runoff rate. Lots under 1 acre are exempt from the retention requirements.

This change in policy does not affect the North Dakota Department of Health's water quality requirements. All development of any parcels within the DMU would still be required to follow, as applicable, these water quality requirements set by the Department of Health.

For parcels completing a zoning change to DMU after the effective date of July 27, 2015, property improvements will meet all storm water retention standards per the policy.

Summary of Storm Sewers in Use

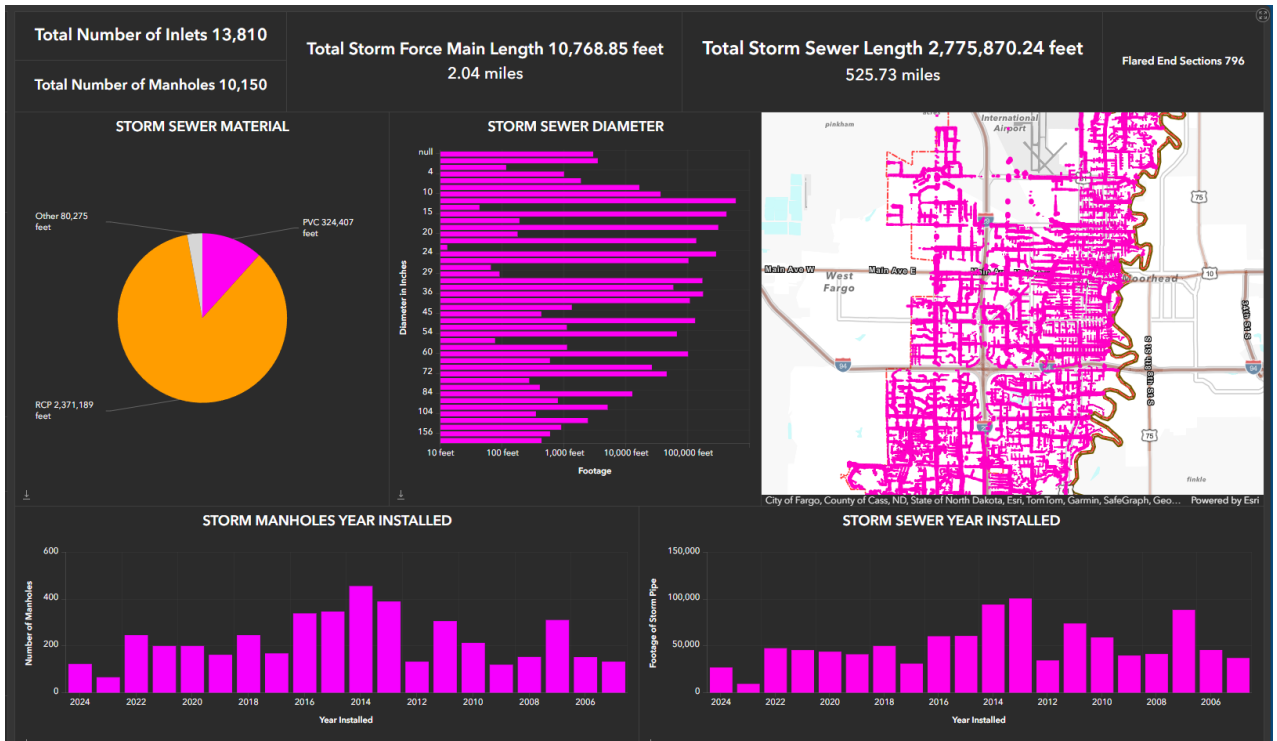

Fargo Storm Sewer System


Area = 50 square miles

Storm Lift Stations = 82

Storm Sewer	Does the stormwater system connect to the City of Fargo system?	<input type="checkbox"/>	Section 20-0608
	If not tied into the City system, is proper documentation for not connecting indicated?	<input checked="" type="checkbox"/>	
	Is the pipe the correct size and type?	<input type="checkbox"/>	Spec Section 1500
	Is the pipe at the correct grade? Does it flow correctly?	<input type="checkbox"/>	Spec Section 1500
	Are inlets and manholes appropriately located and spaced?	<input type="checkbox"/>	Spec Section 1500
	Is Reinforced Concrete Pipe (RCP) used under pavement in the City Right-of-Way?	<input type="checkbox"/>	
	If boring under the street - may use C900 pipe with adequate depth.	<input type="checkbox"/>	
	Are pond outlet structures located outside the 10' Utility easement?	<input type="checkbox"/>	Submittal
	Is there a note stating to call the Inspections Dept. for an inspection of the connection to the City storm system?	<input type="checkbox"/>	
	Ensure storm sewer does not conflict with other underground utilities.	<input type="checkbox"/>	Submittal
Grading	Is there a Grading Plan?	<input type="checkbox"/>	Submittal
	Does the grading plan clearly indicate (arrows and/or elevations) where all site storm water flows?	<input type="checkbox"/>	Submittal
	Is there a 0.5 foot elevation difference between the sidewalk and curb?	<input type="checkbox"/>	Submittal
	Is the elevation 15 feet from structures at BFE or above (check pond slopes)?	<input type="checkbox"/>	Submittal
	Are maximum recommended pond slopes (4:1) exceeded?	<input type="checkbox"/>	Submittal
Storm water	Are HydroCAD (or similar) stormwater model results for the 2 and 100 year storm events included in the submittal?	<input type="checkbox"/>	Submittal
	Does the project involve over 1,000 SF of parking lot?	<input type="checkbox"/>	
	Is the project part of a previously approved larger stormwater plan?	<input type="checkbox"/>	
	Does site imperviousness meet the approved plan parameters?	<input type="checkbox"/>	
	Is on-site storm water detention required?	<input type="checkbox"/>	Detention Policy
	Do detention volumes and discharge rates meet requirements? Check min. 4" orifice	<input type="checkbox"/>	Detention Policy
	Is there a 24 -72 hour drawdown period for the 2 year event? Or, is there a "Defender" device?	<input type="checkbox"/>	State water quality
ESC/SWPPP	Is there an Erosion and Sediment Control Plan?	<input type="checkbox"/>	Submittal
	Does the Erosion and Sediment Control (ESC) plan include all necessary ESC measures?	<input type="checkbox"/>	Submittal
	Does the Erosion and Sediment Control plan include all the appropriate and necessary details?	<input type="checkbox"/>	Submittal
Paving	Is there a Paving Plan?	<input type="checkbox"/>	Submittal
	Does the paving plan clearly indicate paving types and locations?	<input type="checkbox"/>	Submittal
	Is street access appropriate for the pavement functional classification (arterial, collector, local)?	<input type="checkbox"/>	Section 20-0702
	Do driveway widths, placement (spacing), and thickness meet requirements?	<input type="checkbox"/>	
	Do patches match existing pavement sections?	<input type="checkbox"/>	Submittal

POND POINTS

- POND
- DETENTION POND
- RETENTION POND
- BIORETENTION POND
- UNDERGROUND STORAGE

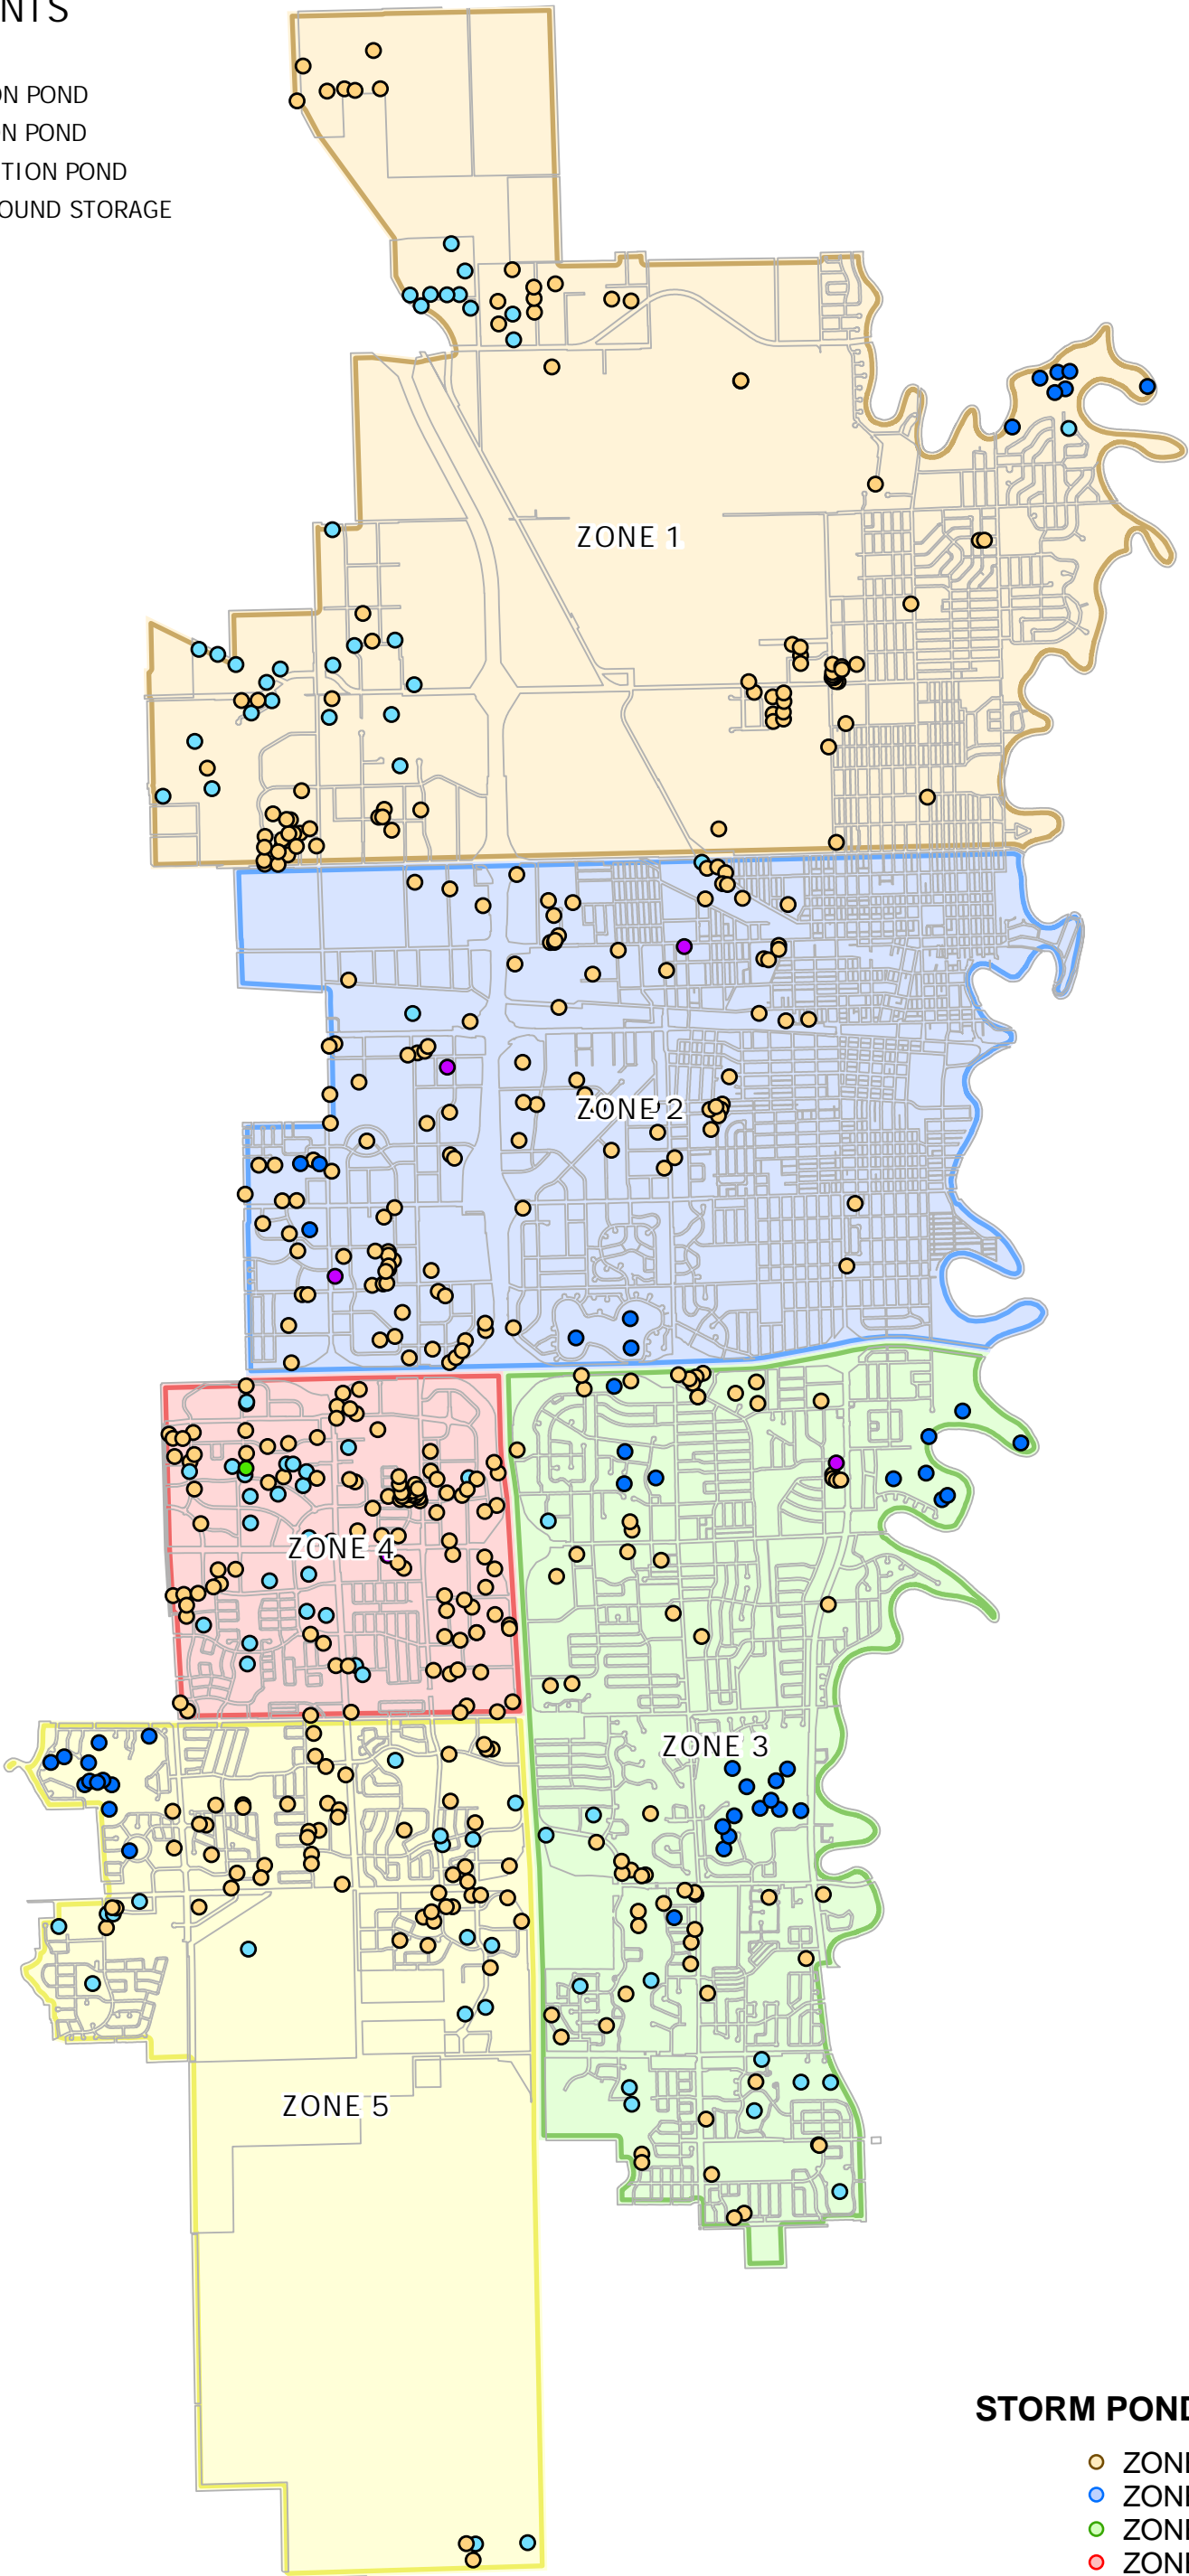

STORM PONDS PER ZONE

- ZONE 1 = 118
- ZONE 2 = 119
- ZONE 3 = 99
- ZONE 4 = 129
- ZONE 5 = 85



Standard Operating Procedure (SOPs) for Stormwater Pond Inspections

Procedure

At a minimum, 20% of all Stormwater ponds will be inspected each year on a rotating basis with all ponds inspected before the expiration of the NDR04-0000 MS4 Permit.

- Pond Inventory (January 2022)
 - City of Fargo – 59 ponds
 - Fargo Park District – 59 ponds
 - County Owned – 4 ponds
 - Privately owned – 353 ponds
- The Storm Sewer Utilities Engineer shall manage a list of City-owned/private ponds.
- GIS will be updated when new ponds are constructed or modified.

Inspections

- Staff will visually inspect all of the ponds and end sections of the pipes draining into them at least once during a five year cycle of the NDR04-0000 MS4 Permit.
 - The goal is to inspect 20% of the drainage system each year.
 - All records shall be kept at T:\Engineering\StormMgmt\Stormwater Management\MS4 - Discharge Permit\PERMIT ADMIN\Pond Inspections

Corrective Action

- Slope/Bank erosion
 - Depending on severity submit a work order to the Public Works Supervisor.
- Blocked or damaged infrastructure
 - Report to Public Works Supervisor with report for cleaning, repair or replacement needs as their schedule allows.



Standard Operating Procedure (SOPs) for Water Quality Device

Procedure

Inspect all water quality devices and underground storage systems at least once every two years on a rotating basis in compliance with the NDR04-0000 MS4 Permit.

- Water Quality Device inventory (January 2022)
 - City of Fargo – 5 WQ devices
 - Privately owned – 103 WQ devices
- The Storm Sewer Utilities Engineer shall manage a list of City-owned/private Water Quality Devices.
- Records of newly added Water Quality Devices will be updated via spreadsheet when they are constructed or modified.

Inspections

- Staff will visually inspect all Water Quality Devices at least once every two years on a rotating basis in compliance with the NDR04-0000 MS4 Permit.
 - The goal is to inspect 50% of structures each year
 - Inspections will consist of structural condition, inflow points, pollution capture functions, sediment levels
 - All records shall be kept at T:\Engineering\StormMgmt\Stormwater Management\MS4 - Discharge Permit\PERMIT ADMIN\Private_WQ_Maintenance

Corrective Action

- Sediment Levels
 - Sediment levels will require cleaning/removal depending on the manufacturer's recommended O&M manual.
- Damaged infrastructure
 - Repair or replacement shall be required according to the manufacturer's recommended O&M manual.
 - All city owned water quality devices shall be maintained annually regardless of the manufacturer's recommended O&M manual

City of Fargo

Policy on Stormwater Discharge and Treatment Requirements

April 2023 Update

Table of Contents

General Stormwater Requirements	3
Appendix A Stormwater Management Plan	5
Appendix B Existing Parking Lot Stormwater Requirements	8
Appendix C Stormwater Discharge Requirements (Newly Platted Developments or Undeveloped Existing Plats)	9
Appendix D Re-Development of Currently Developed Properties	12
Appendix E MS4 Water Quality Design Requirements	15
Appendix F Stormwater Retention, Detention, and Discharge Pond Design	17
Appendix G Design Requirements within Special Zones	23

GENERAL STORMWATER REQUIREMENTS

Authority and Purpose

The City of Fargo operates a Municipal Separate Storm Sewer System (MS4) under authority of the North Dakota Department of Environmental Quality Permit NDR04-0000 (Discharge Permit), and City of Fargo Code of Ordinances, Chapters 17 and 37. In compliance with this authority, Fargo has developed this Policy on Stormwater Discharge and Treatment Requirements. This policy establishes standards for stormwater discharge rates and stormwater quality treatment for all development within the City of Fargo's jurisdiction.

Intent of the Policy

The intent of this policy is to provide guidance to those persons working with the City of Fargo **Stormwater Management Ordinance** and to establish uniform, simplified standards that work within the framework of the City's storm sewer infrastructure.

Target Audience

This policy is applicable to all development (Code of Ordinances, Chapter 37, Paragraph 37-0102 7.) under the jurisdiction of the City of Fargo.

Stormwater Management Plan

All previously undeveloped properties and subdivisions; re-plats of existing properties for purposes of development; or re-development of existing developed or un-developed lots one (1) acre in size or larger, or part of a larger common development that is one (1) acre in size or larger, shall provide a Stormwater Management Plan (plan) for the subject area.

Submission of a schematic stormwater management plan shall be included with submittal of the draft plat for approval. Submission and approval of the full stormwater management plan is required prior to construction plan approval. Stormwater management plan requirements are discussed in **Appendix A**.

Existing Parking Lot Stormwater Requirements

Stormwater management requirements for existing parking lots are outlined in **Appendix B**.

Stormwater Discharge Requirement/Limit

The maximum stormwater discharge rate as defined in **Appendix C** or **Appendix D** shall apply to the following categories:

1. Newly Platted Ag Conversion that is (1) one acre in size or larger or is part of a common development one acre in size or larger (**Appendix C**).
2. Re-plat of currently platted parcel that is part of a common development that is one acre in size or larger and is currently undeveloped (**Appendix C**).
3. Re-development of existing parcel that is one acre in size or larger, or is part of a common development that is one acre in size or larger (**Appendix D**).

Water Quality Treatment

Water quality treatment is required for all new developments or re-plats one (1) acre in size or larger, common developments collectively one acre or larger, re-development sites one acre or larger, and on existing parking lots as outlined in **Appendix B**. Requirements for water quality treatment are specified in **Appendix E**.

Stormwater Detention, Retention, and Discharge Pond Design

Appendix F outlines the requirements for stormwater pond design.

Design Requirements within Special Zones

Appendix G covers the design parameters and coverage area for special design requirement areas, including areas that have been developed with regional drainage facilities, and the Downtown Mixed Use zoning area.

APPENDIX A

STORMWATER MANAGEMENT PLAN

1. The Stormwater Management Plan schematic preliminary drawing and final plan shall be prepared by a Professional Engineer registered in the State of North Dakota.
2. All newly platted Ag Conversion properties, new subdivisions within a larger common development, and infill projects within a larger platted development equal to or greater than 1 acre in size are required to have a stormwater management plan that includes those Best Management Practices (BMPs) required for the addition or subdivision to meet stormwater quality and quantity requirements. Approval of the regional stormwater management plan is considered part of the plat approval process.
3. Previously platted lots less than one acre in size, which are part of a larger common development, will be required to have a stormwater management plan when the lot is developed. This stormwater management plan shall analyze the impact this newly improved lot will have on the overall stormwater features of the common development. As a minimum, these lots shall drain to a common inlet that is connected to the City storm sewer system, while meeting the allowable release rate and water quality requirements.
4. Article 37-0201 of the City of Fargo Code of Ordinances states: “An owner must submit to the City Engineer a plan for stormwater management and control including detention and retention facilities. The plan shall be submitted, and approval obtained from the City Engineer prior to the owner (a) obtaining approval of an application for a plat, pursuant to Section 20-0907 of the Land Development Code of the City, or (b) engaging in any land disturbing activity.”

The plan may include “in the discretion of the City Engineer, arrangements for further planning and implementation of permanent facilities for stormwater management and control by subsequent owners of the property being platted or by the current owner at a later time.” Delay in producing the stormwater plan will be considered when extenuating circumstances dictate but will generally not be allowed.

5. The stormwater management plan, at a minimum, shall consist of:
 - a) A Stormwater Management Plan Report prepared using a stormwater modeling system that provides a modeling report similar in nature to HydroCad. The report shall document the assumptions, methodologies, and analysis used in arriving at the selected stormwater management solution. The report must be global, in that it looks at the entire area to be developed as well as any impacts to the site created by neighboring areas. The report shall be conceptual in nature and include:

1. A narrative describing the existing site conditions, proposed site conditions, types and locations of stormwater BMPs proposed to be used.
 2. Model calculations for the post-development 2-, 10-, and 100-year storm events as identified under the most current NOAA Atlas precipitation data for Fargo.
 3. Hydrographs depicting flows into and out of all detention/retention facilities and all flows into the City storm sewer system.
- b) Conceptual plan drawings and topographic maps noting all items covered in the report.
1. A detailed drawing of the outlet structure indicating maximum water elevations for the 2-, 10-, and 100-year storms.
 2. A written description of the proposed water quality treatment method.
- c) Conceptual Operations and Maintenance (O&M) plan for the system, covering all requirements for keeping the system operating as designed.

The above-noted items shall be stamped and signed by a Professional Engineer registered in the State of North Dakota.

6. The plan may utilize regional or on-site detention/retention and water quality facilities; however, per the Fargo Comprehensive Plan, the City prefers to see stormwater facilities constructed as regional amenities whenever possible. A regional stormwater plan can use any combinations of BMPs, selected by the owner and their engineer, which enable the benefitting properties to meet the stormwater quantity and quality requirements. If a regional facility is used, the pond shall be located to facilitate capture of as much site stormwater as possible prior to discharging into the City stormwater system.
7. The submitted conceptual stormwater plan will be reviewed by the City's Engineering Department. The Engineering Department will evaluate the stormwater plan and communicate change requirements or recommendations to the owner and their engineer. Changes made to the stormwater plan prior to plat approval will be considered part of the original plan. If the plan is very complex, it may be brought before the City Commission for discussion and/or public comment prior to approval.
8. If a subdivided property is covered by a previously approved stormwater plan, the previously approved plan shall be reviewed to determine if the subdivided property is still in compliance. A letter from a North Dakota Registered Professional Engineer can accomplish this with City Engineer review and approval.

9. The approved plan will exist for the life of the subject property, including any changes approved by the City Engineering Department. The final approved plan will be included with the amenities plan.
10. The plan may require dedication of stormwater or access easements or additional right-of-way for the construction of stormwater conveyance and/or storage facilities.
11. The plan must ensure the subject area conforms to the site specific performance requirements noted in **Appendices B, C, D, and E** of this policy.

APPENDIX B

EXISTING PARKING LOT STORMWATER REQUIREMENTS

Current parking lots being maintained, repaired, replaced, or expanded shall comply with the requirements outlined in this Appendix and shall follow the following categories.

1. Application of these requirements and whether or not City storm sewer is available within a reasonable distance of the site shall be as determined by the City Engineer.
2. Parking lots that expand over time beyond the original grandfathered project may add enough impervious surface through surfacing or added buildings to trigger stormwater requirements.
3. Existing Parking Lot maintenance or repairs, including up to complete removal of asphalt or concrete surfacing, localized repair of gravel or subgrade, or surface treatments (spray coatings, chip/fog seals, crack sealing, striping), with no expansion of the current parking areas and result in no change in drainage, will be exempt from the stormwater requirements.
4. For existing parking lots that are (1) one acre to under (3) three acres and that involve full asphalt or concrete removal, or extensive gravel and subgrade modifications, or mill and overlays that result in modification of drainage patterns, the site shall be required to collect on-site stormwater into inlets, add a water quality device, and convey stormwater into the City stormwater system. A pre-versus post-development drainage study shall be done. If the post-construction flows are the same or less than the pre-construction flows, then no detention is required. If the post-construction flows are larger, then detention shall be required to mitigate the increase in flow only.
5. Existing parking lots (3) three acres or larger that involve full parking lot reconstruction (to include full pavement & base removal) shall be required to collect on-site stormwater in inlets and convey stormwater into the City storm sewer system, and shall comply with stormwater requirements contained in **Appendices C/D and E** for modeling, discharge rate control, and water quality for the existing parking lot being reconstructed and improved.
6. A pre-post stormwater model shall be accomplished for any site, one acre or larger, on which a building addition/expansion is triggering expansion of the parking lot(s). If the post-construction model results in a greater stormwater discharge rate than the pre-construction model during the 100-year event, discharge rate of the added volume shall meet City discharge rate requirements. If the new impervious area is over one acre, water quality requirements must also be met.

APPENDIX C

STORMWATER DISCHARGE REQUIREMENTS (NEWLY PLATTED DEVELOPMENT OR UNDEVELOPED EXISTING PLATS)

1. The discharge rate for stormwater discharging from any site, equal to or greater than 3 acres in size, into any drain system within City jurisdiction, shall be limited to 1 cfs/acre. For parcels between 1 and 3 acres, the maximum discharge shall be per the following table:

Parcel Size (Acres)	Release Rate (cfs)
1.0	2.00
1.1	2.05
1.2	2.10
1.3	2.15
1.4	2.20
1.5	2.25
1.6	2.30
1.7	2.35
1.8	2.40
1.9	2.45
2.0	2.50
2.1	2.55
2.2	2.60
2.3	2.65
2.4	2.70
2.5	2.75
2.6	2.80
2.7	2.85
2.8	2.90
2.9	2.95
3.0	3.00

This table shall apply to all projects covered under this policy except existing parking lots, which are addressed in **Appendix B**, and re-development of currently developed properties, which are addressed in **Appendix D**.

2. A stormwater report is required for all developments one acre in size or greater or if part of a larger common development that is one acre or larger. The report must comply with the requirements specified in **Appendix A**.
3. All sites except existing parking lots (as described in **Appendix B**) are required to comply with the State Water Quality Design Considerations. Water Quality Design Consideration information is included as **Appendix E** to this policy.
4. The discharge rate noted above will drive detention requirements for a particular site. Dry or wet ponds, oversized pipe, underground stormwater storage facilities, or other methods can be used to achieve required storage volumes.

If a regional detention system, as opposed to site-specific ponds, is chosen for the development area, all water shall be routed to the regional pond prior to discharge into the City system. The original, conceptual stormwater plan (see **Appendix A**) must address the conveyance of stormwater from all parcels in the development to the regional detention facility and shall cover all details of operation and maintenance responsibilities.

If the City of Fargo storm sewer system provides conveyance to the regional facility, the 1 cfs/acre criteria shall be used unless otherwise planned for. If the owner requires larger flows to the regional facility, this must be considered/negotiated during the development of the original regional stormwater plan and the original amenities plan (such as parallel storm sewer lines or open channel flow to existing ponds).

5. Discharge or overland flow of stormwater onto a neighboring property shall not be allowed unless included in the regional plan (see **Appendix A**) and facilitated through the designation of required easements, dedications, or other methods allowing such conveyance.
6. The State of North Dakota Water Quality standards must be met. The method of treatment shall be selected by the design engineer from the options presented in **Appendix E** or as approved by the City Engineer.

Construction of rain gardens, grassy swales, and other methods of achieving water quality are encouraged and will be evaluated on a case-by-case basis.

7. Criteria for construction of regional detention facilities is discussed in **Appendix F**.
8. Each plan set submittal requiring retention/detention shall include a storm system table identifying:
 - Lot size (acreage and square feet)
 - % impervious area

- Required retention/detention volume (100-year storm event)
- Supplied retention/detention volume (100-year storm event)
- Water quality method being proposed, including manufacturer's data
- Allowable release rate for 100-year event (cfs)
- Actual release rate for 100-year event (cfs)

APPENDIX D

RE-DEVELOPMENT OF CURRENTLY DEVELOPED PROPERTIES

- For re-development of currently developed properties, Fargo has increased the allowable release rates to take into account expected existing impervious areas. It should be noted that increases in the release rates for 1 to 4 acre sites is greater than the rate increases for 4 to 8 acres. Fargo believes that re-developments of 4 to 8 acres have more latitude to accommodate stormwater runoff mitigation within the design. The stormwater discharge rate from any site, equal to or greater than 8 acres in size, into any drain system within City jurisdiction, shall be limited to 1 cfs/acre. For parcels between 1 and 8 acres, the maximum discharge shall be per the following table:

Parcel Size (acres)	Allowable Release Rate (cfs)
1	3
1.5	3.77
2	4.53
2.5	5.3
3	6.07
3.5	6.83
4	7.6
4.25	7.64
4.5	7.68
4.75	7.72
5	7.76
5.25	7.79
5.5	7.82
5.75	7.85
6	7.88
6.25	7.9
6.5	7.92
6.75	7.94
7	7.96
7.25	7.97
7.5	7.98
7.75	7.99
8	8

This table shall apply to all projects covered under this policy except existing parking lots, which are addressed in **Appendix B**, and newly platted development or existing undeveloped plats, which are addressed in **Appendix C**.

In no circumstance shall the allowable release rate from a re-development lot be greater than the pre-redevelopment release rate. The current condition of the lot shall be evaluated up to 5 years prior to re-development to determine existing impervious values for determining acceptable release rates.

2. A stormwater report is required for all developments one acre in size or greater or if part of a larger common development that is one acre or larger. The report must comply with the requirements specified in **Appendix A**.
3. All sites except existing parking lots (as described in **Appendix B**) are required to comply with the State Water Quality Design Considerations. Water Quality Design Consideration information is included as **Appendix E** to this policy.
4. The discharge rate noted above will drive detention requirements for a particular site. Dry or wet ponds, oversized pipe, underground stormwater storage facilities, or other methods can be used to achieve required storage volumes.

If a regional detention system, as opposed to site-specific ponds, is chosen for the development area, all water shall be routed to the regional pond prior to discharge into the City system. The original, conceptual stormwater plan (see **Appendix A**) must address the conveyance of stormwater from all parcels in the development to the regional detention facility and shall cover all details of operation and maintenance responsibilities.

If the City of Fargo storm sewer system provides conveyance to the regional facility, the 1 cfs/acre criteria shall be used unless otherwise planned for. If the owner requires larger flows to the regional facility, this must be considered/negotiated during the development of the original regional stormwater plan and the original amenities plan (such as parallel storm sewer lines or open channel flow to existing ponds).

5. Discharge or overland flow of stormwater onto a neighboring property shall not be allowed unless included in the regional plan (see **Appendix A**) and facilitated through the designation of required easements, dedications, or other methods allowing such conveyance.
6. The State of North Dakota Water Quality standards must be met. The method of treatment shall be selected by the design engineer from the options presented in **Appendix E** or as approved by the City Engineer.

Construction of rain gardens, grassy swales, and other methods of achieving water quality are encouraged and will be evaluated on a case-by-case basis.

7. Criteria for construction of regional detention facilities is discussed in **Appendix F**.
8. Each plan set submittal requiring retention/detention shall include a storm system table identifying:
 - Lot size (acreage and square feet)
 - % impervious area
 - Required retention/detention volume (100-year storm event)
 - Supplied retention/detention volume (100-year storm event)
 - Water quality method being proposed, including manufacturers' data
 - Allowable release rate for 100-year event (cfs)
 - Actual release rate for 100-year event (cfs)

APPENDIX E

MS4 WATER QUALITY DESIGN REQUIREMENTS

The following information is taken from page 29 of the current North Dakota NDR04-0000 MS4 Permit, dated April 1, 2021 and effective to March 31, 2026.

Water Quality

A water quality treatment system is required in developments as defined under **Appendices B, C, & D**. The system must meet the minimum standards specified below.

The post-construction controls outlined below are intended to manage water quality by reducing pollutants carried in the first flush of stormwater runoff.

The design considerations for treating a water quality volume for common post-construction controls are as follows:

Control	Water Quality Design Consideration
Wet Detention Ponds	Water Quality Volume (V_{wq}) = 1800 ft³ per impervious acre draining to the pond. The drawdown time for the V_{wq} should be a minimum of 12 hours.
Dry Detention Ponds (w/Extended Detention)	Extended Detention / Water Quality Volume (V_{wqed}) = 1800 ft³ per impervious acre draining to pond. The drawdown time for the V_{wqed} should be a minimum of 24 hours and not more than 72 hours.
Infiltration	Water Quality Volume (V_{wq}) = 0.5 inches from impervious area. The volume captured in rain gardens, or passed through bio filters with under drains, would be grouped with infiltration for water quality treatment.
Flow-Through Treatment Devices	Size devices to treat the first 0.5 inches of runoff from impervious area.
Redevelopment / Retrofit	Incorporate water quality criteria by reducing impervious surface area and implementing controls to treat the first 0.5 inches of runoff from impervious areas.

The water quality criteria apply to on-site or regional systems for post-construction stormwater management. The water quality considerations do not replace or substitute for water quantity or floodplain management requirements for development. The water quality features may be incorporated into the design of structures for flow control or water quality control may be achieved with separate features. Flow-through treatment devices

such as “Defenders™” shall provide a minimum of 80 percent removal of sediment with a particle size distribution equivalent to the standard OK-110 at a feed concentration of 300 mg/L. The treatment device design shall include a bypass for storm flows above the ½” rain event from the impervious area being served.

If it is impractical to meet the water quality criteria, alternative practices may be used (e.g., grassed swales, smaller ponds, or grit chambers). If a combination of practices is used, the water quality volume is accounted for on a percentage basis. Low impact development and/or green infrastructure practices may be used as an alternative to post-construction controls.

The selection and design of post-construction controls must consider clogging or obstructions, freeze-thaw cycles, effects on slope stability and groundwater, and the ability to effectively maintain the control. Design post-construction controls for ease of inspection and maintenance access (e.g., a stabilized access that allows equipment to enter a pond).

Recommended resources for planning and designing controls for urban stormwater runoff are found in the “North Dakota Stormwater Criteria Manual”: <https://www.dot.nd.gov/manuals/design/designmanual/designmanual.htm>

The property owner is responsible for operating and maintaining the water quality device in accordance with the manufacturer’s recommendations. The property owner shall maintain records of maintenance of the water quality device and shall prepare an annual inspection report. These records are to be maintained with the property owner and shall be made available to the City upon request.

APPENDIX F

STORMWATER DETENTION, RETENTION, AND DISCHARGE POND DESIGN

The following information shall apply to Standard Regional Pond Design.

Design Requirements

Pond design shall be in conformance with the current NDPDES permit.

Minimum pond design shall be for a 100-year storm event based upon the most recent NOAA Atlas 14 Point Precipitation Frequency Estimates data, and shall include one (1) foot freeboard. All design modeling shall be done using HydroCAD or equal commercially available modeling software that produces similar model reporting as HydroCAD. The designer shall provide to the City a drainage report signed by a ND Professional Engineer and shall provide an electronic copy of the complete design drainage model.

Drainage and pond modeling shall include 2-, 10-, and 100-year, 24-hour rainfall events as part of the analysis.

The pond design shall include a control outlet structure with emergency overflow design. The overflow structure shall include provisions to prevent overflows from affecting adjoining properties. The outflow and overflow structure shall be designed to prevent plugging, be easily accessible to maintenance personnel, and shall require minimal maintenance. Maximum outflow to a City storm sewer shall be as defined in **Appendices C and D**. The release rate may be less depending on measures needed to meet water quality standards as defined in **Appendix E**. However, the minimum outlet orifice size shall be 4 inches and shall have a screen ahead of the orifice to prevent plugging.

The pond drawdown time criteria is outlined in **Appendix E**.

Geometry

Pond design shall include 15 feet minimum of level ground from the top of back slope of the pond to the property line.

Dry Pond:

1. Slopes shall be 5:1 or flatter up to 15 foot of vertical depth, 6:1 or flatter if 15 foot of vertical depth or greater.
2. 1.5% grade in pond bottom to low flow channel and 0.4% grade from pond inlet to pond outlet with channel liner and 1% grade from pond inlet to pond outlet without channel liner.

3. Dry ponds do not require a safety bench and slope protection armoring if less than or equal to 10 feet deep. Dry ponds do require a safety bench and slope protection armoring if greater than 10 feet deep.
4. Dry ponds require a sloped pond bottom and an underdrain system sufficient to maintain a “dry” state.

Wet Pond:

1. Slopes shall be 6:1 or flatter up to 15 feet of depth. If the designer wishes the pond to be deeper than 15 feet, a geotechnical evaluation of the pond slope stability is required. If the pond backs up to residential homes or legal drains, a geotechnical evaluation of the pond slope stability is also required. The pond shall be designed with safety features such as edge plantings to deter entrance to ponds and a safety ledge or bench at pond perimeter one to two feet below normal water level and extend out 10 feet before continuing on slope.
2. Slope protection shall be installed to one foot below safety bench, or one foot above and one foot below normal water level, whichever is greater. The slope protection shall be riprap or turf reinforcement with seeding.
3. The remainder of exposed slopes shall be turf reinforced and seeded. Rip rap shall meet City of Fargo and NDDOT standards.

All pond aesthetic features such as shape, side slopes, and vegetation that are proposed shall be identified on the plans and match the land area requirements identified in the Zoning Ordinance and project development master plan.

City Ownership of Ponds

The City may take ownership of a stormwater pond that is designed according to the following criteria:

1. To qualify as a regional pond for purposes of City ownership and maintenance, the minimum pond size for a **dry pond shall be 7.5 acre-feet** with a minimum bottom width of 100 feet. The minimum pond size for a **wet pond shall be 15 acre-feet** with an average bottom width of 100 feet. However, the City will review on a case-by-case basis whether a pond qualifies as a regional pond for purposes of City maintenance if its size is smaller than the minimum size identified.
2. A City-owned regional pond should have sufficient right-of-way access for routine and special maintenance as determined by the City Engineer.

3. For ponds to be accepted by the City for maintenance and operation as a regional pond, the features in general shall not result in unusual and/or costly future operation and maintenance, as determined by the City Engineer. Bridges and box culverts, if required, shall meet the design criteria of the regulating authority and shall meet State and Federal safety standards.
4. No fountains or bubblers shall be allowed within City-owned regional wet ponds.


Alternative Design

Ditches, swales, and channels may be designed for a variety of capacities depending on the protection required. When ditches serve as a primary surface water collector in the upper part of a drainage basin, they shall be designed per NDCC 89-14-01 except that as a minimum, shall convey the 10-year storm event without ponding in the roadway or adjacent private property. The City Engineer will ultimately decide if ditches, swales, or channels are allowed in lieu of conventional underground piping.


The City of Fargo Stormwater Service Charge policy identifies credits that may be achieved through building of detention or retention ponds larger than required as determined by this policy. Developers and designers are encouraged to familiarize themselves with the current Stormwater “Determination and Review Policy” for stormwater fees.

NOTES:

- 15' MAX. VERTICAL DEPTH
- MIN. POND SIZE = 7.5 ACRE/FEET
- MIN. 100' BOTTOM WIDTH
- MIN. 1' FREE BOARD FOR 100 YEAR EVENT
- NO BENCH REQUIRED




DRY POND
(15' MAX. VERTICAL DEPTH)



DRY POND
(GREATER THAN 15' VERTICAL DEPTH)


NOTE:

SIDE SLOPES DISPLAYED WITH 5X
VERTICAL EXAGGERATION



SIDE SLOPES SHALL BE 6H:1V
OR FLATTER FOR POND
DEPTHS UP TO 15' VERTICAL


WET POND
(15' MAX. VERTICAL DEPTH)

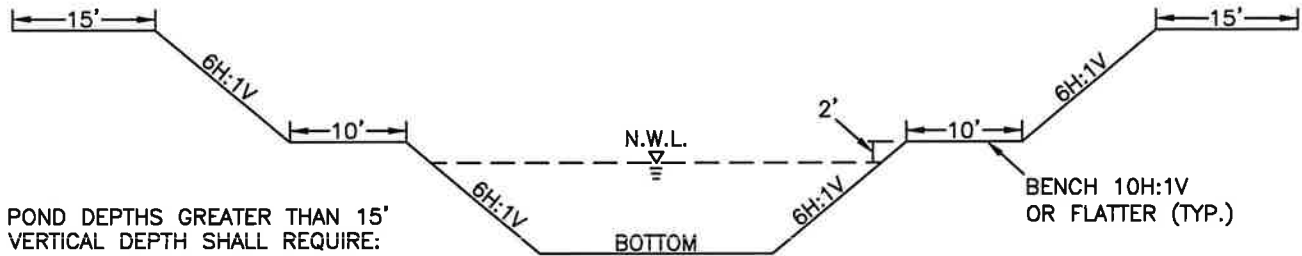

POND DEPTHS GREATER THAN 15'
VERTICAL DEPTH SHALL REQUIRE:


- GEOTECHNICAL EVALUATION
- SLOPE REINFORCEMENT

WET POND
(GREATER THAN 15' VERTICAL DEPTH)

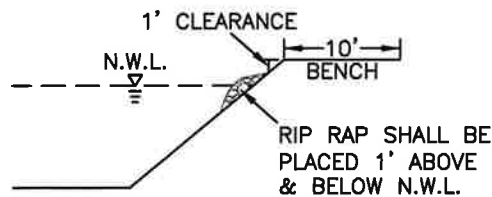


TYPICAL RIP RAP
PLACEMENT

NOTE:
SIDE SLOPES DISPLAYED WITH 5X
VERTICAL EXAGGERATION

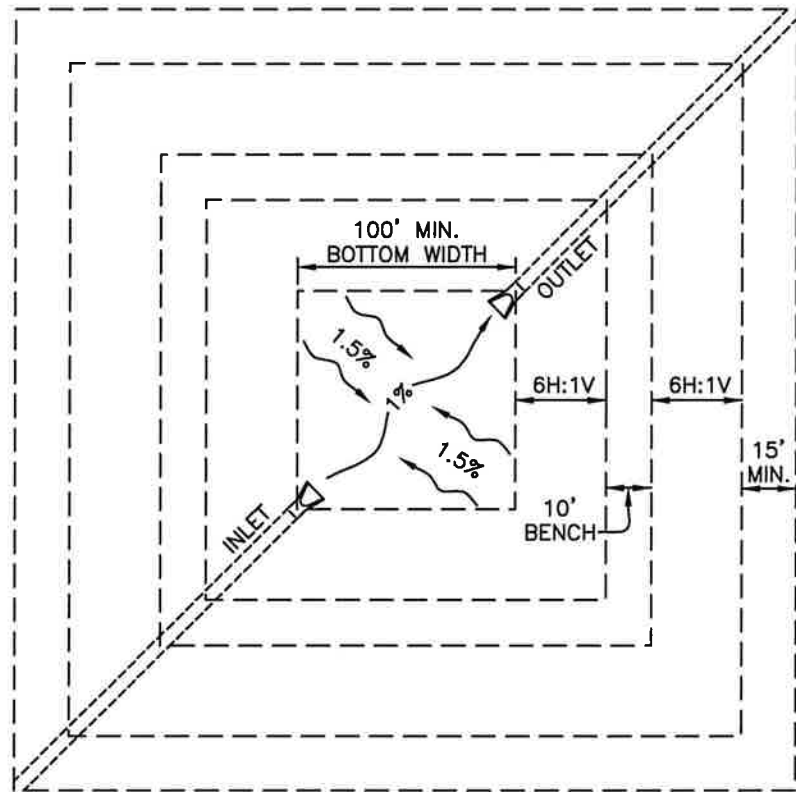

POND BOTTOM PLAN VIEW
(GREATER THAN 15' VERTICAL DEPTH)

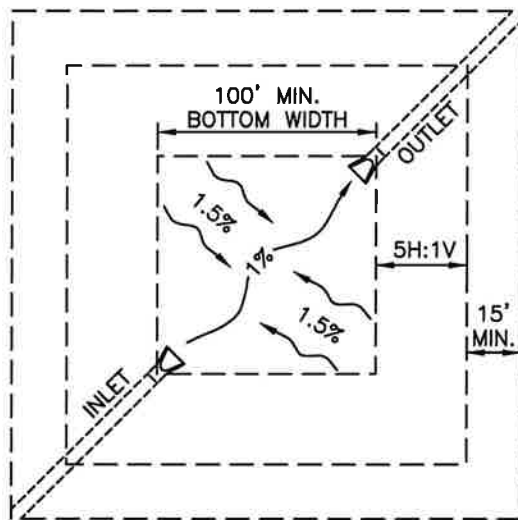

POND BOTTOM PLAN VIEW
(15' MAX. VERTICAL DEPTH)

APPENDIX G

DESIGN REQUIREMENTS WITHIN SPECIAL ZONES

Southwest Metro Stormwater Design Parameters and Pond Coverage

The following information shall apply to the coverage area for the new Southwest Metro Stormwater Pond. Properties that develop in the area shown will have regional stormwater detention and stormwater quality coverage managed by the City of Fargo. Maps of the drainage boundaries and conceptual design are found in this Appendix.

Fargo has moved forward since 2021 to construct the Lift Station and the first phase of the Southwest Metro Stormwater Pond. Drainage ditches and storm sewer piping within public rights-of-way and easements are being installed as properties and streets develop. Interim measures may be necessary to be constructed while the larger system is being fully designed and developed, due to a proposed improvement parcel's location and distance from currently completed conveyance system components. This stormwater master planning will allow properties within the area outlined to build without meeting discharge and water quality requirements outlined in this Design Policy.

However, developing properties will need to be aware that the City of Fargo designs their street storm sewers for a 2-year rainfall event on local streets and 5-year rainfall event on arterial streets, and developing properties shall design their sites to account for the limited street conveyance of stormwater if not directly discharging to the conveyance ditch system or the pond.

Downtown Mixed Use Zoning (DMU) Requirements for Stormwater

A modification to the stormwater retention policy for the existing areas classified as within the Downtown Mixed Use zoning district as of July 27, 2015 is as follows: Any development on a parcel one acre in size or larger within the DMU shall be allowed a maximum stormwater runoff rate that is not greater than the existing condition's runoff rate from the parcel for the 2-, 10- & 100-year, 24-hour synthetic rainfall events. No stormwater retention will be required on the parcel unless necessary to maintain the runoff rate below the existing (pre-development) runoff rate. Lots under one acre are exempt from the retention requirements.


This modified policy does not affect the North Dakota Department of Environmental Quality's water quality requirements. Development of all parcels within the DMU are still required to follow, as applicable, the water quality requirements set by the DEQ.

For parcels completing a zoning change to DMU after the effective date of July 27, 2015, property improvements shall meet all stormwater detention and water quality standards per the policy.


New Developments with Regional Detention and Special Release Rates

This section applies to new developments with Site Amenities Plans or Developer's Agreements that provide for regional detention, water quality, and design release rates that differ from the normal requirements covered in this design policy.

The most recent and complete record of these special design areas is available on the City of Fargo public GIS site. The GIS layer to be displayed is "StormPolicyDesignDeviations" with the modified design requirements notated within the differentiated areas.

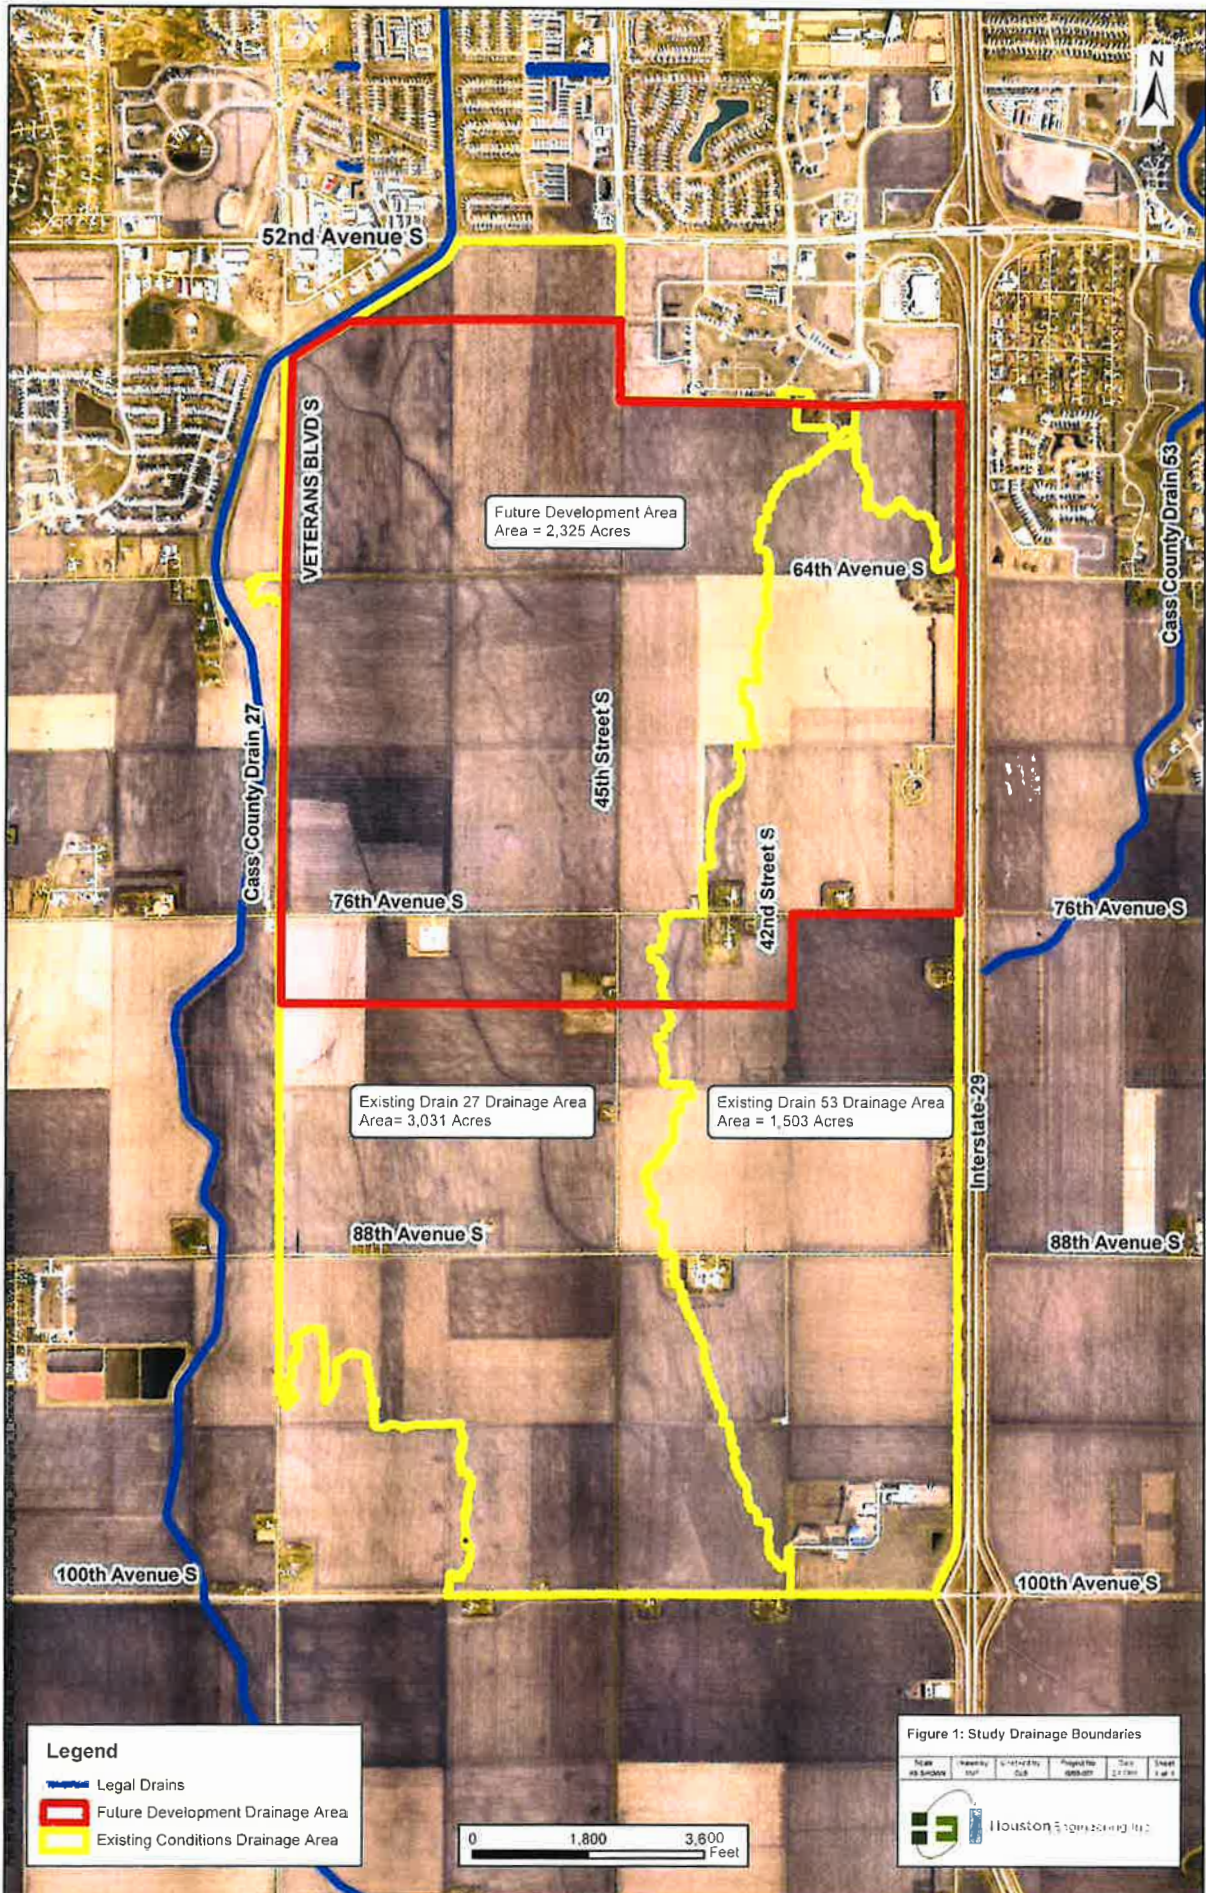

DMU July 27, 2015

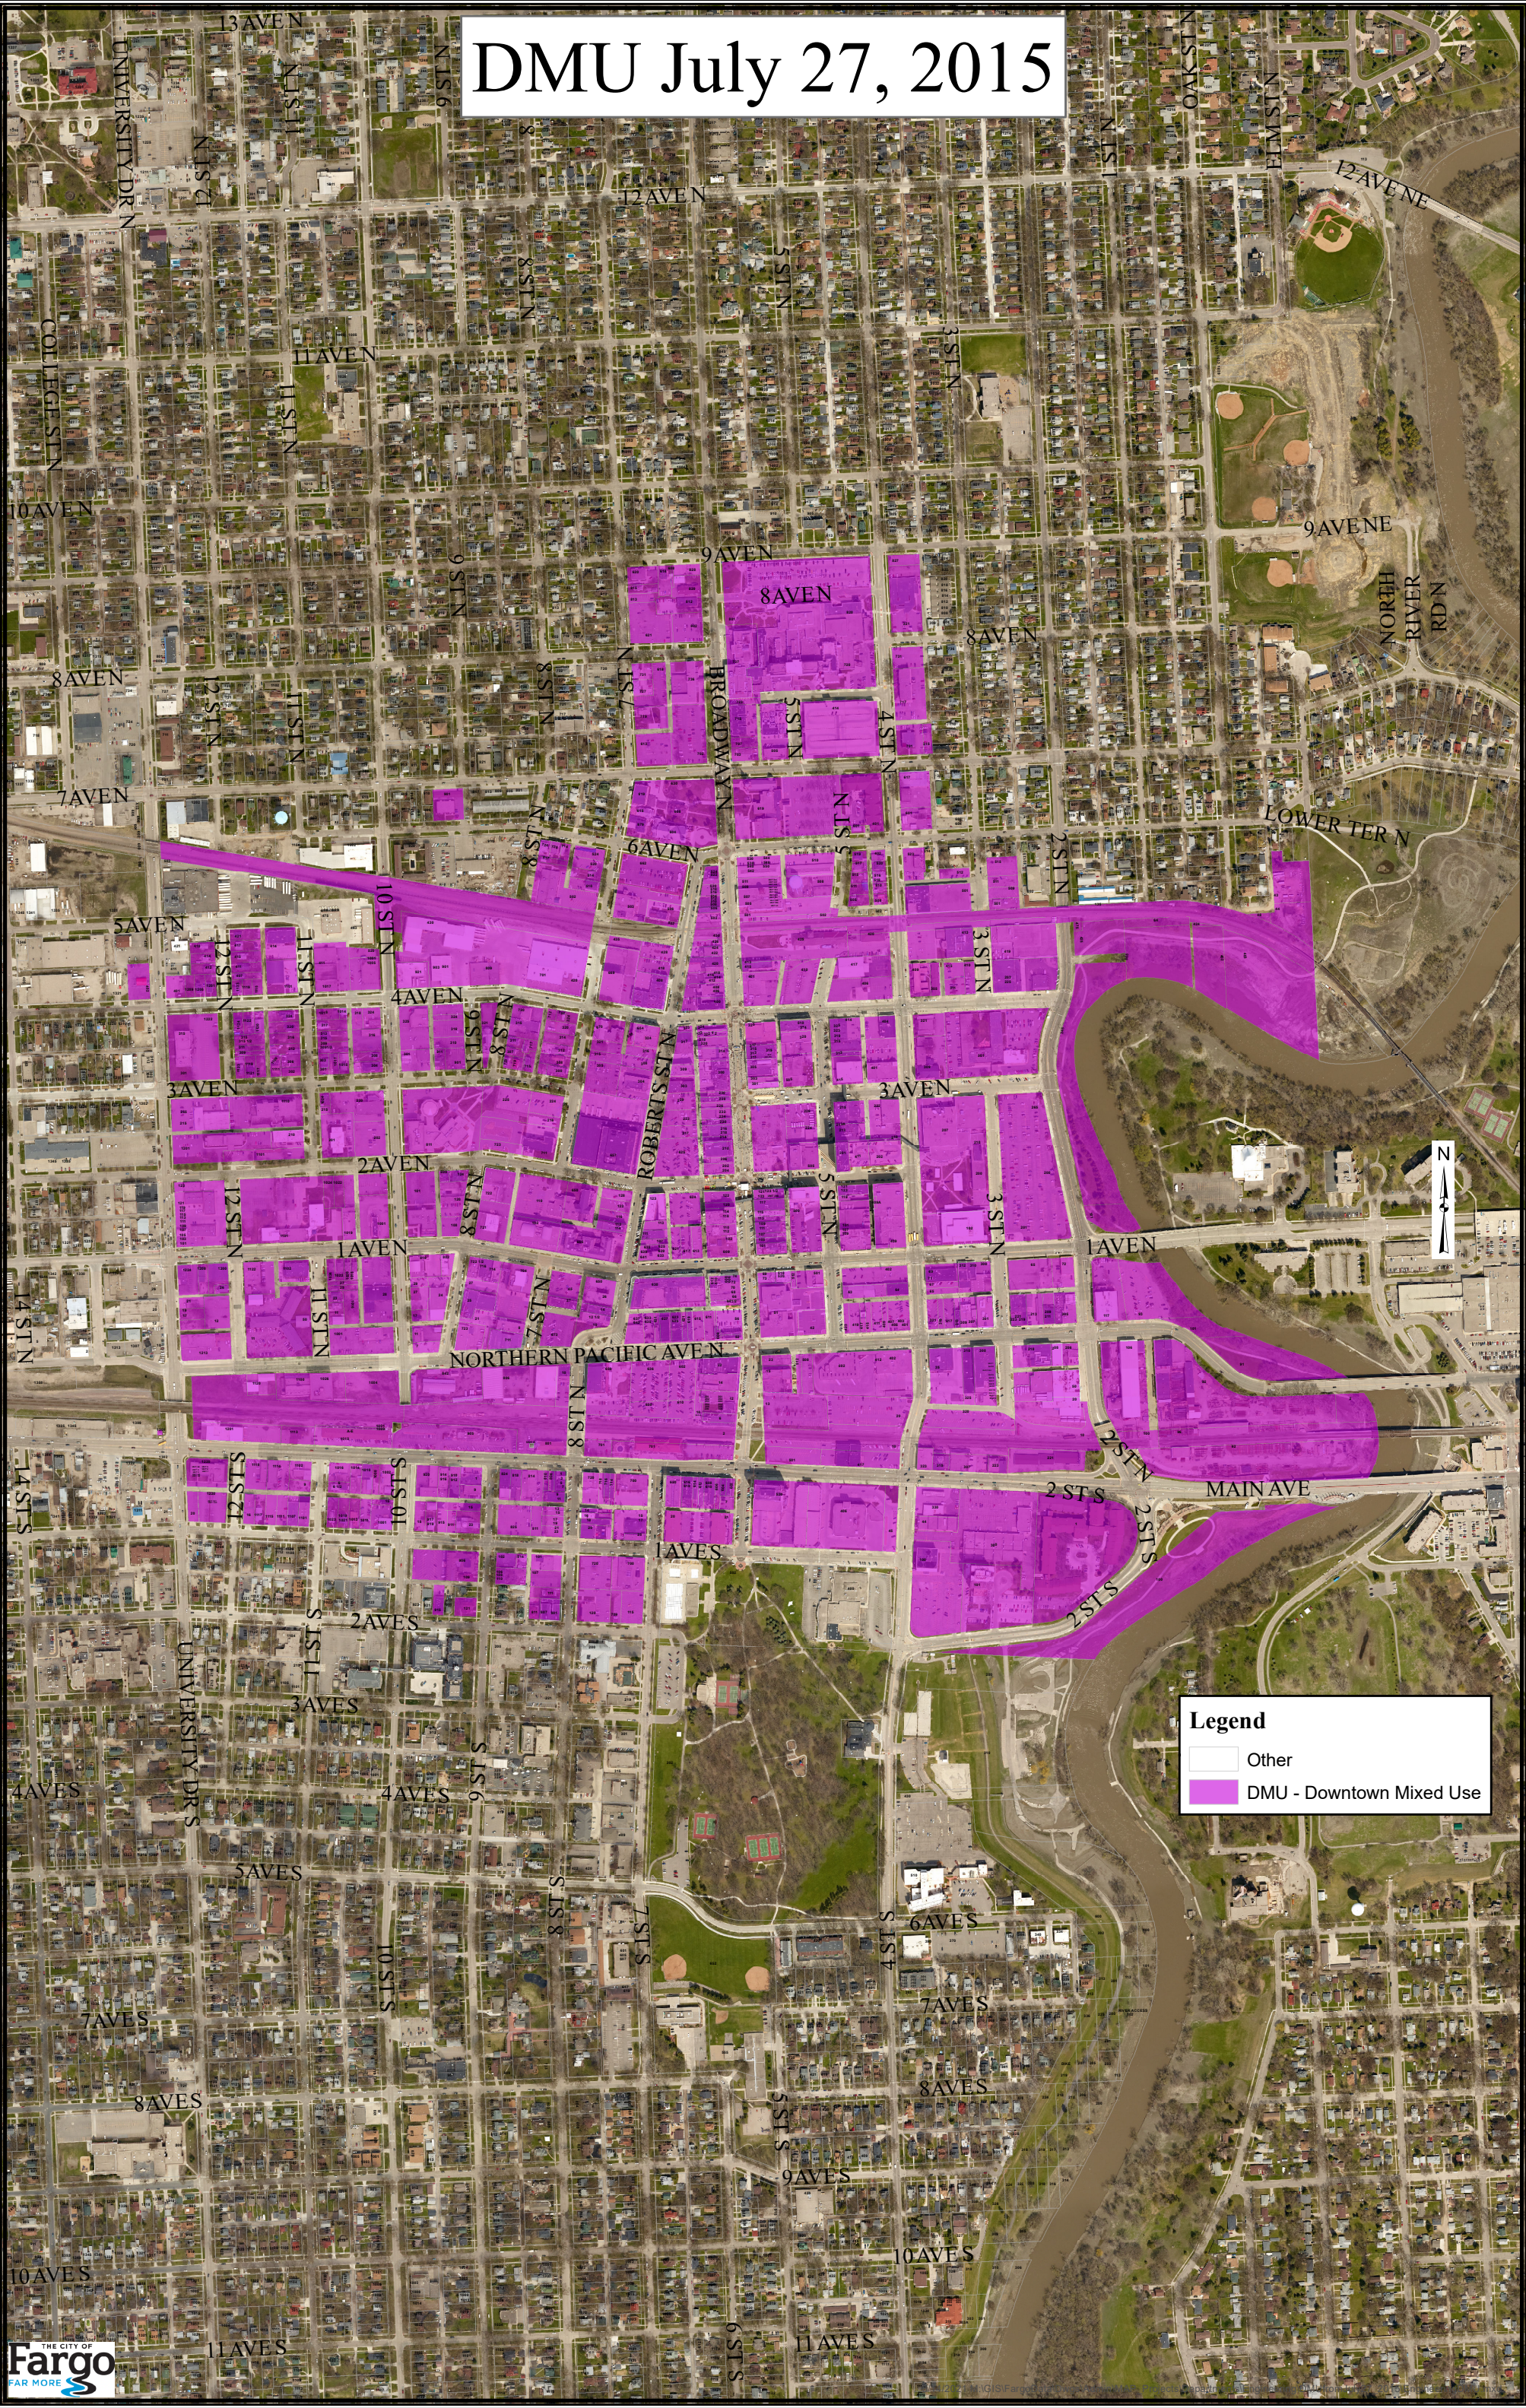

Legend

- Other
- DMU - Downtown Mixed Use

Control	Water Quality Design Consideration
Wet Detention Ponds	Water Quality Volume (Vwq) = 1800 cu-ft per impervious acre draining to the pond. The drawdown time for the Vwq should be a minimum of 12 hours.
Dry Detention Ponds (w/Extended Detention)	Extended Detention / Water Quality Volume (Vwqed) = 1800 cu-ft per impervious acre draining to pond. The drawdown time for the Vwqed should be a minimum of 24 hours and not more than 72 hours.
Infiltration	Water Quality Volume (Vwq) = 0.5 inches from impervious area. The volume captured in rain gardens, or passed through biofilters with under drains, would be grouped with infiltration for water quality treatment.
Flow-Through Treatment Devices	Size devices to treat the first 0.5 inches of runoff from impervious area.
Redevelopment / Retrofit	Incorporate water quality criteria by reducing impervious surface area and implementing controls to treat the first 0.5 inches of runoff from impervious areas.



MCM 6
Municipal Operations



Public Works Maintenance Operations

All Public stormwater features are inspected on a rotational basis annually for function, maintenance or repair by the public works/engineering departments. Those inspections resulting in major repair are forwarded to the engineering department for evaluation. Ponds and basins are inspected during maintenance activities, lined channels are cleaned and inspected annually, outfalls (and lift stations) are inspected both fall and spring.

Drain Cleaning



This department also conducts a street sweeping program on a continuous basis during non-winter months. Salt storage/fueling operations are covered and not exposed to precipitation. Salt application management continues to use technology to minimize usage. See specific MS4 requirement comments below.

Training

Stormwater training is provided to appropriate city departments and their staff on a rotating basis. SSU curriculum compliments existing department training with a stormwater validation. Most departments have their own unique training for tasks on discipline specific topics that become uniformed operational standards. Recognize, respond and report are common themes in municipal operations. Remarkably, much of their "operational" training is stormwater connected. Some examples of the "common interface" are highlighted below along with SSU educational programming for the significant operational areas of the city.

*Conveying the notion "include sound stormwater practice" into
Our everyday operations is beneficial to us all.*

Operations, IDDE Training and Awareness

The stormwater "illicit discharge" is not a new concept to operations. Maintenance operations has traditionally focused on prevention and response to incidents that detract from facility design or function standards. Below are examples of operational scenarios that are also stormwater Best Management Practice (BMP).


- If a vehicle crashed into a drainage ditch, staff discovers it, communicates the incident to a supervisor and it gets removed (under an operational directive). Cleanup is a typical duty of operations, but it is also part of the stormwater concept of IDDE. Emphasizing the need to reduce the discharge of fluids and other contaminants from such situations personifies the stormwater educational goal.
- Non-conforming sewer connections, discharges, etc., discovery, awareness, and remediation is a routine operational task. Stormwater training merely serves as a reminder to continue good operational drill because it doubles as good stormwater practice.
- Material spills training in a department's safety protocol also has a direct correlation to stormwater. Protect the employee, pairs as a stormwater BMP by the training emphasis to follow manufacturer's instructions on the use of maintenance chemicals (mixing and application).

Mowing Operations

Considering that placing mower discharges back onto the turf, is an acknowledged stormwater BMP, our operators direct all clipping discharges back onto the lawn and away from storm water conveyances. However, when needed the mower discharges will be collected, hauled and dumped.

Snow Removal Operations

Snow removal occurs on a 24/7 basis following prescribed procedures and routes. Snow is hauled to an approved dump site citywide (Mapped). These snow dump sites all have adequate grass buffers that function as BMPs and are inspected twice each season (fall & spring). Department training on the most efficient routes, dumpsite perimeter control and area limits, the stormwater education aspect is also fulfilled.

 Snow Dump Inspections 2024						
Location	Date	Time	Stormwater Conveyance	Report of Findings (condition of site)	Action to be taken	Additional Comments
12 Ave/55 St N	Spring		City Storm Sewer System	Good		Unique Winter Season limited snow accumulation
12 Ave/55 St N	8/13/2024	1:30 PM	City Storm Sewer System	Very Good	None	None
6251 36 St S	Spring		City Storm Sewer System	Very Good	dry out clean debris	Site is also stockpiling asphalt millings
6251 36 St S	8/14/2024	11:12 AM	City Storm Sewer System	Very Good	None	None
3837 38 St S	Spring		City Storm Sewer System			Not Used
3837 38 St S	Fall		City Storm Sewer System	Very Good	None	No Longer used as Snow Dump
3 Ave N & 45 St N	Spring		City Storm Sewer System	Very Good	dry out clean debris	Unique Winter Season limited snow accumulation
3 Ave N & 45 St N	8/14/2024	10:14 AM	City Storm Sewer System	Good	None	None
5400 63 St S	Spring		County Drain #27	Very Good	None	This site isnt used as often yet. Snow pile is gone.
5400 63 St S	Fall		County Drain #27	Very Good	None	None
450 34 St S	Spring		County Drain, Storm sewer system	Very Good		
450 34 St S	8/13/2024	2:09 PM	County Drain, Storm sewer system	Good	None	The existing snow dump is under construction from cass county jail addition

Land Disturbing Activity

Land disturbing activity abides by Section 3300 of the City of Fargo Standard Specification criteria for stormwater management and erosion control.

SECTION 3300	
CITY OF FARGO SPECIFICATIONS EROSION AND SEDIMENT CONTROL	
PART 1 DESCRIPTION OF WORK	
The work to be completed under this section of the Specifications and the accompanying plans shall include all labor, materials, and equipment necessary to provide for Erosion and Sediment control on City	

Storm Sewer Conveyance Maintenance Operations

Storm sewer maintenance continues perpetually on a rotational or as required basis. The supervisor schedules inspections and directs maintenance work orders. Public works maintenance platform includes inspection (camera), minor repairs, surface sweeping, pipe jetting, mowing, open channel sediment removal and prescribed lift station O & M work.

Roadway Maintenance Operations

Roadway maintenance activities consist of a sweeping program and minor repairs (mill/seal, mud jacking, pothole, etc.)

Standard Operating Procedures, Guides and Policies (Written)

See written procedure examples for maintenance at the end of this section.



Sweeping 2024		
<u>Zone</u>	Tunnage per zone	# of times per year
<u>1</u>	390.5	12
<u>2</u>	237.2	13
<u>3</u>	226.5	14
<u>4</u>	91	13
<u>5</u>	200.5	13
<u>6</u>	590.5	6
<u>7</u>	310.5	10
<u>8</u>	283.98	17
<u>9</u>	193.1	16
<u>10</u>	98.5	16
<u>11</u>	260	8
<u>12</u>	208.5	8
<u>13</u>	132.15	16
<u>14</u>	109.78	16
<u>15</u>	171.41	14
<u>16</u>	111	11
<u>17</u>	162.3	8
<u>1P</u>	208.5	14
<u>2P</u>	215	4
<u>3P</u>	118	4
<u>Total</u>	4320.92	



1. PRODUCT AND COMPANY IDENTIFICATION

Product Identity: Salt Brine with AMP®

Chemical Name: Sodium chloride solution plus proprietary salt brine enhancer.

Recommended use of the chemical and restrictions on use: Road anti-icing and de-icing.

Manufacturer: EnviroTech Services, Inc.
910 54th Avenue Suite 230
Greeley, CO 80634

Telephone: (970) 346-3900

Emergency Phone: CHEMTREC: (800) 424-9300

SDS Date of Preparation: 7/18/2017

2. HAZARDS IDENTIFICATION

GHS Classification:

Physical	Health	Environment
Not Hazardous	Not Hazardous	Not Hazardous

GHS Label Elements:

None Required

3. COMPOSITION/INFORMATION ON INGREDIENTS

Component	CAS No.	Amount
AMP® Proprietary Enhancer	Proprietary	5 - 25%
Sodium Chloride	7791-18-6	15-22%
Magnesium Chloride	7786-30-3	0.5-3.25%
Calcium Chloride	10043-52-4	0.4-2%
Water	7732-18-5	Balance

The exact concentration of is customer dependent.

The exact concentration of the AMP Enhancer is being withheld as a trade secret.

4. FIRST AID MEASURES

Eye: Flush victim's eyes with water while holding the eyelids apart. Get medical attention if irritation occurs and persists.

Skin: Wash skin thoroughly with soap and water. Get medical attention if irritation develops. Remove and launder clothing before reuse.

Ingestion: Do not induce vomiting unless directed to do so by a medical professional. Rinse mouth with water and give one glass of water to drink. Do not give liquids to an unconscious person. Get medical attention if symptoms develop.

Inhalation: If symptoms occur, remove victim to fresh air. If breathing is difficult or irritation persists, get medical attention.

Most important Symptoms: May cause slight eye irritation. Dust may cause slight respiratory tract irritation.

Indication of immediate medical attention/special treatment: Immediate medical attention is not required.

5. FIRE FIGHTING MEASURES

Suitable (and Unsuitable) Extinguishing Media: Use media appropriate for surrounding fire. Cool fire exposed containers and structures with water.

Specific hazards arising from the chemical: Thermal decomposition may yield chloride gas, oxides of carbon and sodium, and other harmful or irritating chemicals.

Special Protective Equipment and Precautions for Fire-Fighting Instructions: Firefighters should wear positive pressure self-contained breathing apparatus and full protective clothing. Aqueous solutions may cause surfaces to be extremely slippery and cause a slip hazard.

6. ACCIDENTAL RELEASE MEASURES

Personal Precautions, Protective Equipment, and Emergency Procedures: Wear appropriate protective clothing as described in Section 8. Wash thoroughly after handling.

Methods and Materials for Containment and Cleaning Up: Sweep up material and collect in a suitable container for disposal. Flush spill area with water. Report releases as required by local, state, and federal authorities.

7. HANDLING AND STORAGE

Precautions for Safe Handling: Avoid contact with the eyes, skin, and clothing. Avoid breathing dusts. Wear protective clothing and equipment as described in Section 8. Wash thoroughly with soap and water after handling. Keep containers closed when not in use.

Conditions for Safe Storage, Including Any Incompatibilities: Store in a cool, dry, well-ventilated area away from incompatible materials.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Exposure Guidelines:

AMP	None Established
Sodium Chloride	None Established

Engineering Controls: Use with adequate general ventilation to minimize exposures.

Respiratory Protection: In operations where exposure levels are excessive, a NIOSH approved respirator with dust cartridges or supplied air respirator appropriate for the form and concentration of the contaminants should be used. Selection and use of respiratory equipment must be in accordance with OSHA 1910.134 and good industrial hygiene practice.

Skin Protection: Wear impervious gloves such as rubber or neoprene if needed to avoid prolonged skin contact.

Eye Protection: Safety glasses recommended.

Other: Long-sleeved clothing and long pants recommended to avoid prolonged skin contact. Suitable washing facilities should be available in the work area.

9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance And Odor: Clear, colorless liquid. No odor.

Physical State: Liquid	Specific Gravity: 1.15-1.25
Vapor Density: Not determined	Initial Boiling Point/Range: Not established
Solubility In Water: >90% at 20°C	Vapor Pressure: Not determined
Relative Density: Not determined	Evaporation Rate: Not determined
Melting/Freezing Point: Not determined	pH: 6-9
VOC Content: Not determined	Octanol/Water Coefficient: Not determined
Solubility (other): Not determined	Decomposition Temperature: Not determined
Viscosity: <100cP at 20°C	Flammability (solid, gas): Not flammable
Flashpoint: Not applicable	Autoignition Temperature: Not determined
Flammable Limits: LEL: Not determined	UEL: Not determined

10. STABILITY AND REACTIVITY

Reactivity: Not normally reactive.

Chemical Stability: Stable under normal storage and handling conditions.

Possibility of Hazardous Reactions: None known.

Conditions to Avoid: None known.

Incompatible Materials: Strong oxidizing agents, concentrated acids, and some metals.

Hazardous Decomposition Products: When heated to decomposition emits carbon and sodium oxides, hydrogen chloride, halogenated compounds, and chlorine gas.

11. TOXICOLOGICAL INFORMATION

HEALTH HAZARDS:

Ingestion: Ingestion may cause slight irritation.

Inhalation: Inhalation may cause slight irritation of the nose, throat, and upper respiratory tract.

Eye: May cause slight irritation.

Skin: May cause slight irritation on prolonged or repeated contact.

Sensitization: This material is not known to cause sensitization.

Chronic: None known.

Carcinogenicity: None of the components is listed as a carcinogen or suspected carcinogen by IARC, NTP, or OSHA.

Germ Cell Mutagenicity: None currently known.

Reproductive Toxicity: None currently known.

Numerical Measures of Toxicity:

No toxicity data available

12. ECOLOGICAL INFORMATION

Ecotoxicity: Product: Fathead minnow NOEC: 3.00 g/L; Ceriodaphnia dubia NOEC: 3.00 g/L; Selanastrum growth NOEC: 0.03 g/L

Persistence and Degradability: Biodegradation is not applicable to inorganic substances.

Bioaccumulative Potential: No data available

Mobility in Soil: No data available

Other Adverse Effects: None known

13. DISPOSAL CONSIDERATIONS

Dispose in accordance with local, state, and federal environmental regulations.

14. TRANSPORT INFORMATION

DOT Hazardous Materials Description:

Proper Shipping Name: Not regulated

UN Number: None

Hazard Class/Packing Group: None

Labels Required: None

15. REGULATORY INFORMATION

CERCLA: This product is not subject to CERCLA release reporting. Many states have more stringent release reporting requirements. Report spills required under federal, state, and local regulations.

SARA Hazard Category (311/312): Refer to Section 2 for OSHA Hazard Classification.

SARA 313: This product contains the following chemicals subject to Annual Release Reporting Requirements under SARA Title III, Section 313 (40 CFR 372): None

EPA TSCA Inventory: All of the ingredients in this product are listed on the EPA TSCA Inventory.

CANADA:

This product has been classified under the CPR and this SDS discloses information elements required by the CPR.

Canadian CEPA: All the components of this product are listed on the Canadian DSL.

Canadian WHMIS Classification: Not classified as dangerous.

16. OTHER INFORMATION

NFPA Rating: Health = 0

Flammability = 0

Instability = 0

HMIS Rating: Health = 1

Flammability = 0

Physical Hazard = 0

SDS Revision History:

5/15/2014: New SDS

4/23/2015: Reviewed, no changes needed

4/12/2016: Reviewed, no changes needed

7/18/2017: Reviewed, added Ecotoxicity information

Disclaimer: *This Safety Data Sheet (SDS) is provided in response to customer requests to address the safe handling of the product. All statements, technical information and recommendations contained herein are the best of our knowledge, reliable and accurate. This SDS is not intended to make any representation as to how the product will perform when used for its intended purpose by a user. In that regards the product is sold "AS IS" and nothing in this SDS should be deemed to be a representation or warranty of any injury, loss, or damage, of any kind or nature, which are sustained by or arise from the use of the product. Nothing in this SDS is intended to be a representation or warranty by the manufacturer of the accuracy, safety, or usefulness for any purpose of any technical information, materials, techniques, or practices.*

The information contained in this Safety Data Sheet is, to the best of our knowledge, accurate and reliable. This information should be provided to all individuals handling this product. Federal, state, and local regulations should be followed when handling this product.



Sewer By-Pass Procedure

Log discovery / notice and direct to appropriate department / staff

Receive work order assignment from dispatcher / supervisor.

Organize performance / safety equipment and deploy to field.

Site Assessment

- Ensure personal safety
- Assess problem / scope of repair

Notify affected departments / staff

- Environmental Health 476-6729
- Public Works 241-1453
- Stormwater 241-1545
- Wastewater Treatment Plant (immediately report any sanitary discharge) 241-1545
- Water Filtration Plant 241-1469

Public Safety

- Take action to assure public safety / traffic control / Public Notice

Perform Work

- Discharge to a like facility if possible
- Setup emergency pumping operation
- Take action to reduce downstream effect
- Document with photos, notes

Post Action

- Log on location map / site & discharge point(s)
- Note suggestions for mitigation

Procedure implementation/revision date

Supervisor

DRAIN CLEANING 2024

<u>Drain Location</u>	<u>Date Cleaned</u>	<u>#of Loads</u>	<u>Total Weight in Ton's</u>
Drain #10	8/15/2024	7	129
Drain #3	8/7/2024	8	134
Drain #40	8/21/2024	8	113
Osgood	8/26/2024	1	3.2
Amber Valley PKWY & 51st St S.	8/22/2024	1	6
Amber Valley PKWY & 55th St S.	8/22/2024	1	6
41st St & 30th Ave S. (SW & NE)	8/22/2024	1	4
23rd Ave & 26th St S.	8/7/2024	1	8
North Oaks	7/30/2024	1	2.75
Drain #27 (Ulteig ENG.)	8/26/2024	6	78
34th St North OF 7th Ave N.	7/31/2024	1	12
Action 7th Ave & 36th St N.	7/23/2024	1	4
Pepsi Drain	7/24/2024	2	7
48th St & 15th Ave S. (Scheel's)	7/30/2024	1	3
Aggregate Dr.	7/23/2024	1	1
Big Top Bingo Pond	7/23/2024	1	1.5
Luther Ford Holding Pond	8/7/2024	1	4
4495 53rd St S. West Side	8/22/2024	1	2
Drain #40 (Fisheye)	8/1/2024	4	53
25th St S. 6700 BLK (East Side Davies)	8/7/2024	1	3
Roers Holding Pond	7/30/2024	1	4
Oxbow Drain	11/25/2024	5	60

TOTAL 43 638.45

small bucket



Mowing Maintenance

Receive work order assignment from supervisor.

Organize performance / safety equipment, load maintenance materials and deploy.

Direct clipping discharges back onto lawn and away from storm water conveyances.

Follow manufacturer's instructions for all chemical use.

Record any required end of task reports.

Procedure date

Supervisor

Stormwater Pollutants

As defined by City of Fargo Code of Ordinances Chapter 37-0102.33 (Stormwater Ordinance)

Group	Examples		
Dumping (A)	<ul style="list-style-type: none"> • Debris • Rocks • Metal 	<ul style="list-style-type: none"> • Grass Clippings • Earth Fill • Tree Branches 	<ul style="list-style-type: none"> • Vegetative Materials • Concrete Chunks • Other Construction Materials
Disposal/Misuse (C)	<u>Chemicals:</u> <ul style="list-style-type: none"> • Fertilizers • Pesticides 	<ul style="list-style-type: none"> • Herbicides 	<u>Petroleum Based Products:</u> <ul style="list-style-type: none"> • Gasoline/Fuels • Solvents • Oil • Paints
Sediment (D)	<u>Migration To:</u> <ul style="list-style-type: none"> • City Streets • Stormwater Conveyance System 	<ul style="list-style-type: none"> • Private Properties 	<ul style="list-style-type: none"> • Failure to Remove Sediment Tracked by Construction Traffic



Outfall Inspection Procedure

Receive work order assignment from supervisor.

Organize performance/safety equipment and deploy to field.

Perform inspections as directed by the supervisor / Outfall Inspection Form:

- Ensure personal safety
- Complete check-off list and/or comment on irregularities
- Maintain trash rack
- Take a minimum of one digital photo
- Observe up/down stream conditions
- Mark and cordon-off all confirmed or suspect pipe separation locations to a safe level
- Maintain wet well (clean, pump, etc.)
- If Illicit Discharge is observed, follow IDDE Procedure
- Submit completed forms to supervisor
- Maintenance required tracking sheet delivered to engineering for repairs

Trace-back (suspect flow, IDDE, aggregate materials, etc.,) as directed by supervisor

- Isolate location via ascending manhole inspection
- Use direct method (smoke, dye, etc.) to detect origination/source
- Contain, stop discharge and notify owner/occupant to attain conformance
- Obtain/restore compliance

Procedure implementation/revision date _____

Supervisor _____



Park & Course Maintenance

Be aware of and minimize water runoff (discharge) into the storm sewer system. Use Best Management Practices (BMPs) to prevent or minimize the identified pollutants (below) from entering the storm sewer system.

Stormwater Pollutants			
<i>As defined by City of Fargo Code of Ordinances Chapter 37-0102.33 (Stormwater Ordinance)</i>			
Group	Examples		
Dumping	<ul style="list-style-type: none">• Debris• Rocks• Metal	<ul style="list-style-type: none">• Grass Clippings• Earth Fill• Tree Branches	<ul style="list-style-type: none">• Vegetative Materials• Concrete Chunks• Other Construction Materials
Disposal/Misuse	<u>Chemicals:</u> <ul style="list-style-type: none">• Fertilizers• Pesticides	<ul style="list-style-type: none">• Herbicides	<u>Petroleum Based Products:</u> <ul style="list-style-type: none">• Gasoline/Fuels• Solvents• Oil• Paints
Sediment	<u>Migration To:</u> <ul style="list-style-type: none">• City Streets• Stormwater Conveyance System	<ul style="list-style-type: none">• Private Properties	<ul style="list-style-type: none">• Failure to Remove Sediment Tracked by Construction Traffic

Receive work order assignment from supervisor.

Read and follow manufacturer's instructions on mixing and application for all fertilizer, herbicide and pesticide maintenance operations. Discuss any concerns with supervisor including post operation cleaning and container disposal.

Organize performance / safety equipment, load maintenance materials and deploy.

Record any required end of task reports.

Procedure date _____

Supervisor _____



Roadway Maintenance Procedure

Receive work order assignment from supervisor.

Organize performance / safety equipment, load maintenance materials and deploy.

Record any required end of task reports.

Procedure date _____

Supervisor _____



Snow Dump Inspections 2024

Location	Date	Time	Stormwater Conveyance	Report of Findings (condition of site)	Action to be taken	Additional Comments
12 Ave/55 St N	Spring		City Storm Sewer System	Good		Unique Winter Season limited snow accumulation
12 Ave/55 St N	8/13/2024	1:30 PM	City Storm Sewer System	Very Good	None	None
6251 36 St S	Spring		City Storm Sewer System	Very Good	dry out clean debris	Site is also stockpiling asphalt millings
6251 36 St S	8/14/2024	11:12 AM	City Storm Sewer System	Very Good	None	None
3837 38 St S	Spring		City Storm Sewer System			Not Used
3837 38 St S	Fall		City Storm Sewer System	Very Good	None	No Longer used as Snow Dump
3 Ave N & 45 St N	Spring		City Storm Sewer System	Very Good	dry out clean debris	Unique Winter Season limited snow accumulation
3 Ave N & 45 St N	8/14/2024	10:14 AM	City Storm Sewer System	Good	None	None
5400 63 St S	Spring		County Drain #27	Very Good	None	This site isnt used as often yet. Snow pile is gone.
5400 63 St S	Fall		County Drain #27	Very Good	None	None
450 34 St S	Spring		County Drain, Storm sewer system	Very Good		
450 34 St S	8/13/2024	2:09 PM	County Drain, Storm sewer system	Good	None	The existing snow dump is under construction from cass county jail addition

FARGO CASS PUBLIC HEALTH - EH SERVICES STATS 2024

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Total YTD
Complaints													
Air	0	0	0	0	0	0	0	0	0	0	0	0	0
Animals/Insects	0	0	0	0	0	1	0	0	0	0	0	0	1
A uatic Facilities	0	0	0	0	0	0	0	0	0	0	0	0	0
Food Complaints	2	0	3	0	0	1	1	2	1	0	1	0	11
garbage	0	0	0	0	0	0	0	0	0	0	0	0	0
unk/Debris	0	0	0	0	0	0	0	0	0	0	0	0	0
Other	2	4	1	7	2	1	2	3	1	2	0	0	25
Public/Private Drinking Water	0	0	0	1	2	0	0	0	0	0	0	0	3
Tall rass/Weeds/Stagnant Water	0	0	0	0	274	1 2	202	119	63	13	1	0	54
Violations Received	4	4	4	7	276	1 5	205	124	65	15	2	0	91
Complaints Received	4	4	4	7	276	1 5	205	123	65	15	2	0	90
Inspections/Consultations													
A uatic Facilities Inspections	5	16	21	31		7	1	4	10	29		4	161
A uatic Facilities Consultations	13	12	33	24	19	22	24	21	2	46	20	12	274
A uatic Facilities Re-check Inspections	0	0	0	0	0	0	0	0	0	0	0	0	0
A uatic Facilities Re-check Consultations	23		13	1	3	2	0	0	0	0	0	0	50
A uatic Facility Testing Inspections	0	0	0	0	0	0	0	0	0	0	0	0	0
A uatic Facility Testing Consultations	100	6	60	7	52	74	0	0	0	0	0	0	379
Body Art Inspections	12	2	4	5	24	6	4	16	5	26	13	9	126
Body Art Consultations	65	33	2	91	121	6	59	59	144	76	52	31	1
Childcare Inspections	0	0	0	0	0	0	0	0	0	0	0	0	0
Childcare Consultations	0	0	0	0	0	0	0	0	0	0	0	0	0
Food/Bar Inspections	102	213	153	160	125	215	212	215	194	225	19	197	2209
Food/Bar Consultations	1 1	110	163	139	104	199	251	253	177	153	117	9	1945
rocery/Meat/Bakeries Inspections	17	59	4	25	1	17		25	15	32	1	23	305
rocery/Meat/Bakeries Consultations	0	0	0	0	0	0	0	0	0	0	0	0	0
Hoarding Inspections	0	0	0	0	0	0	0	0	0	0	0	0	0
Hoarding Consultations	0	0	0	0	0	0	0	0	0	0	0	0	0
Lodging Inspections	5	1	0	2	0	2	4	2	7		7	15	53
Lodging Consultations	7	3	1	1	2	5	1	0	1	1	3	1	26
Miscellaneous Inspections	0	0	0	0	0	1	0	0	0	15	2	0	1
Miscellaneous Consultations	3		17	0	0	0	30	2	50	0	0	0	145
Mobile Home Parks Inspections	0	0	0	6	0	0	0	0	0	0	0	0	6
Mobile Home Parks Consultations	0	0	0	1	0	0	0	0	0	0	0	0	1
Nuisance Complaints Inspections	0	0	0	0	0	3	2	1	0	2	0	0	
Nuisance Complaints Consultations	31	43	39	0	3	0	1	6	0	5	0	0	12
Pet Store Inspections	0	0	0	5	4	5	3	0	2	3	0	0	22
Pet Store Consultations	0	0	0	0	0	0	0	0	0	0	0	0	0
Septic Permits/Evaluations Inspections	4	2	11	14	7	19	24	23	26	42	22	7	201
Septic Permits/Evaluations Consultations	12	51	94	96	65	9	53	109	212	113	43	23	960
Tanning Inspections	0	2		1	1	0	0	0	0	1	0	1	14
Tanning Consultations	0	0	1	0	0	0	0	0	0	0	0	0	1
Total Inspections	145	295	245	249	1 7	275	275	2 6	259	3 3	26	256	3123
Total Consultations	633	52	606	521	52	629	629	634	745	612	431	2 6	67 2
Samples Collected													
Air	0	0	0	0	0	0	0	0	0	0	0	0	0

[illegible]