## Fargo Fire Department



# Community Risk Assessment/Standards of Cover 2025

#### Introduction

As a community grows and changes, a fire department interested in providing the best service must grow and change as well. Adaptations to new and changing problems, technologies, and population needs must be made in addition to maintaining current levels of service throughout the department. As accredited, continually improving fire departments across the world change and adapt with their communities, the accreditation process through the Center for Public Safety Excellence must change and adapt as well. The Fargo Fire Department has been continually accredited since 2010, and is currently working toward the 10<sup>th</sup> edition model for the next accreditation cycle, which will be in 2025.

The accreditation model includes three main documents that must be completed by fire department personnel, validated by a peer assessor team, and upheld by the Commission on Fire Accreditation International:

- A community risk assessment/standards of cover document that describes the community, includes a risk assessment, and reports deployment and response goals and current performance;
- A strategic plan that sets goals for the next 3-5 years;
- A self-assessment manual that includes the performance indicators a department writes that describe the current status, appraises current performance, and puts forth a plan to improve.

The following document is the community risk assessment/standards of cover, commonly referred to as the SOC. The SOC for 2024 was prepared with an updated risk assessment which allowed the response time charts to be updated as well. The remainder of the document was also updated to present the most current information available. The following is the Fargo Fire Department SOC for 2025.

### **Table of Contents**

Introduction	2
Section 1: Documentation of Area Characteristics	10
A Brief Glimpse into Fargo's Early History	10
Geographic Characteristics of the Service Area	10
Topography	11
Climate	11
Climatic Impact on the Fire Department	13
Census, Population, and Area	13
Service Areas	19
Planning Zones	23
Section 2: Programs and Services	24
Staffing, Apparatus, and Stations:	24
Fire Suppression:	26
Emergency Medical Services:	28
Fire Prevention:	28
Public Education/Community Risk Reduction:	29
Hazardous Materials Response:	29
Technical Rescue:	29
Water/Ice Rescue:	30
Drone Operations:	30
Section 3: All-Hazard Risk Assessment and Response Strategies	31
Methodology	31
Target Hazards	36
Non-Fire Risks	42
Transportation:	42
Pipelines:	43
Terrorist Threats:	43
Rivers & Lakes:	43
Hazardous Materials:	45
Natural Disasters:	45
Economic Risks:	47

Description of Loss and Injury	48
Fire Loss:	48
Fire Related Civilian Deaths and Injuries:	48
Firefighter Injuries:	49
Demand for Service	51
Total Calls for Service:	51
Calls for Emergency Medical Services:	51
Calls by Planning Zone:	53
Summary of Risks by Planning Zone	54
Development and Growth within the Planning Zones	74
Section 4: Deployment and Performance	75
Fire Stations Coverage Area	75
Critical Tasks and Effective Response Force	77
Performance Objectives (Benchmark Statements)	83
Response Time Performance	91
Alarm Handling	92
Turnout Time	92
Travel Time	93
Total Response Time	94
Response Time Performance by Incident Type	94
Response Time Performance by Planning Zone	110
Performance Gaps	115
Response Reliability	121
Incident Projection Numbers	123
Section 5: Evaluation of Current Deployment and Performance	125
Evaluation Methodology	125
Evaluation Determinations	125
Alarm Handling	125
Turnout Times	126
Travel Times	126
Section 6: Maintenance and Improvement of Response Capabilities	127
Performance gaps and planning zone issues	130
Section 7: Correlation of CRA-SOC Document to CFAI Accreditation Model	133
Appendix A: Community Risk Reduction Plan	134

Introduction	136
Risk Reduction Plan	136
EMS Incidents	137
Vehicle Crashes	138
Low Risk Fires	139
Hazardous Materials Incidents	140
Moderate Risk Fire	140
High Risk Fire	141
Water/Ice Rescue	142
Technical Rescue	143
Flood	144
Tornado	145

## **Index of Tables and Figures**

Table 1: Average Temperature and Precipitation	11
Figure 1: City of Fargo	12
Table 2: Demographics for the Primary Service Area	15
Figure 2: City of Fargo Population Growth	16
Figure 3: City of Fargo Growth in Square Miles	17
Figure 4: FFD Staffing since 1980	17
Figure 5: Growth Comparison	18
Figure 6: FFD Planning Zones	20
Figure 7: Primary Mutual Aid Response Areas	21
Figure 8: Map showing Grand Forks, Bismarck, & Sioux Falls	22
Table 3: Fixed Asset Location and Staffing	25
Figure 9: Three Axis Risk Categorization Model	31
Table 4: Risk Assessment Category Scores	32
Table 5: Risk Assessment Score and Classification	32
Table 6: Risk Score for Fire Incidents by Type	33
Table 7: Risk Score for EMS Incidents by Type	33
Table 8: Risk Score for Natural Vegetation Fire Incidents by Type	34
Table 9: Risk Score for Technical Rescue Incidents by Type	34
Table 10: Risk Score for HazMat Incidents by Type	35
Table 11: List of Nursing Home/Assisted Living Facility Target Hazards	37
Table 12: List of Senior Living Facilities/Apartment Target Hazards	
Table 13: List of Hospitals and Healthcare Facility Target Hazards	38
Table 14: List of School Target Hazards	39
Table 15: List of Critical Infrastructure Target Hazards	40
Table 16: List of Commercial Target Hazards	41
Table 17: City of Fargo's Largest Employers	47
Figure 10: Total Fire Loss in Dollars	
Figure 11: Civilian Fire Deaths and Injuries 2020-2024	49
Figure 12: Firefighter Injuries, 2020-2024	
Table 18: Total Calls for Service 2020 – 2024	51
Table 19: Calls for Medical Dispatch Code A-E 2020 - 2024	52
Table 20: 2024 Calls by Planning Zone	
Table 21: PZ 1 Calls for Service	54
Table 22: PZ 2 Calls for Service	56
Table 23: PZ 3 Calls for Service	58
Table 24: PZ 4 Calls for Service	60
Table 25: PZ 5 Calls for Service	62
Table 26: PZ 6 Calls for Service	
Table 27: PZ 7 Calls for Service	
Table 28: PZ 8 Calls for Service	
Table 29: PZ 9 Calls for Service	
Table 30: PZ 10 Calls for Service	72
Table 31: Alarm Handling History	
Table 32: Turnout Time History	93

Table 33: Travel Time History	94
Table 34: Total Response Time History	94
Table 35: PZ 1 Response Time Performance	
Table 36: PZ 2 Response Time Performance	111
Table 37: PZ 3 Response Time Performance	111
Table 38: PZ 4 Response Time Performance	112
Table 39: PZ 5 Response Time Performance	
Table 40: PZ 6 Response Time Performance	113
Table 41: PZ 7 Response Time Performance	113
Table 42: PZ 8 Response Time Performance	114
Table 43: PZ 9 Response Time Performance	114
Table 44: PZ 10 Response Time Performance	115
Table 45: City Wide Performance Gaps	
Table 46: Unit Reliability	
Table 47: EMS Call Handling Guide	

#### **Executive Summary**

This document represents the community risk assessment/standards of cover (SOC) for the Fargo Fire Department (FFD). It serves the primary service area, which comprises the corporate city limits of Fargo, North Dakota. The FFD was first accredited through the Commission on Fire Accreditation International (CFAI) in August 2010. The information provided herein is the direct result of the continuing self-assessment and accreditation process for the FFD.

A risk assessment for the community has been completed using information provided by the U.S. Census Bureau, geographic information system (GIS) data provided by the City of Fargo Information Services (IS) Department, and data gathered by the FFD through its own permitting, code enforcement processes, and records management system. This information consists of population densities, employment statistics, available infrastructure, building types, fixed fire suppression systems, and the availability and response capabilities of fire department assets. The assembled data is then used to classify incidents into low, moderate, and high-risk categories based on their potential impact on the City of Fargo's ability to operate and continue to provide necessary services to the community. The geographic area of the city is then divided into 10 planning zones to further assess risk on a smaller scale and assist in the current and future placement of fire department assets. Target hazards are also included to allow for the preplanning of all properties that may have an elevated level of risk.

Response data for the FFD is reported by planning zone, incident type, and on a department wide basis. This information is used to assess the current and trailing five year baseline performance of fire department incidents. The FFD has chosen to use the standards set by the National Fire Protection Association (NFPA) 1710-Standard for the Organization and Deployment of Fire Suppression Operations, Emergency Medical Operations, and Special Operations to the Public by Career Fire Departments as a guideline for assessing performance and setting benchmark goals and objectives.

An assessment of current performance is included for the purposes of self-examination and to ensure that the needs and expectations of the community are being met. Future plans and methodologies are included, where necessary, to both identify the processes set forth by the department to correct deficiencies and maintain practices which have proven successful in providing the level of service necessary to meet the department's mission: *to reduce the rate of* 

emergencies through public education and code enforcement; protect lives and property from fire and other emergencies; and respond to emergencies in a professional and courteous manner.

The purpose of this document is to serve as the FFD's guide in directing future strategies, the current deployment of assets and providing the appropriate levels of training and public education necessary to provide a high-level response service for fire suppression, emergency medical services, hazardous materials, technical rescue, water and ice rescue, hazard prevention, public education, and code enforcement. It is respectfully submitted by the FFD for review by the citizens it serves and their duly elected representatives.

#### **Section 1: Documentation of Area Characteristics**

#### A Brief Glimpse into Fargo's Early History

Fargo's founding dates back to 1871, when the first settlers staked out homestead claims at the point where the Northern Pacific Railroad would cross the Red River. Railroads played a major role in the development of Fargo. In fact, the city was named for William G. Fargo, a director of the Northern Pacific Railroad, and co-founder of Wells Fargo Express Company. Initially, Fargo was a rough and rowdy frontier town with its fair share of bordellos and saloons.

In 1876, Fargo's population was only 600, but the city grew rapidly as more and more settlers arrived, drawn by the promise of cheap, fertile farmland in the Red River Valley. By 1892, Fargo had grown to a city of more than 8,000 inhabitants; the tents and shanties of earlier days had been replaced by mainly wood-frame buildings

On June 7, 1893, disaster struck the growing city. A fire began on Front Street (now called Main Avenue) and fanned by strong winds from the south, consumed most of the downtown area. By the time it was over, more than 31 blocks were reduced to piles of rubble. Although the fire must have been a stunning blow to the city, Fargo's citizens resolved to rebuild; in less than a year, 246 new buildings had been constructed. The new structures were designed by many fine regional architects; the post-fire city became more attractive and substantial, and many of these buildings survive today.

#### **Geographic Characteristics of the Service Area**

Fargo is the largest city in the state of North Dakota and the county seat of Cass County. The U.S. Census Bureau estimated the 2024 population of Fargo to be 135,588 residents and the 218<sup>th</sup> largest city in the United States. The city limits are the boundaries for the FFD primary response area and encompass an area of 51.6 square miles. According to the Greater FM Development Corporation, the estimated metropolitan population for 2023 (most recent estimate) is 262,620. The metropolitan population includes Fargo along with the neighboring cities of West Fargo and Horace in North Dakota and Moorhead and Dilworth across the Red River in Minnesota. Together they form the Fargo-Moorhead, ND-MN Metropolitan Statistical Area. The City of Fargo is the crossroads and economic center of a large portion of eastern North Dakota and a portion of northwestern Minnesota. Fargo is a retail, manufacturing, healthcare, and

educational hub for the region. Fargo is home to North Dakota State University, with a 2024 fall enrollment of 11,952 students. A map of the City of Fargo can be found below.

#### **Topography**

Fargo sits on the western bank of the Red River of the North in a flat region known as the Red River Valley. Sediments deposited from once Glacial Lake Agassiz made the land around Fargo some of the richest in the world for agricultural uses. The elevation in and around Fargo changes only a few feet throughout the entire city. Due to its location on the plains, wind is a near constant in Fargo, with an average wind speed throughout the year of over 12 mph.

#### Climate

Due to its location in the Great Plains and its distance from both mountains and oceans, Fargo has an extreme continental climate. Table 1 shows the annual average temperature and precipitation for the area.

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Avg high °F	18	24	36	56	69	77	82	81	71	56	37	22
Avg low temperature °F	0	6	19	33	45	55	60	57	47	35	20	6
Precip inches	0.70	0.64	1.30	1.36	2.81	3.90	2.79	2.56	2.57	2.15	1.00	0.83

**Table 1: Average Temperature and Precipitation** 

While the table above illustrates the averages for temperature and precipitation, it does not represent the extremes. During winter, primarily the months of January and February, it is common to have temperatures from -10°F to -30°F with a record low temperature of -39°F on February 1, 1996. In summer months, primarily July and August, temperatures are often above 90°F with a record high of 106°F on July 6, 1988. Because of the extremely flat terrain, large amounts of precipitation have a significant impact. Snowfall in Fargo averages 49.3 inches per year. However, in the winter of 1996-1997, Fargo received 117 inches of snow. Hot, humid summers can produce severe thunderstorms delivering several inches of rain in a short amount of time.

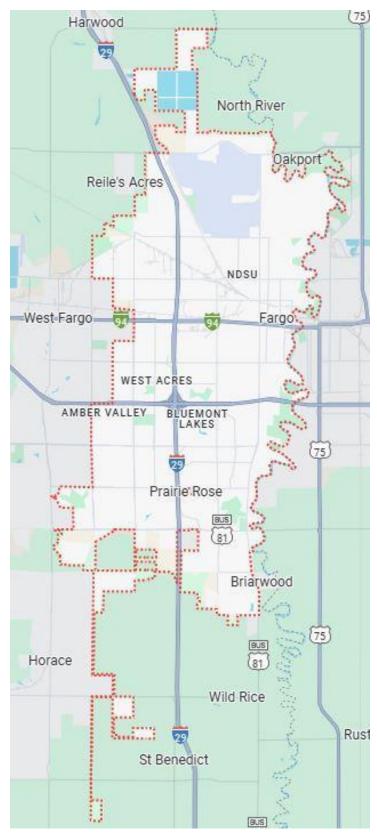


Figure 1: City of Fargo

#### **Climatic Impact on the Fire Department**

While the FFD must be prepared for the wide variances in temperature, the predominant climatic impact on the FFD service delivery is associated with winter conditions. Precautions such as annual checks of all fire hydrants are taken which helps to identify any hydrants that need service. For any hydrants in need of repair, the deficiencies are annually corrected. This includes pumping out hydrant barrels, which have been found not to drain, prior to freezing temperatures arriving. The Fargo Water Department also adds an antifreeze solution to these hydrants to ensure they remain available for use through the winter. These procedures ensure frozen hydrants are not encountered during an emergency. Apparatus are purchased with enclosed and heated pump compartments to safeguard against pump freeze-up. Fire ground operations are adapted to cope with the frigid temperatures. Hose lines are kept flowing with water to avoid freeze up and ice grippers are distributed for firefighting boots to prevent slips and falls. During periods of extended, extreme cold weather, alternative vehicles such as pickups are used to respond to incidents such as EMS and fire alarms. The effects of the winter conditions upon the FFD service delivery are to be expected in North Dakota. Since the formation of the department in 1875, severe changes in weather conditions have been planned for, and adapted to successfully. An increase in response time associated with winter driving conditions is typically the most significant consequence.

#### Census, Population, and Area

The information in Table 2 below represents the most recent demographic data available from the U.S. Census Bureau for the City of Fargo. While the information indicates that white is the predominant race within the city, not all ethnic backgrounds are represented; refugees are not included. From 1990 to 2003, almost 5,000 refugees from 40 countries resettled in Fargo with one in three coming from Bosnia. During the 1990's, Fargo's immigrant population more than doubled accounting for 12 percent of the city's total population growth. As the city grows, Fargo's diverse populations continue to grow as well.

Population	
Population estimates, July 1, 2024, (V2024)	NA
Population estimates, July 1, 2023, (V2023)	133,188
Population estimates base, April 1, 2020, (V2024)	NA
Population estimates base, April 1, 2020, (V2023)	125,952
Population, percent change - April 1, 2020 (estimates base) to July 1, 2024, (V2024)	NA
Population, percent change - April 1, 2020 (estimates base) to July 1, 2023, (V2023)	5.7%
Population, Census, April 1, 2020	125,990
Population, Census, April 1, 2010	105,549
Age and Sex	
Persons under 5 years, percent	6.0%
Persons under 18 years, percent	19.6%
Persons 65 years and over, percent	13.6%
Female persons, percent	49.5%
Race and Hispanic Origin	
White alone, percent	80.8%
Black alone, percent (a)(a)	8.3%
American Indian and Alaska Native alone, percent (a)(a)	1.0%
Asian alone, percent (a)(a)	3.9%
Native Hawaiian and Other Pacific Islander alone, percent (a)(a)	0.0%
Two or More Races, percent	5.0%
Hispanic or Latino, percent (b)(b)	3.7%
White alone, not Hispanic or Latino, percent	79.7%

Population Characteristics	
Veterans, 2019-2023	6,313
Foreign-born persons, percent, 2019-2023	9.7%
Housing	
Housing Units, July 1, 2023, (V2023)	X
Owner-occupied housing unit rate, 2019-2023	44.1%
Median value of owner-occupied housing units, 2019-2023	\$269,800
Median selected monthly owner costs - with a mortgage, 2019-2023	\$1,731
Median selected monthly owner costs -without a mortgage, 2019-2023	\$642
Median gross rent, 2019-2023	\$916

**Table 2: Demographics for the Primary Service Area** 

According to the U.S. Census bureau, the population of the City of Fargo has risen from 61,383 in 1980 to an estimated 135,588 in 2024. See

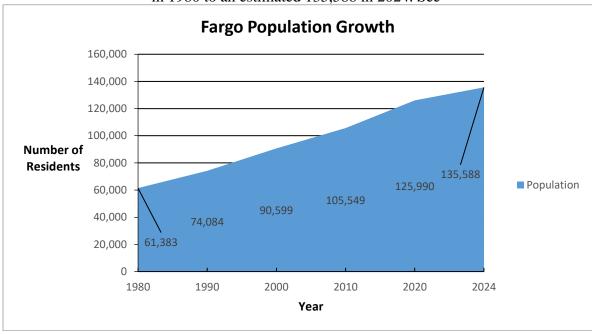


Figure 2.

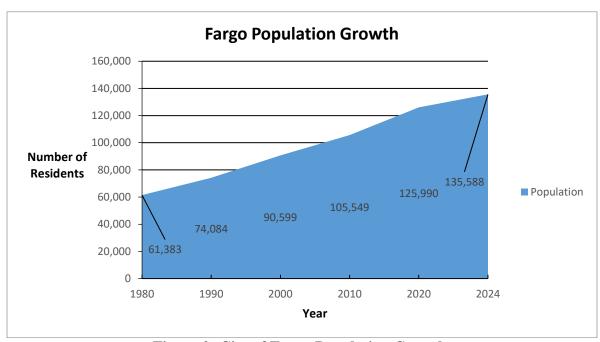


Figure 2: City of Fargo Population Growth

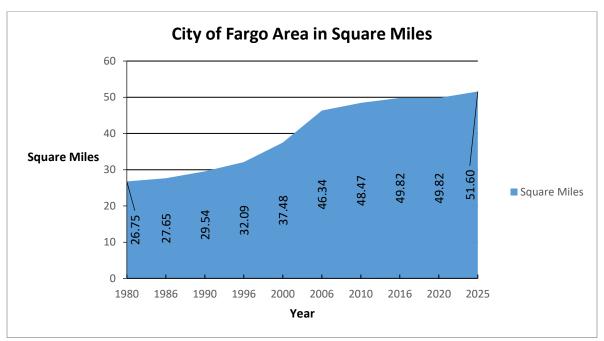


Figure 3: City of Fargo Growth in Square Miles

In 1980, fire suppression, fire prevention, and support divisions totaled 85 personnel. Total staffing of the fire department in 2025 is 141 personnel.



Figure 4: FFD Staffing since 1980

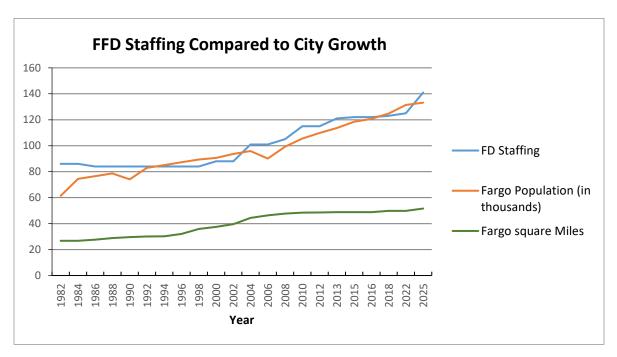


Figure 5 shows the comparison for growth of the city in area, population, and FFD staffing.

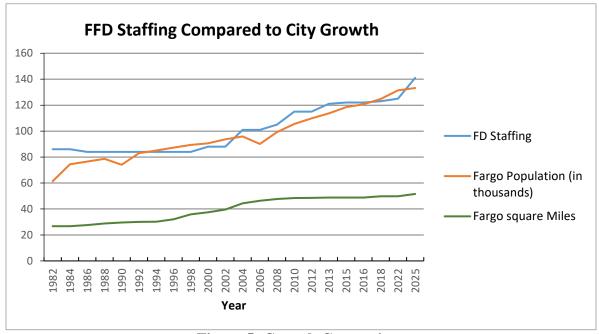


Figure 5: Growth Comparison

The above graph represents the relative increase in staffing, population, and square miles over time. This graph makes it apparent that the department has been more successful at meeting the needs of the community since the presentation of the 2001 strategic plan to the city commission.

#### **Service Areas**

The primary service area of the FFD as established by Chapter 9 of the City of Fargo Municipal Code are the corporate limits of the City of Fargo. These corporate limits are further divided into 10 planning zones (see Figure 6 below). Although these planning zones have fixed geographical boundaries and are used to determine the location of fire stations and staged apparatus; the department uses automatic vehicle location (AVL) dispatching to determine the nearest available resources. The first due apparatus and appropriate effective response force (ERF) apparatus are assigned accordingly at the time of call.

The FFD has secondary service areas established via memorandums of understanding (MOU) with surrounding communities to provide emergency services, upon request, in varying capacities. These secondary service locations include the geographical area encompassing the southeast portion of the State of North Dakota, municipalities located in northeastern North Dakota, central North Dakota, southeast South Dakota and the corporate city limits of Moorhead, MN (See Figure 7 & 8 below).

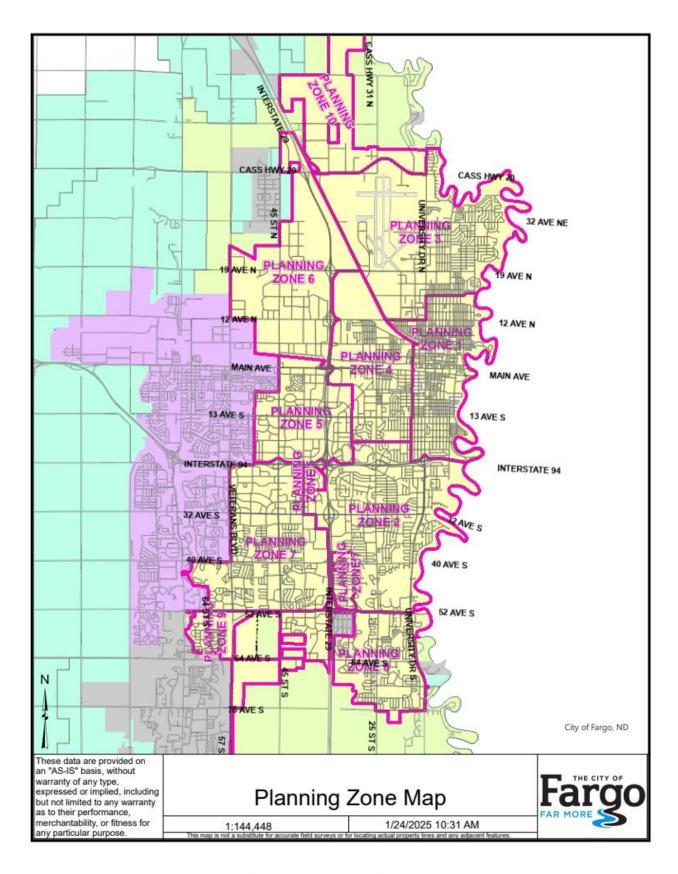


Figure 6: FFD Planning Zones

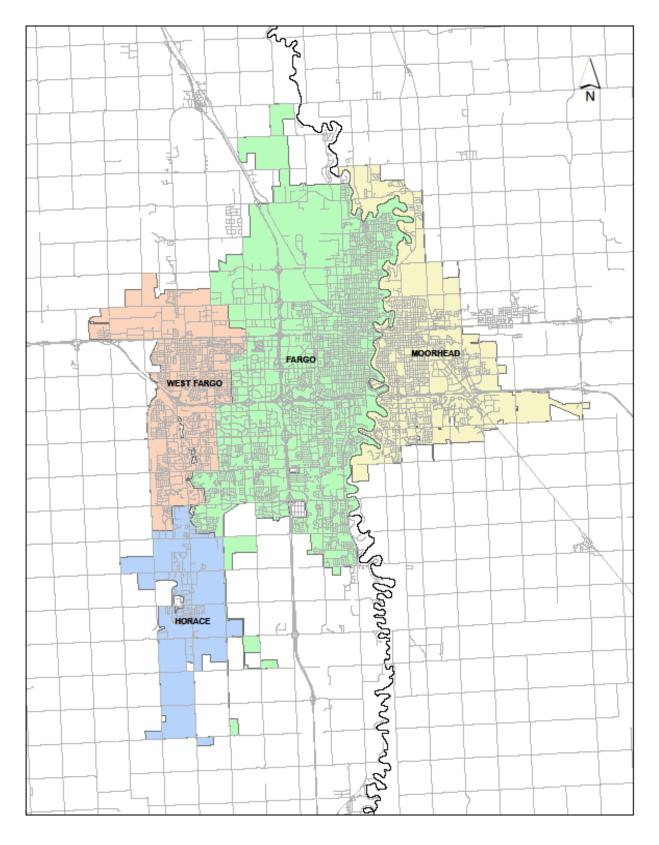


Figure 7: Primary Mutual Aid Response Areas

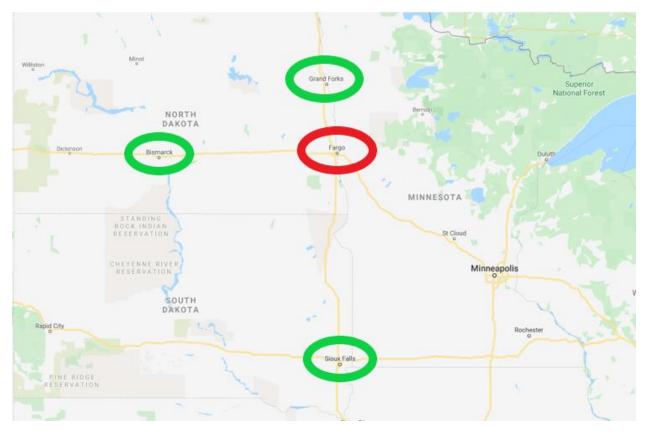


Figure 8: Map showing Grand Forks, Bismarck, & Sioux Falls

#### MOU's for all-hazard response

- 1. Moorhead, MN Fire Department
- 2. Cass County ND Fire Rescue
- 3. Grand Forks, ND Fire Department
- 4. Bismarck, ND Fire Department
- MOU for Emergency Medical Services
  - 1. Sanford Ambulance

#### MOU for aircraft emergencies

1. Hector International Airport

#### MOU for Technical Rescue Services

1. State of North Dakota

- 5. Horace Rural Fire Protection District
- 6. Sioux Falls, SD Fire Department
- 7. West Fargo, ND Fire Department

#### MOU for Hazardous Materials Services

- 1. State of North Dakota
- 2. BNSF Foam Trailer

#### **Planning Zones**

The FFD uses its traditional first due engine company response zones as its primary planning zones (PZ). (Figure 6 is a map depicting these ten zones) These zones are used to determine the location of fixed assets and apparatus placement to facilitate the most efficient travel times and distances within the available infrastructure. Prior to third quarter 2024, FFD assets were located in planning zones 1 through 7, with planning zones 8, 9, and 10 having been established for planning purposes to support future growth and expansion of the city. Of those three, PZ 8 is currently experiencing the largest amount of growth and economic activity with correspondingly increasing demands for services. In response to that need, a new fire station that would cover PZ 8 was approved and funded by the city commission, and construction started on the project in June of 2023. Fire Station 8 opened at the end of the third quarter of 2024, and is located at 6617 33rd St S. With the opening of Station 8, PZ 2, PZ 7, PZ 8 and PZ 9 were modified to better align with the physical location and response area of Station 8. PZ 9 and PZ 10 remain mostly undeveloped and are more rural in nature. There is no current time frame on building fire stations in those areas. Emergency services to these zones are currently delivered from FFD apparatus located in PZ 7 & 8 and PZ 3 respectively.

These 10 planning zones have been used for many years to determine the first due apparatus and the ERF for any given area within the primary service area. The FFD currently uses AVL software to determine first due apparatus and the ERF for primary service areas. Due to the number of years that the static zones have been used, they have become institutional knowledge within the organization. For this reason, coupled with the fact that the historical data sets were developed from within these zones, response data in this SOC has been analyzed with data from the previous planning zones. Going forward, future SOCs will have response data analyzed based on the updated planning zones. The FFD has chosen these static areas as the planning zones for the organization. Due to the fact that PZ 9 and PZ 10 do not currently house any fixed FFD assets, quadrant data for those areas are collated into the response data for Station 7 and Station 3. At such a time when permanent fire stations have been placed into these planning zones, quadrants will be realigned with the appropriate first due apparatus and tracked accordingly.

#### **Section 2: Programs and Services**

The FFD is an "all-hazards" prevention and response service. Prevention and community risk reduction efforts are accomplished through public education, code enforcement, and advocacy. Response services provided by the FFD include various aspects of emergency response including: fire suppression, emergency medical services (non-transporting), wildland firefighting, hazardous materials, technical rescue, water and ice rescue, and drone operations.

#### **Staffing, Apparatus, and Stations:**

Current staffing for the FFD is 141 personnel, including; 123 in fire suppression, 7 in fire prevention, 4 in training, with the remainder being administrative positions. The suppression division is further divided into three rotating 24 hour shifts of 41 personnel each to provide continuous protection to the City of Fargo. The current minimum daily staffing per shift is 32 with eight stations in operation. Current first line apparatus and staffing include:

- Eight engine companies with a minimum of three personnel each, one of which is a rescue pumper with additional equipment and air filling capability. These units are equipped with 1250 gpm pumps and carry between 500-1000 gallons of water.
- Two aerial trucks: Truck 1 is equipped with a 103' aerial ladder with a nozzle, a 500-gallon water tank, and a 1500 gpm pump and equipment to deal with auto extrication and other rescues. Truck 2 is equipped with a 100' ladder with a platform, 250-gallon water tank, 1250 gpm pump and equipment to deal with auto extrication and other rescues.
- Two command units, each staffed by a battalion chief.
- One heavy rescue trailer with tow vehicle. When needed, this unit is cross-staffed with on duty personnel.
- One hazardous materials vehicle. When needed, this vehicle is cross-staffed with on duty personnel.
- Two zodiac inflatable rescue boats and one aluminum, flat bottom boat with recovery and ice rescue equipment. The aluminum boat has a jet powered outboard, side scanning sonar and 360-degree sonar.
- One fire investigation vehicle staffed by an on-call deputy fire marshal.
- Two grass fire units, each with a 200-gallon water tank, 10-gallon foam tank, 20 HP pump, and a 150-foot 3/4" booster reel. Cross-staffed with on duty personnel.

#### Reserve apparatus includes:

- Three engines.
- One 103' aerial truck with platform, 250-gallon water tank, 1250 gpm pump.
- One utility light and air vehicle.

Table 3 shows the location of fixed assets along with assigned apparatus, equipment and staffing throughout the primary service area.

Fixed Asset	Location	P Z	Resources	Staffing
Station 1	637 NP Ave	1	Engine Co. 801	≥3
			Battalion 1 (Command Officer)	1
			One Aluminum Rescue Boat	cross staffed
			One Fire Investigation Vehicle	1
			Administrative Staff	6
			Fire Prevention Bureau	7
Station 2	3020 25th St S	2	Engine Co. 802	≥ 3
Station 3	1101 25th Ave N	3	Engine Co. 803	≥ 3
			One Zodiac	cross staffed
Station 4	2701 1st Ave N	4	Engine Co. 804 (Rescue Pumper)	≥3
			Truck 1	3
			UAS (Drone) Equipment	cross staffed
			Type VI Brush Patrol	cross staffed
Station 5	930 40th St S	5	Engine Co. 805	<u>≥</u> 3
			Light & Air Vehicle 855	cross staffed
Station 6	4630 15 Ave N	6	Engine Co. 806	≥3
			Regional TRT Trailer and Tow Vehicle	cross staffed
			Salvage Trailer	cross staffed
			City of Fargo Emergency Manager	1
			Heavy Rescue Trailer w/ Tow Vehicle (truck 4)	cross staffed
Station 7	3957 Village Ln.	7	Engine Co. 807	≥3
			Battalion 2 (Command Officer)	1
			Truck 2	3
			Regional Hazmat Response Unit	cross staffed
			Type VI Brush Patrol	cross staffed
Station 8	6617 33 <sup>rd</sup> St S	8	Engine Co. 808	<u>≥</u> 3
			One Zodiac	cross staffed
Training Center	501 23 <sup>rd</sup> St N	4	Training Captains Offices	4
Shop	402 23 <sup>rd</sup> St N #4114	4	Three Reserve Engines	0
	m 11		One Reserve Aerial	0

**Table 3: Fixed Asset Location and Staffing** 

#### **Fire Suppression:**

The FFD uses a tiered approach to fire suppression based on the type, volume, and severity of the incident. Smaller fires such as those involving passenger vehicles, small out buildings, grass fires or refuse are mitigated with a single engine response. Each engine is fully equipped and staffed to manage these types of incidents without additional resources or assistance.

Larger incidents and/or structure fires are assigned a first alarm assignment. This assignment has shown through experience to be sufficient to manage the majority of structure fires in the FFD's primary service area. In the event that an incident necessitates a larger response, such as in a large commercial building, multi-family dwelling, or high-rise, the incident commander has the authority to initiate multiple alarms or call for specific resources as deemed necessary. The alarm assignments follow and are found in standard operating guideline (SOG) 214:

#### 1<sup>st</sup> Alarm:

- 4 engine companies
- 1 truck company
- 1 battalion chief
- 1 Advanced Life Support (ALS) ambulance unit (Sanford Ambulance)

#### $2^{nd}$ Alarm $-1^{st}$ alarm assignment plus:

- 1 additional FFD engine company
- Notify the other on duty battalion chief
- Notify the chief & division chiefs
- 1 additional ALS ambulance unit (Sanford Ambulance)
- Salvation Army and Red Cross
- Fargo Police Department shift supervisor
- COF Communications notification
- UAS Unit

#### $3^{rd}$ Alarm $-1^{st}$ and $2^{nd}$ alarm plus:

- 1 additional FFD engine company
- 1 additional FFD truck company
- 1 mutual aid engine company from Moorhead or West Fargo depending on location.
- Call back the oncoming shift
- Notify and request off duty battalion chiefs and training division personnel to respond

#### 4<sup>th</sup> Alarm – 1<sup>st</sup>, 2<sup>nd</sup>, and 3<sup>rd</sup> alarm plus:

- Remaining uncommitted FFD front line apparatus
- Call back all remaining fire suppression and training division personnel

#### 5<sup>th</sup> Alarm – 1<sup>st</sup>, 2<sup>nd</sup>, 3<sup>rd</sup> and 4<sup>th</sup> alarm plus:

• Request specific mutual aid resources from West Fargo or Moorhead.

#### Structure fires

The FFD responds to approximately 10 structure fires per month that includes any fire that is within a building or involving the structure itself. These fires include events such as cooking fires, room and contents, or fully involved structures. Structure fires require personnel to utilize a number of strategies and tactics to accomplish incident objectives. Knowledge, skills, and abilities utilized always includes use of the incident command structure, and might include search and rescue, water supply, hose stream application, ventilation, and communications. There is not a typical time of day, week, or year that fires take place in Fargo. Even though the winter months bring about increased use of heating appliances, the correlation between the number of structure fires and time of year is not consistent. The two leading causes of fires in Fargo include cooking and improper disposal of smoking materials. All fires in Fargo are investigated at either the company officer, shift investigator, or deputy fire marshal level.

#### Other fires

The FFD responds to an additional 10-15 fires per month that are not in or involving a structure. These fires include vehicle fires, rubbish fires, and other outside fires that do not fall within the vegetation fires category below. These fires are generally handled by a single company, but occasionally do require a larger response. Although these incidents may seem "easier" or "more routine" than structure fires, there are additional hazards present that make any fire scene hazardous, including traffic, unknown materials present, or flammable liquids.

#### Wildland fires

The FFD does not respond to a significant number of wildland fires; therefore, the property loss and time committed to such fires is low. Wildland fires do not pose a large risk in Fargo. However, the potential for wildland fires turning into a wildland urban interface (WUI) threat exists under the proper conditions, so planning is done to improve the department's preparedness.

The City of Fargo is threatened most by wildland fires during the dry months when there is no snow cover and the vegetation has not become green after winter or has cured as fall approaches, which is typically April and May and then again in July through September. However, the city has experienced wildland fires every month, except for February in the last five years. The topography in Fargo does not contribute to wildland fire spread because any elevation changes are so minor that it does not contribute to preheating or slope aspect heating. Strong winds spreading fire and fire embers would be the main threat of wildland fire spread in the WUI. Fargo is most susceptible to a WUI fire during extreme weather events in the spring and fall.

#### **Emergency Medical Services:**

All fire suppression personnel are trained and certified to the level of emergency medical technician (EMT) with additional advanced skills. Fire suppression personnel receive advanced skill training in airway management (use of advanced airways) and pharmacology (for the treatment of heart and endocrine issues as well as opioid overdose). Each front line apparatus is fully equipped and staffed to respond to medical emergencies at the EMT level. Each company is equipped and trained to perform auto extrication with complex extrication equipment placed on Truck 1, Truck 2, and 804. The FFD does not transport patients or provide ALS services as both of these are provided by Sanford Ambulance in the region.

All front-line fire apparatus carry three sets of ballistic gear including a vest with rifle rated plates and helmets. Each ballistic vest includes a med pack with items including tourniquets, trauma dressings, and marking materials. This PPE is used during incidents that involve weapons or violence where the scene may not be 100% safe or secured by law enforcement, but medical needs are present that can be addressed by FFD personnel.

#### **Fire Prevention:**

The City of Fargo has adopted the International Fire Code (IFC) for the purposes of maintaining structures and permitting. The current version of the IFC 2021 code has been adopted by the COF and was effective as of the end of 2022. The 2024 version of the IFC is planned to be adopted in later 2025. The fire prevention bureau (FPB) is staffed with six deputy fire marshals, one battalion chief/assistant fire marshal, and the fire marshal who is a division chief and oversees the FPB. These deputy fire marshals are certified through the International Code

Council and the International Association of Arson Investigators. The FPB manages citywide permit inspections, plan reviews, and oversight on new construction. Fire suppression crews also conduct company level fire prevention inspections and are responsible for maintaining code enforcement throughout the remainder of the city. Throughout the primary service area, the FFD inspects each commercial business every year and apartment buildings every other year.

#### **Public Education/Community Risk Reduction:**

The FPB conducts annual public education events through Fargo public and private schools with the department's "Learn Not to Burn" program. Students are visited by the FPB each fall for fire and hazard prevention education. Follow up visits are conducted each spring by fire suppression personnel to reinforce an annual message and assess the knowledge retention of students. The FFD training division conducts similar events throughout the year at local businesses and non-profit organizations. The FFD maintains a public access defibrillator program to improve access to automated external defibrillators (AED) throughout the community. The department occasionally provides instruction in cardiopulmonary resuscitation (CPR) and AED use to the community. The FFD maintains a written community risk reduction plan to identify various common or significant risks to the community (See Appendix A). Each area of emphasis is outlined with a stated goal, an assessment of required resources and actions, and includes a method of evaluating its effectiveness.

#### **Hazardous Materials Response:**

The FFD maintains a 30-member hazardous material (Hazmat) response team that trains to the technician level to respond to incidents involving hazardous materials. This team also responds into the greater southeast portion of North Dakota through an MOU with the State of ND. Equipment is placed and maintained at Fire Stations 5 and 7 for the purposes of responding to these events.

#### **Technical Rescue:**

The FFD maintains a 30-member technical rescue team (TRT) that is trained to respond to incidents involving structural collapse, trench rescue, confined space, and high angle rescue. This team also responds into the greater southeast portion of North Dakota through an MOU with the state of North Dakota. Equipment is stored and maintained at Fire Stations 4 and 6 for the purposes of responding to these events.

#### **Water/Ice Rescue:**

The FFD maintains a water rescue team staffed with personnel from Fire Stations 1 and 8. All fire suppression personnel receive training to assist with surface water and ice rescue activities. Fire stations located in planning zones that have historically seen the highest rate of water rescue incidents (Stations 1 and 8) are equipped with rescue boats and safety equipment sufficient to perform extended operations. Each FFD apparatus is equipped with sufficient water rescue equipment to perform an individual rescue with single engine company resources and staffing.

#### **Drone Operations:**

The FFD participates in the Red River Valley Unmanned Aircraft Systems (RRVUAS) consortium along with four other local fire and law enforcement agencies. The FFD provides nine pilots which includes three personnel from each shift at Station 4. This allows for 24/7 coverage by on-duty pilots to respond to calls for service. All FFD personnel receive training to act as a visual observer to assist the pilot during operations. The RRVUAS has several drones that are housed at Fire Station 4. The drones have video and thermal imaging capabilities.

#### Section 3: All-Hazard Risk Assessment and Response Strategies

#### Methodology

The FFD uses a risk assessment methodology that:

- Ensures department personnel and community partners understand the process
- Serves a valid purpose
- Allows for the updating of information in a timely manner
- Provides a process that allows collected data to be analyzed and easily understood by all department personnel.

Incident type and infrastructure type are both used to assess risk, although they are measured and examined differently.

Risks are categorized by incident type using the Three-Axis Risk Categorization Process shown in the figure below that was adopted from the Quality Improvement for the Fire and Emergency Services (QIFES) manual published by the Center for Public Safety Excellence (CPSE). The three areas used to determine the classification of risk include probability, consequence, and impact. These three areas each receive a numerical score that is then entered into a formula which provides a risk score. For ease of comparison, these scores are grouped as low, moderate, or high risk classifications.

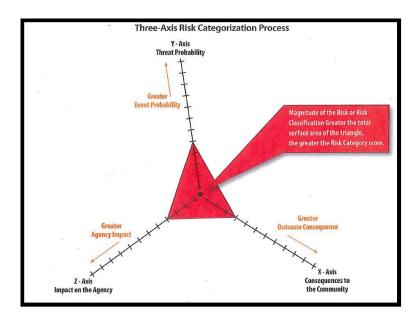


Figure 9: Three Axis Risk Categorization Model

The Three-Axis Risk model uses a score for each area, which, when entered into an equation that is a modified Heron's Formula, provides a risk score. By entering the risk data into this formula, "an objective mathematical calculation of the triangle surface area creates a risk category score based upon pre-qualified jurisdictional parameters set for risk category ranges" (CPSE, pp. 26-7).

- Probability scores are derived from past department responses.
- Consequence scores are derived from the effect/severity on individuals and community partners.
- Impact scores are derived from the effect on department resources.

The tables below list the scores used for each area of risk.

Probability
2 = Rarely/Annually/Quarterly
4 = Monthly
6 = Weekly
8 = Daily
Consequence
2 = Individual/Confined to object
4 = Multiple people/Confined to room, floor
6 = Multiple people/Confined to building
8 = City/Community/Beyond building of origin
Impact
2 = 1 apparatus
4 = 2-3 apparatus
6 = 4-5 apparatus
8 = 6 or more apparatus

**Table 4: Risk Assessment Category Scores** 

Risk Score	Risk Classification
0-20	Low
21-30	Moderate
30 +	High

Table 5: Risk Assessment Score and Classification

Incident types were grouped into five main categories including fire, emergency medical services (EMS), natural vegetation fire, technical rescue (TRT), and hazardous materials (HazMat).

Fire	Probability	Consequence	Impact	Risk Score	Risk Classification
111 Structure fire					
Confined to object of origin	6	2	6	28.14249	Moderate
Confined to room of origin	4	4	6	26.53300	Moderate
Confined to floor of origin	2	4	8	25.92296	Moderate
Confined to building of origin	4	6	8	44.18144	High
Beyond building of origin	2	8	8	48.00000	High
112 Fire in structure, not bldg	2	2	4	8.48528	Low
113 Cooking fire	4	4	6	26.53300	Moderate
118 Trash/rubbish in structure	2	2	6	12.32883	Low
131 Vehicle fire	6	2	2	12.32883	Low
132 Road freight	2	2	4	8.48528	Low
138 Off road vehicle	2	2	2	4.89898	Low
151 Outside rubbish	2	2	2	4.89898	Low
154 Dumpster fire	4	2	2	8.48528	Low
162 Outside equipment	2	2	2	4.89898	Low
71x/73x/74x Alarm	8	2	2	16.24808	Low

**Table 6: Risk Score for Fire Incidents by Type** 

					Risk
EMS	Probability	Consequence	Impact	Risk Score	Classification
				16.2480768	
311 Medical Assist	8	2	2	1	Low
				16.2480768	
321 EMS call	8	2	2	1	Low
				26.5329983	
322 MVA w/injuries	6	4	4	2	Moderate
				26.5329983	
323 MV/Pedestrian accident	4	6	4	2	Moderate
				19.7989898	
324 MVA w/no injuries	6	2	4	7	Low
		·		36.7695526	
Mass-casualty incident	2	6	8	2	High

**Table 7: Risk Score for EMS Incidents by Type** 

					Risk
Natural Vegetation fire	Probability	Consequence	Impact	Risk Score	Classification
140 Natural vegetation fire, other	2	2	2	4.89898	Low
141 Forest, woods or wildland fire	2	6	8	36.76955	High
142 Brush or brush-and-grass mixture	4	4	6	26.53300	Moderate
143 Grass fire	4	4	6	26.53300	Moderate

Table 8: Risk Score for Natural Vegetation Fire Incidents by Type

		Consequenc			Risk
Technical Rescue	Probability	е	Impact	Risk Score	Classification
				8.48528137	
340/41/42/43 Search for person	2	2	4	4	Low
351 Extrication from building	4	4	8	33.9411255	High
				28.1424945	
352 Extrication from vehicle	6	2	6	6	Moderate
				12.3288280	
353 Removal of victim from elevator	6	2	2	1	Low
				36.7695526	
354 Trench rescue	2	6	8	2	High
				36.7695526	
355 Confined space rescue	2	6	8	2	High
				36.7695526	
356 High angle rescue	2	6	8	2	High
				28.1424945	
357 Extrication from machinery	2	6	6	6	Moderate
				26.5329983	
361/363 Water rescue	4	4	6	2	Moderate
				25.9229627	
362 Ice rescue	2	4	8	9	Moderate

Table 9: Risk Score for Technical Rescue Incidents by Type

					Risk
HazMat	Probability	Consequence	Impact	Risk Score	Classification
411 Gasoline or other flammable					
liquid spill				0	
				26.5329983	
small	4	4	6	2	Moderate
				26.5329983	
large	4	4	6	2	Moderate
				28.1424945	
412 Gas leak	6	2	6	6	Moderate
413 Oil or other comb liquid spill				0	
				34.9857113	
small	4	6	6	7	High
				36.7695526	
large	2	6	8	2	High
				34.9857113	
422 Chemical spill or leak	4	6	6	7	High

					Risk
HazMat	Probability	Consequence	Impact	Risk Score	Classification
				12.3288280	
424 CO incident	6	2	2	1	Low
				36.7695526	
43x Radioactive condition	2	6	8	2	High
				28.1424945	
451 Biological hazard	2	6	6	6	Moderate

Table 10: Risk Score for HazMat Incidents by Type

#### **Target Hazards**

In addition to assessing risk by incident type, infrastructure was identified and listed by type and planning zone. This provided an overall assessment within the City of Fargo of infrastructure and occupancies that may offer additional risks beyond those normally associated with a structure fire or emergency involving the property. This infrastructure is divided into occupancy classifications and other types of infrastructure. These occupancies and infrastructure are often referred to as critical infrastructure or target hazards. Factors examined and considered that may increase risk include:

- Occupancy type
- Life safety
- Fire sprinklers
- Additional hazards present
- Economic loss potential

By placing these target hazards into a list format identified by planning zone, suppression personnel can review the occupancies located in their area and plan for incidents at these locations. The lists below can be adjusted as department personnel deem necessary.

Fire protection systems are included as part of the risk analysis for the target hazards listed below in the last column. It should also be noted that fire protection systems are part of the FFD inspection and pre-planning process. Pre-plans are available to crews for all inspected occupancies on the apparatus mounted mobile data computers (MDC's), which includes fire protection system information.

Nursing home/Assisted living facilities			
Name	Address	Planning Zone	Fire Protection System
SMP Health-St. Catherine North (Rosewood)	1351 Broadway	1	Complete
Bethany Retirement Living	201 University Dr S	1	Complete
The Meadows on University	1315 University Dr S	1	Complete
Elim Senior Living Community	3540 University Dr S	2	Complete
SMP Health-St. Catherine South (Villa Maria)	3102 University Dr S	2	Complete
Ecumen Evergreens of Fargo	1401 W Gateway Cir S	5	Complete
Bethany Retirement Living on 42nd	4255 30th Ave S	7	Complete
Edgewood Fargo	4420 37th Ave S	7	Complete
Eventide Fargo	3225 51st St S	7	Complete
Fargo Mapleview	4552 36th Ave S	7	Complete
Good Samaritan Society	4502 37th Ave S	7	Complete
Riverview Place	5300 12th St S	8	Complete
Elliott Place	4462 30 <sup>th</sup> Ave S	7	Complete
Touchmark at Harwood Groves	1200 Harwood Dr S	2	Complete

**Table 11: List of Nursing Home/Assisted Living Facility Target Hazards** 

Senior Living Facilities/Apartments			
			Fire Protection
Name	Address	Planning Zone	System
Cooper House Apartments	414 11th St N	1	Complete
Twin Towers	1110 3rd Ave N	1	None
University Dr Manor	1201 2nd Ave N	1	Complete
Prairiewood Meadows	137 Prairiewood Dr S	2/5	None
Park Place Apartments	2701 32nd Ave S	2	None
Village Apartments	2801 23rd Ave S	2	None
New Horizons	2525 Broadway N	3	Partial
Trollwood Village	3100 Broadway N	3	Complete
Touchmark at Harwood Groves	1200 Harwood Dr S	2	Complete

**Table 12: List of Senior Living Facilities/Apartment Target Hazards** 

Hospitals / Healthcare facilities			
Name	Address	Planning Zone	Fire Protection System
Family Health Care	301 NP Ave	1	Complete
Sanford - North campus	801 Broadway N	1	Complete
Sanford - South University	1720 University Dr S	1	Complete
Essentia	3000 32nd Ave S	2	Complete
Sanford - Southpointe	2400 32nd Ave S	2	Complete
University Medical Center (Urgent Med)	2829 University Dr S	2	Complete
Fargo VA Healthcare Center	2101 Elm St N	3	Complete
Sanford Health	2601 Broadway N	3	Complete
Fargo Cass Public Health	1240 25th St S	4	Complete
MEDPark Medical Center	4450 31st Ave S	7	Complete
PAM Health Rehabilitation Hospital	4671 38th St S	7	Complete
Sanford - Main campus	5225 23rd Ave S	7	Complete

Table 13: List of Hospitals and Healthcare Facility Target Hazards

Schools			
Name	Address	Planning Zone	Fire Protection System
Agassiz/Fargo Adult Learning Center (Dakota HS)	1305 9th Ave S	1	Partial
Ben Franklin Middle School	1420 8th St N	1	Partial
Clara Barton Elementary	1417 6th St S	1	Partial
Grace Lutheran School	1025 14th Ave S	1	None
Hawthorne Elementary	555 8th Ave S	1	Complete
Holy Spirit Elementary	1441 8th St N	1	None
Horace Mann Elementary	1025 3rd St N	1	Complete
Lincoln Elementary	2120 9th St S	1	Complete
Nativity Elementary School	1825 11th St S	1	Complete
Oak Grove High	124 N Terrace N	1	Complete
Roosevelt Elementary	1026 10th St N	1	Complete
Discovery Middle School	1717 40th Ave S	2	Complete
Eagles Elementary	3502 S University Dr	2	Complete
Ed Clapp Elementary	3131 28th St SW	2	Complete
Oak Grove Elementary	2720 32nd Ave S	2	Complete
Longfellow Elementary	20 29th Ave NE	3	Partial
McKinley Elementary	2930 8th St N	3	None
North High	801 17th Ave N	3	Complete
Washington Elementary	1725 Broadway N	3	Complete
Carl Ben Eielson Middle School	1604 13th Ave S	4	Complete
Jefferson Elementary	1701 4th Ave S	4	Complete
Lewis & Clark Elementary	1729 16th St S	4	None
Madison Elementary	1040 29th St N	4	None
South High	1840 15th Ave S	4	Complete
Willow Park Elementary	4901 15th Ave S	5	Complete
Independence Elementary	3700 54th St S	7	Complete
Kennedy Elementary	4401 42nd St S	7	Complete
Osgood Elementary	5550 44th Ave S	7	Complete
Meadowlark Elementary	5801 51st Ave S	7	Complete
Bennett Elementary	2000 58th Ave S	8	Complete
Centennial Elementary	4201 25th St S	8	Complete
Davies High	7150 25th St S	8	Complete
Shanley High School	5600 25th St S	8	Complete
Sacred Heart Middle School	5600 25th St S	8	Complete
Deer Creek Elementary	6400 54th Ave S	9	Complete

Table 14: List of School Target Hazards

Critical Infrastructure			
Name	Address	Planning Zone	Fire Protection System
Fargo City Hall	225 4th St N	1	Complete
Fire Station 1	637 NP Ave	1	Complete
Red River Regional Dispatch Center	300 NP Ave	1	Complete
Water Treatment plant	435 14th Ave S	1	Complete
Fire Station 2	3020 25th St S	2	Partial
Fire Station 3	1101 25th St N	3	None
Hector International Airport	2801 32nd Ave N	3	Complete
Water Reclamation	3400Broadway N	3	Partial
Cass County Jail	450 34th St S	4	Complete
Fargo Police Department	105 25th St N	4	Complete
Fargo Public Works	402 23rd St N	4	Complete
Fire Station 4	2701 1st Ave N	4	None
Fire Station 5	930 40th St S	5	None
Fire Station 6	4630 15th Ave N	6	Complete
Fire Station 7	3957 Village Lane S	7	Complete
Fire Station 8	6617 33rd St S	8	Complete

**Table 15: List of Critical Infrastructure Target Hazards** 

Commercial			
Name	Address	Planning Zone	Fire Protection System
AT&T	409 1st Ave N	1	Partial
Hawkins Water Treatment Group	2001 Great Northern Dr	4	Complete
Tecton Products	4401 15th Ave N	6	Complete
Aldevron	4055 41st Ave S	8	Complete

Table 16: List of Commercial Target Hazards

#### **Non-Fire Risks**

# **Transportation:**

Like most commercial centers, Fargo is a transportation center. The city is at the crossroads of two interstate highways, has an international airport, and two major rail lines. Commercial passengers are served through five major airlines as well as Amtrak and Jefferson Bus Lines. As a transportation center, there is risk from mass casualty incidents as well as a significant risk from hazardous materials transportation.

The two rail lines are major arteries that carry up to 100 trains per day. A wide variety of products are carried on these trains, but several trains per day carry various hazardous chemicals, many associated with agriculture such as anhydrous ammonia. There are also several trains a day carrying ethanol and Bakken crude oil from the western part of the state, which has the potential to be a serious concern. These trains cross through planning zones 1, 4, 5, 6, and 10.

Interstate 94 (I-94) runs east and west through the city. It crosses the Red River on the border of planning zone PZ 1 and PZ 2. The bridge over the river has historically been the site of many vehicle crashes but currently has a de-icing system installed which has reduced crashes. Interstate 29 (I-29) runs north and south through the city. Both interstates have large numbers of over the road trucks carrying hazardous materials and other freight that pass through the city daily.

Hector International Airport and the North Dakota Air National Guard Base (NDANG) are each located in the city within PZ 3. The airport and NDANG are adjacent to one another and share the same runways. The NDANG does not currently have a flight mission or a full-time fire department, so the FFD has the primary fire protection for structures on the base. The FFD provides emergency response to the Hector International Airport terminal buildings and other privately-owned facilities and structures located on or near airport property. The Hector Airport Authority established its own aircraft crash/rescue fire department in October of 2014 that is staffed 24 hours a day, 7 days a week and provides aircraft rescue and firefighting (ARFF)

protection for the airfield. The FFD assists the Hector Airport FD with emergencies on the airfield through a memorandum of understanding (MOU).

# **Pipelines:**

Several pipeline corridors run through the city. These carry refined petroleum products such as gasoline, fuel oil, jet fuel, natural gas, and ethanol. The petroleum pipelines run through PZ 2, 5 and 6 and cross the Red River in PZ 2. One corridor carries a six inch and a ten-inch pipeline. The other right of way has one ten-inch pipeline. A natural gas pipeline crosses into Fargo from Moorhead in PZ 3. An ethanol pipeline runs through PZ's 6 and 3.

#### **Terrorist Threats:**

A number of potential targets have been identified within the city. Fargo, on a national level, is not considered a likely terrorist target but as a regional center with gatherings of large numbers of people, it does have some risk. The Federal Court House has been the site of a number of high-profile cases in the past few decades. The FargoDome and Scheels Arena, both multi-use assembly and sporting arenas, regularly see large crowds of people. West Acres Shopping Center is a regional shopping destination. North Dakota State University has received protests over their handling of animals. Fargo is also a regional host for parades and craft fairs. In July of 2023, Fargo suffered an active shooter event that claimed the life of a Fargo Police officer and critically wounded three others. The FFD and Fargo Police Department conduct regular training events to prepare for situations involving active assailants.

#### **Rivers & Lakes:**

Because of the flat terrain, there is an annual threat of flooding. The Red River of the North provides the entire eastern border of the City of Fargo. The Red River is unique in the fact that it flows north into the ice and colder temperatures. The city is located between two other rivers that join with the Red. The Wild Rice River joins the Red River approximately one mile south of Fargo and the Sheyenne River joins the Red River approximately four miles north of the city. The Wild Rice is a much smaller river, but during the spring it carries almost as much water as the Red. In addition, when the Sheyenne River exceeds 22 feet it breaks out and spills into the Wild Rice River increasing the level of flooding in Fargo. Ice jams on any of these three rivers

have a significant impact on the severity of flooding. During normal river conditions, the rescue potential is low risk, but significant flooding is considered high risk in the fact that there is the potential for large scale rescues in the event of a levee breach. Various levels of evacuation & contingency plans have been developed for such an event. Flooding is also considered high risk because of the potential to cause significant damage to property and to the economy (the most recent significant floods are described under Natural Disasters). There is a diversion project underway that aims to reduce the risk of flooding to the Fargo-Moorhead metropolitan area, the project aims to complete in 2027.

The Red River has some recreational traffic including fishing, boating, and kayaking near three man-made dams within city limits. These were changed from low head dams which created an extreme drowning potential to areas of rip rap which make the area safer, but still hold some risk of water accidents. During the winter, unstable ice conditions pose a risk. The river is the major source of water for both Fargo and Moorhead, therefore, is vulnerable to a chemical spill with potential consequences beyond normal environmental concerns. A hazardous materials spill in the Red River could be a serious incident that could demand considerable resources for a substantial amount of time. The river borders planning zones 1, 2, 3, and 8.

Located within the city are several small man-made lakes and water containment areas. The lakes are located within residential areas and pose typical water related risks. The lakes are primarily for cosmetic purposes. Small, non-motorized watercraft can be used but there is very little recreational activity. While there is always the possibility of an accident, to date there have been very few calls for service related to the lakes. During severe thunderstorms and spring flooding, water containment areas and drainage canals are often at full capacity. When this occurs, there is a corresponding increase in calls for service to these areas. Typically, they involve motorized vehicles. The bulk of these lakes and containment areas are located within planning zones 2, 7, and 8.

#### **Hazardous Materials:**

Hazardous materials incidents are categorized according to three levels of risk by the FFD; low, moderate, and high. Low risk is for non-life threatening, less than five-gallon spill incidents handled by one apparatus.

Along with the risk from hazardous chemicals as a transportation center, there are many sites in the city that have sizable amounts of hazardous chemicals stored and used on site. The department inspects all commercial buildings and tracks the amount of hazardous materials stored in all buildings. The department includes this information in the database available on MDC's in each apparatus. One means of locating businesses that use or store chemicals is through The Superfund Amendments and Reauthorization Act (SARA), which requires all businesses to report to state and local officials' substantial quantities of hazardous chemicals stored on the premises.

#### **Natural Disasters:**

Potential natural disaster risks primarily include springtime flooding, summer thunderstorms, tornadoes, and winter blizzards and snowstorms. During recent years, the Red River of the North has passed into flood stage at least once per year. During most years, flooding is minor. However, about every decade the city experiences a major flood event. The Red River flood of 1997 had been the most severe flood of the river since 1826. On April 17<sup>th</sup> 1997, the Red River crested in Fargo at 39.5 feet which is 22 feet above flood stage; at that time the second highest crest in recorded history. While there were some properties lost to flooding, dike-building efforts were able to prevent the water from flooding into a majority of the city. On March 28, 2009 the Red River crested at 40.8 feet, making it the highest recorded flood in Fargo's history. This was considered a level one disaster bringing in many federal and state resources. Because of the outpouring of volunteers and the efforts of all the agencies involved, temporary levees and dikes were built to the 43-foot level resulting in flood damage to the city being held to a minimum. Since 1997, significant efforts have been made to lessen the effects of severe flooding within the city. However, as a result of this flooding FEMA has adjusted the flood plain elevations for this region, which has forced a significant number of property owners within the city to purchase flood insurance. Because of this recurring threat and additional financial burden placed on

property owners, the top priority for city leaders is obtaining permanent flood protection. A flood diversion project has been developed and is scheduled to be completed in 2027.

Severe thunderstorms and tornadoes are potential disaster risks during warm weather months. Most thunderstorm activity occurs in June, July, and August, with August being the most active month. Fargo averages 35 thunderstorms per year. Tornadoes are an ever-present threat associated with thunderstorms. Fargo suffered severe loss of life and property damage when struck by an F5 tornado on June 20, 1957. Tragically, 10 people lost their lives due to the tornado.

The city is known for its long, cold, snowy winters and blizzard conditions. Heavy snow accumulation has caused roofs to collapse. During blizzards and heavy snow events, snow blocked streets can make travel with fire trucks difficult. Double digit sub-zero winter temperatures require precautions to maintain an effective water supply. Apparatus and fire ground operations are adapted to help deal with the frigid temperatures. The FFD has a good working relationship with the Public Works Department during winter events. Plow crews respond quickly when requested to open blocked streets.

### **Economic Risks:**

The FFD considers the protection of the economy a primary strategy in planning for fire protection. One means of assessing risk to the economy is an assessment of jobs. Table 17 contains the ten largest employers in the City of Fargo according to the Fargo Moorhead West Fargo Chamber of Commerce.

	City of Fargo's Largest Employers	FTE*
1	Sanford Fargo Medical Center	9349
2	North Dakota State University	4156
3	Essentia Health	2690
4	Fargo Public School District No. One	1860
5	Noridian Healthcare Solutions	1511
6	US Bank	1213
7	Fargo VA Health Care System	1186
8	Microsoft	1024
9	Integrity Windows and Doors	1000
10	Blue Cross Blue Shield of North Dakota	948
	*FTE=Full-time employee equivalents	


**Table 17: City of Fargo's Largest Employers** 

The Fargo Moorhead Metropolitan Council of Governments (Metro COG) assembles census data for each specific area of the city to determine traffic patterns for the metropolitan area. It breaks the information into small parcels that make it easy to assign specific information to specific areas, such as planning zones. The census data provides the number and type of jobs for each particular area.

# **Description of Loss and Injury**

#### **Fire Loss:**

Figure 10: Total Fire Loss in Dollars Figure 10 shows the total fire related dollar loss from 2020 to 2024. Higher than normal loss incidents include: in 2020, a nursing home facility that was a total loss of over \$2,000,000 and two large apartment buildings that totaled nearly \$1,500,000; in 2021 a commercial strip mall sustained \$1,250,000 in loss and an apartment building at \$360,000. In 2024, a restaurant sustained \$490,000 in damages. In addition, two separate apartment fires combined for a total of \$787,500.

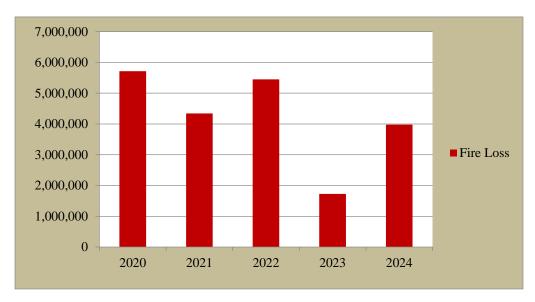

**Figure 10: Total Fire Loss in Dollars** 

# Fire Related Civilian Deaths and Injuries:

Death and injury rates are difficult to trend due to the low occurrence of death and injury from fire in Fargo. One catastrophic fire could change trends dramatically. Fire injuries are also difficult to compare due to civilians not reporting injuries when the fire department is not called or when they seek treatment on their own. Figure 11 is a chart showing civilian fire deaths and injuries from 2020 to 2024.

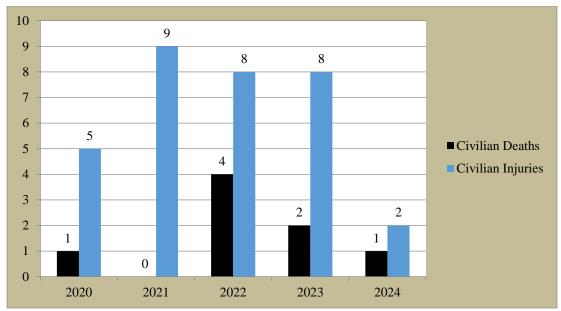


Figure 11: Civilian Fire Deaths and Injuries 2020-2024

It has been demonstrated that socioeconomic factors affect the demand for fire department services. Fire deaths in the biggest cities are roughly 50% higher than in small cities, but fire deaths in rural communities with populations less than 5,000 are more than 100% higher. The peak rates in very small and very large communities are concurrent with high poverty rates in these two types of communities.

# **Firefighter Injuries:**

Figure 12 represents the number of reported firefighter injuries in the FFD from 2020 to 2024. The number of firefighter injuries has increased in recent years mostly because of a change in reporting procedures. The City of Fargo began to more rigorously enforce Workers' Compensation requirements in the last few years. These requirements set the expectation that firefighters report any injury, whether or not the individual seeks medical attention. In the past, this was not emphasized and many small injuries did not get reported when the individuals did not seek medical attention. More reports of small injuries can result in the potential for changes that improve safety.


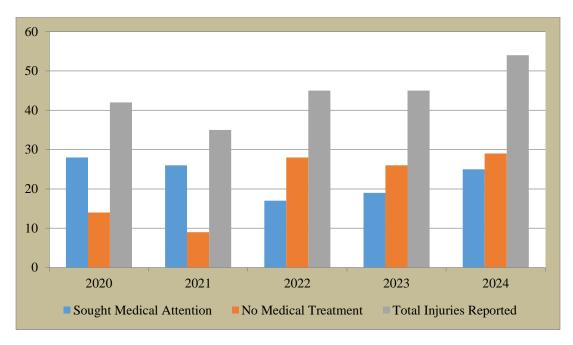


Figure 12: Firefighter Injuries, 2020-2024

#### **Demand for Service**

### **Total Calls for Service:**

Combined with the level of risk, an analysis of demand for service is important to assess the need for fire suppression resources. First, an overview of the number and types of incidents in the entire jurisdiction is useful to see the general demands on the fire protection system. Table 18 shows the number and type of calls per year.

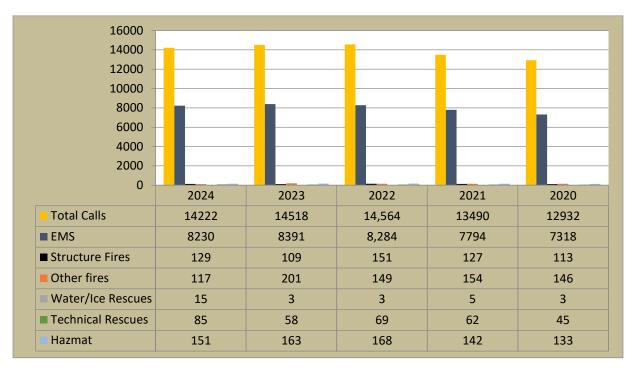

**Table 18: Total Calls for Service 2020 – 2024** 

### **Calls for Emergency Medical Services:**

Medical calls are prioritized using the ProQA Dispatch System, which provides an emergency medical dispatch (EMD) code to each call on a scale of increasing severity from A-E. Until 2012, the FFD responded to medical calls coded either D or E. It had been determined that restricting FFD responses to calls with a heightened level of risk would increase unit reliability and focus resources where they would have a significant positive impact on patient outcomes. In 2012, in an effort to decrease call processing times, the FFD began responding to all calls coded C, D or E. In March of 2015, in a further attempt to reduce call processing times, the FFD began responding to medical calls for service based on chief complaint. The ProQA process is then continued by dispatchers and if an EMD code of A or B results prior to the unit's arrival, the

company officer is instructed to decide based on their assessment of the available information. The unit will either continue or cancel, depending on whether or not the company officer believes a positive impact on patient outcomes can be achieved. These efforts have increased run volume significantly. Although these efforts have decreased call handling times to a certain degree, reducing call processing times continues to be an ongoing challenge. The Red River Regional Dispatch Center (RRRDC) dispatches for numerous agencies in two counties in two states and is not under direct control of the City of Fargo. FFD staff continue to work with the RRRDC to find ways to bring processing times in line with national standards. Table 19 shows EMS calls by EMD code. Not listed before 2023 are code "G- ProQA aborted" by dispatchers, "O" which is lower than "A" in severity, or calls that were not assigned a code.

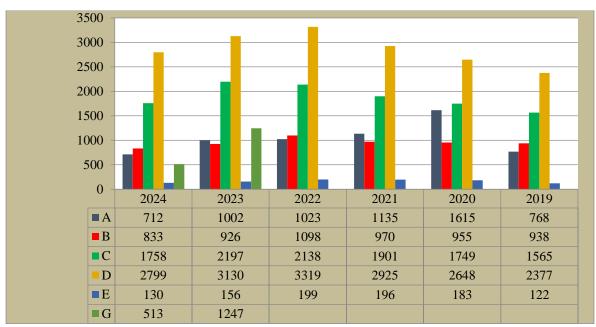


Table 19: Calls for Medical Dispatch Code A-E 2020 - 2024

### Calls by Planning Zone:

A more thorough look at the individual planning zones allows for a better appraisal of demand for service. Incident data for the last five years has been added to the summary for each planning zone. For the ease of comparison, only 2024 data was used in the following graphs to demonstrate the demand in the planning zones. Table 20 shows the total number of incidents along with the number of medical calls, the number of fires, and the number of other calls for each planning zone.

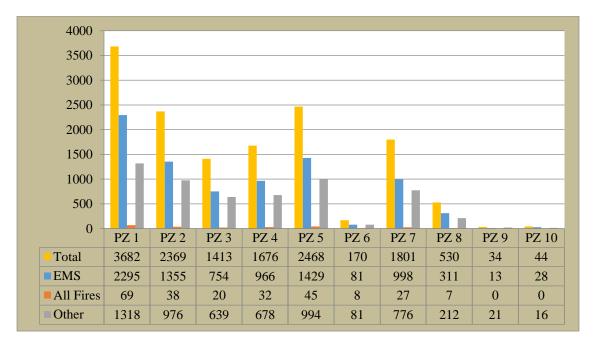


Table 20: 2024 Calls by Planning Zone

From the chart, it can be seen that PZ 1 has the greatest number of calls for service. PZ's 2 and 5 have similar numbers of incidents with PZ's 3, 4, and 7 all close to similar numbers. PZ's 6, 8, and 9 have relatively low numbers of incidents. Most of the planning zones have a similar ratio of medical to non-medical calls for service that range between 50% and 60% with variations from year to year. The exception is PZ 6 where the ratios are consistently lower due to the fact that PZ 6 is mostly industrial with a low population density. PZ's 9 and 10 are used for tracking purposes only and do not currently have fire stations. PZ 9 is covered by Stations 7 and 8 and PZ 10 is covered by Station 3.

# **Summary of Risks by Planning Zone**

The following pages summarize risk assessments by planning zone.

# Planning Zone 1:

### **Risk Factors**

- Covers 4.3 square miles.
- Current population density of 5,571 people per square mile.
- Contains 107 road miles.
- Two railroads pass through the zone.
- Borders I-94 on the south
- Red River of the North travels the length of the east border.
- Highest number of incidents of all types of any planning zone.

### **Risk Diminishing Factors**

No peripheral areas with significant delay in secondary and tertiary responses.

Table 21 shows historical data on all calls for service for the primary service area residing inside Planning Zone 1.

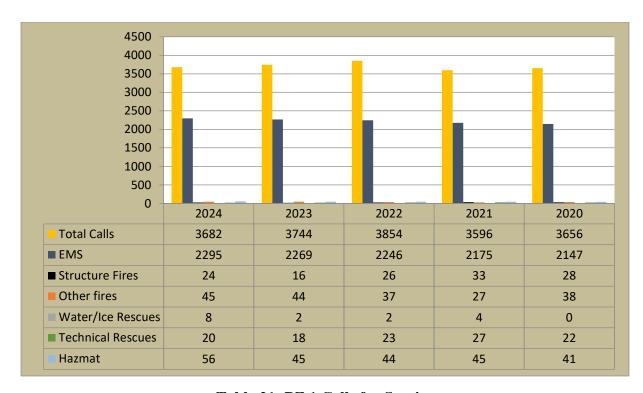


Table 21: PZ 1 Calls for Service

2024 % of PZ 1 Incidents		
EMS	62 %	
Structure fires	0.7 %	
All fires	1.9 %	



### Planning Zone 2:

### **Risk Factors**

- Covers 7.6 square miles.
- Current population density of 3,967 people per square mile.
- Contains 124 road miles.
- Three petroleum pipelines cross the Red River and traverse the rest of the zone.
- Borders I-94 and I-29.
- Red River travels the length of the east border.
- Third highest number of incidents of all planning zones.
- Secondary responses will improve with St. 8 being opened as of October 2024.

- Low number of manufacturing jobs.
- Low number of buildings with reportable amounts of hazardous materials.

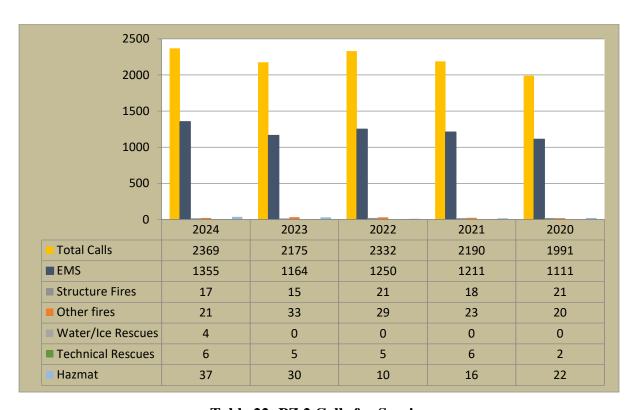


Table 22: PZ 2 Calls for Service

2024 % of PZ 2 Incidents		
EMS	57 %	
Structure fires	0.7 %	
All fires	1.6 %	



# Planning Zone 3:

#### **Risks Factors**

- Covers 8.8 square miles.
- Population density of 2,007 people per square mile. This excludes the airport property and sewage lagoons in the calculation.
- Contains 86 road miles.
- NDSU campus with significant number of people, high risk buildings, and hazardous chemicals. Substantial portion of NDSU campus at edge of or beyond 1.5 mile travel distance.
- Airport with ARFF provided by Hector FD, structural protection through the FFD.
- One railroad borders this zone.
- Red River travels the length on the east side.
- Number of incidents is substantial.
- Peripheral areas to the north with potential delay in secondary and tertiary responses.

### **Risk Diminishing Factors**

Low number of manufacturing jobs

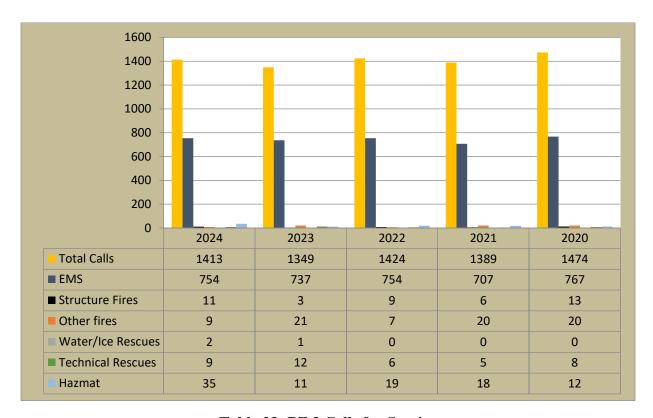


Table 23: PZ 3 Calls for Service

2024 % of PZ 3 Incidents		
EMS	53 %	
Structure fires	0.8 %	
All fires	1.4 %	



# Planning Zone 4:

### **Risks Factors**

- Covers 4.3 square miles.
- Current population density of 2,843 people per square mile.
- Contains 65 road miles.
- Two railroads pass through the zone with one switching yard.
- Highest number of manufacturing jobs.
- Substantial number of incidents.

# **Risk Diminishing Factors**

• No peripheral areas with significant expectations of delay in secondary and tertiary responses.

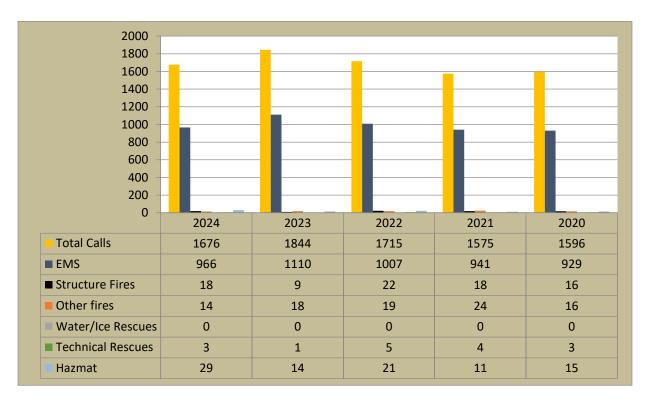


Table 24: PZ 4 Calls for Service

2024 % of PZ 4 Incidents		
EMS	58 %	
Structure fires	1.1 %	
All fires	1.9 %	



# Planning Zone 5:

#### **Risk Factors**

- Covers 3.8 square miles.
- Current population density of 4,395 people per square mile.
- Contains 60 road miles.
- One pipeline passes through the zone.
- One railroad passes through the zone.
- I-29 and I-94 both pass through this zone.
- Second highest number of incidents.

# **Risk Diminishing Factors**

• Limited peripheral areas with significant expectations of delay in secondary and tertiary responses.

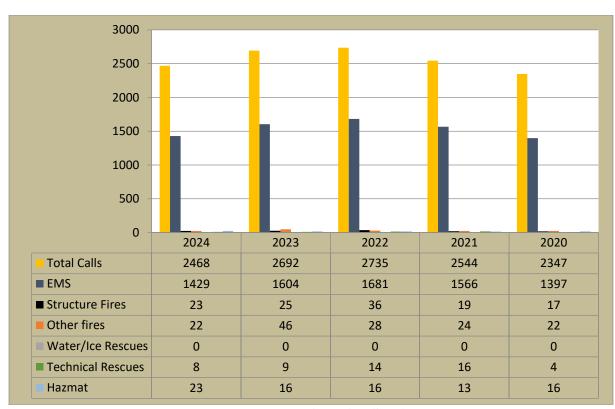


Table 25: PZ 5 Calls for Service

2024 % of PZ 5 Incidents		
EMS	58 %	
Structure fires	0.9 %	
All fires	1.8 %	



# Planning Zone 6:

#### **Risk Factors**

- Covers 6.3 square miles.
- Contains 49 road miles.
- One pipeline passes through the zone.
- One railroad passes through the zone.
- I-29 passes through this zone.
- High number of manufacturing jobs.

- Current population density that is negligible.
- 9 single family houses.
- Low overall demand for service.
- Low population base decreases demand for medical assists.

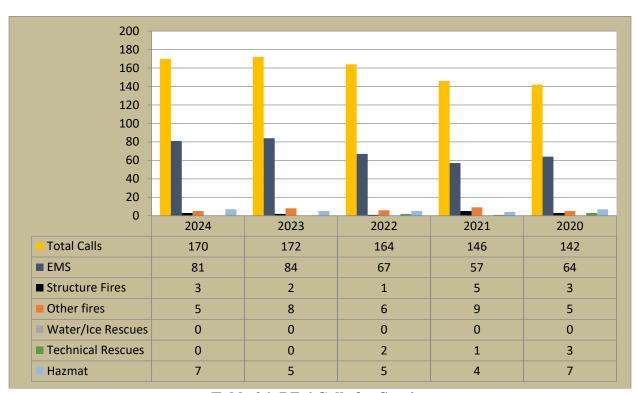


Table 26: PZ 6 Calls for Service

2024 % of PZ 6 Incidents		
EMS	48 %	
Structure fires	1.8 %	
All fires	4.7 %	



# Planning Zone 7:

#### **Risk Factors**

- Covers 6.7 square miles.
- Current population density of 4,162 people per square mile.
- Contains 103 road miles.
- Peripheral areas with potential delay in secondary and tertiary responses.
- One pipeline passes through the zone.
- I-29 and I-94 border the zone.
- Growing number of incidents.

# **Risk Diminishing Factors**

• Predominately newer construction.

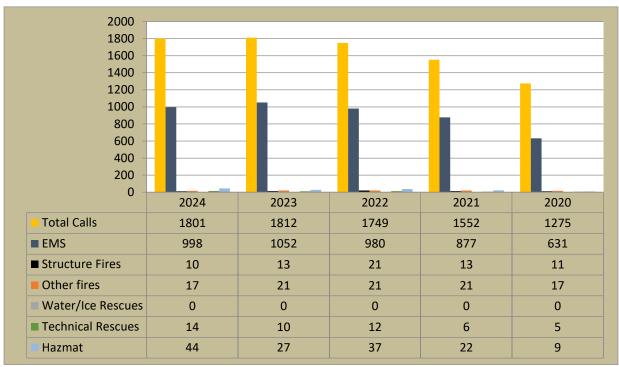


Table 27: PZ 7 Calls for Service

2024 % of PZ 7 Incidents		
EMS	55 %	
Structure fires	0.6 %	
All fires	1.5 %	



# Planning Zone 8:

#### **Risk Factors**

- Covers 4.3 square miles.
- Current population density of 2,329 people per square mile and growing.
- Contains 70 road miles.
- Peripheral areas with potential delay in secondary and tertiary responses.
- Red River travels the length on the east side.
- I-29 borders this zone.

- Predominately newer construction.
- Low, but growing demand for service.
- Fire Station 8 was opened in October 2024.
- Planning Zone was restricted slightly when the station opened.

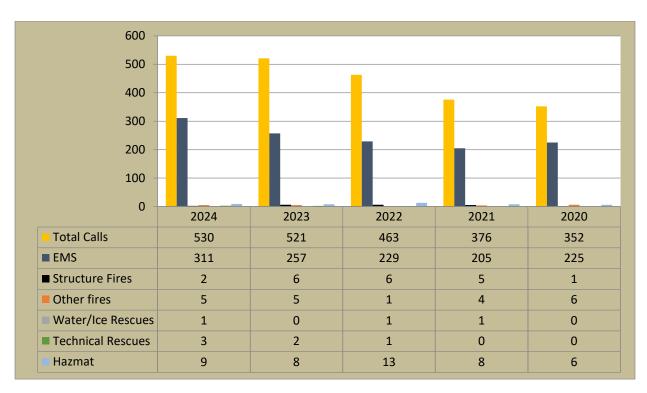


Table 28: PZ 8 Calls for Service

2024 % of PZ 8 Incidents		
EMS	59 %	
Structure fires	0.4 %	
All fires	1.3 %	



# Planning Zone 9:

#### **Risk Factors**

- Covers 2.2 square miles.
- Current population density at 1,416 people per square mile.
- Contains 30 road miles.
- Potential for delay in primary response.
- Peripheral areas with potential delay in secondary and tertiary responses.
- Bordered by PZ 7 on the north, PZ 8 on the east, and Horace on the west.
- No fire station covered primarily by Station 7 and 8.

- Will be new construction.
- Currently has a very low demand for service.
- Planning zone was restructured with the opening of Station 8


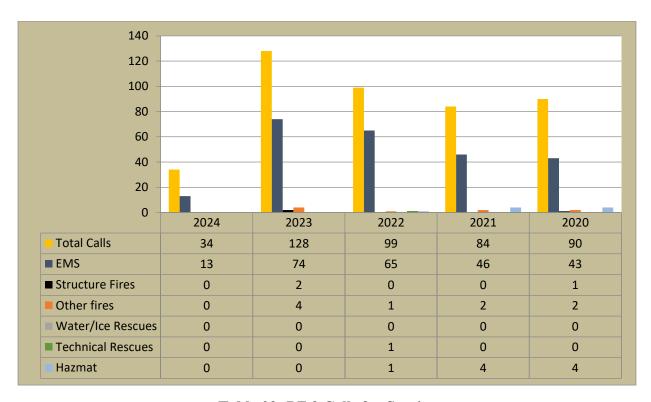


Table 29: PZ 9 Calls for Service

2024 % of PZ 9 Incidents		
EMS	38 %	
Structure fires	0 %	
All fires	0 %	

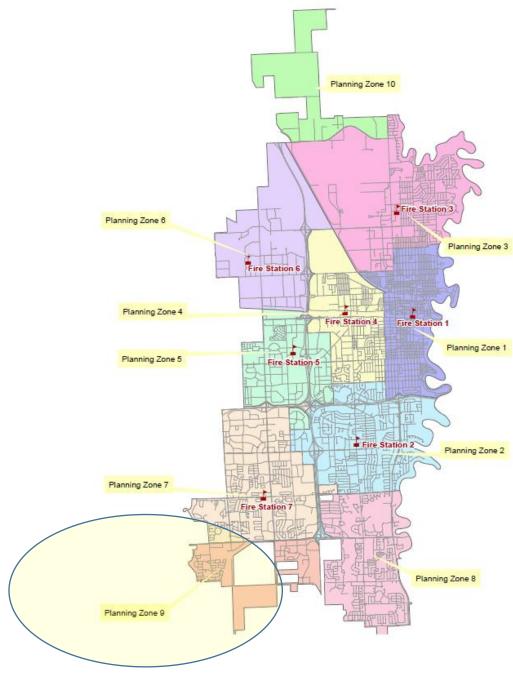

# Planning Zone 10:

#### **Risk Factors**

- Covers 3.3 square miles.
- Current population density at 135 people per square mile.
- Contains 16 road miles.
- Potential for delay in primary response.
- Peripheral areas with potential delay in secondary and tertiary responses.
- Bordered by PZ 3 on the south and east, PZ 6 on the west.
- No fire station covered primarily by Station 3.
- Very large warehouses located here (Amazon)

- Industrial
- Currently has a very low demand for service.


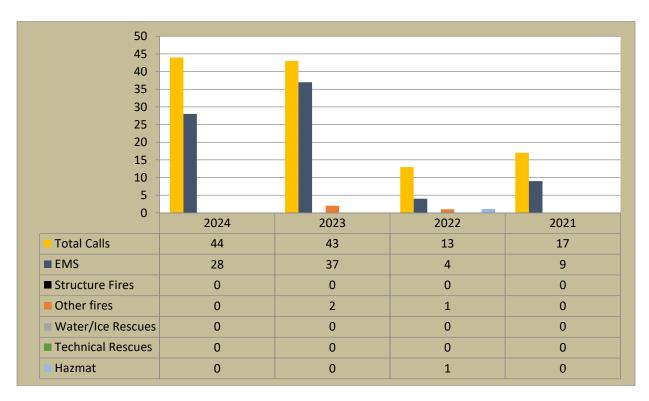


Table 30: PZ 10 Calls for Service

2024 % of PZ 10 Incidents		
EMS	64 %	
Structure fires	0 %	
All fires	0 %	

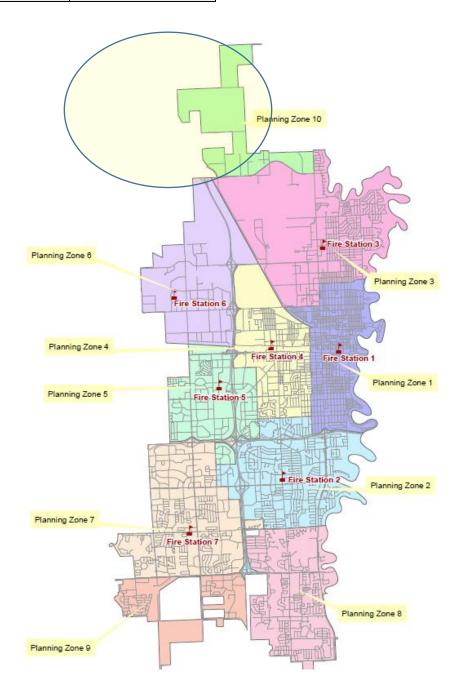

# **Development and Growth within the Planning Zones**


The City of Fargo's 2024 growth plan addresses the future development of the city. One item the plan focuses on that has a positive impact on providing fire protection is reducing urban sprawl which results from leapfrog development. Urban sprawl results in an uneconomical pattern of extended urban services (Heamavihio, 2007). Reducing this type of development would allow for a more efficient fire protection system.

While the growth plan contains plotted areas to the north of the city, the majority of the growth is to the south of the city. On the north side of the city, several factors deter growth such as the airport and sewage lagoons. The city is limited in growth to the west due to the cities of West Fargo and Horace and on the east because of the Red River and state of Minnesota. During the 1980's and early 1990's, the majority of southerly growth occurred between the Red River and I-29. During the spring flood of 1997, river and overland flooding made this area vulnerable.

# **Section 4: Deployment and Performance**

# **Fire Stations Coverage Area**

Identifying the total number of high-risk buildings throughout the city can aid in identifying the overall level of risk in each planning zone. This does not, however, identify weaknesses in the fire protection system. One means of evaluating the level of protection throughout the City of Fargo is to use the Insurance Services Office (ISO) standard of a 1.5-mile travel distance for engine companies and a 2.5-mile travel distance for truck companies. This 1.5-mile travel distance for engine companies provides a good means of determining efficient station location and has been used by the FFD. For the most recent ISO rating of 1 for the City of Fargo, dated in 2018, a deployment analysis was used rather than the travel distance maps. The deployment analysis earned 8.81 points out of a possible 10. The ISO travel distance numbers are still used to evaluate station locations.

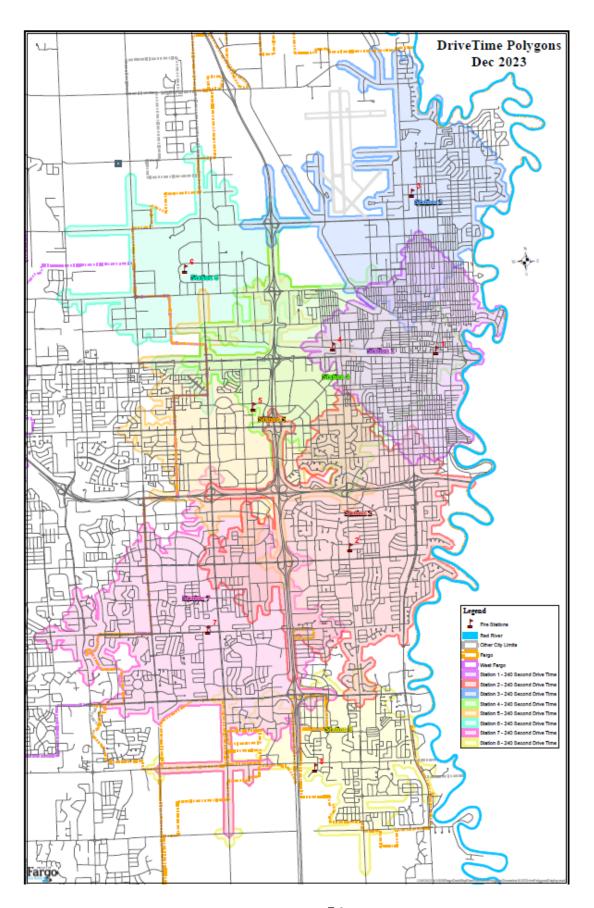

# **Critical Tasks and Effective Response Force**

In order to establish an effective response force (ERF), the specific tasks necessary to mitigate a given situation are examined. Once these tasks have been identified, the number of personnel and apparatus needed to complete these tasks can be determined. The FFD considers the following incident types when determining the necessary ERF for successfully mitigating an event. It is important to remember that the incident commander has the authority to call for any additional resources deemed necessary should an incident show the potential to escalate beyond the capabilities of the assigned resources. The emergency situations defined include:

- Low, moderate, and high-risk fires
- Low, moderate, and high-risk EMS
- Low, moderate, and high-risk technical rescue incidents.
- Low, moderate, and high-risk hazardous materials incidents
- Low, moderate, and high-risk wildland fires

Low Risk Fire		
1 engine company staffed with 3 personnel.		
Apparatus Critical Task Minimum Personnel		
1 <sup>st</sup> Engine	Command/Safety/Communications	1
1 <sup>st</sup> Engine	Pump Operator	1
1 <sup>st</sup> Engine	Attack Line	1
	Total ERF	3

Moderate Risk Fire			
	1 <sup>st</sup> Alarm - 1 command vehicle staffed with 1 person, 4 engine companies staffed with 3 personnel each, and 1 truck company staffed with 3 personnel.		
Apparatus	Apparatus Critical Task Minimum Personnel		
Batt. Chief	Command/Safety/Communications	1	
1 <sup>st</sup> Engine	Pump Operator	1	
1 <sup>st</sup> Engine	Attack Line	2	
1 <sup>st</sup> Truck	Search and Rescue	3	
2 <sup>nd</sup> Engine	Water Supply	1	
2 <sup>nd</sup> Engine	Ventilation	2	
3 <sup>rd</sup> Engine	Second Attack Line	3	
4 <sup>th</sup> Engine	RIC	3	
	Total ERF	16	

# **High Risk Fire**

1<sup>st</sup> Alarm - 1 command vehicle staffed with 1 person, 4 engine companies staffed with 3 personnel, and 1 truck company staffed with 3 personnel. 2<sup>nd</sup> Alarm – 2<sup>nd</sup> command vehicle staffed with 1 person, and 5th engine company staffed with 3 personnel. 3<sup>rd</sup> Alarm – 6<sup>th</sup> engine company staffed with 3 personnel.

Apparatus	Critical Task	Minimum Personnel
1 <sup>st</sup> Batt. Chief	Command/Communications	1
1 <sup>st</sup> Engine	Pump Operator	1
1 <sup>st</sup> Engine	Attack Line	2
1 <sup>st</sup> Truck	Ventilation	3
2 <sup>nd</sup> Engine	Water Supply	1
2 <sup>nd</sup> Engine &3 <sup>rd</sup> Engine	Search and Rescue	5
4 <sup>th</sup> Engine	Second Attack Line	3
2 <sup>nd</sup> Batt. Chief	Safety Officer	1
5 <sup>th</sup> Engine	RIC	3
	Total ERF	23

The high risk fire table above represents a typical 3 alarm response. It is the maximum response force available that could feasibly respond inside the time constraints of NFPA 1710. Expanded events or high rise fires require multiple alarm call-backs and an extended period of time for a suitable ERF to be assembled.

Low Risk EMS		
1 engine company staffed with 3 personnel.		
Apparatus	Critical Task	Minimum Personnel
1 <sup>st</sup> Engine	Command/Safety/Communications	1
1 <sup>st</sup> Engine	Patient assessment/Interventions	2
	Total ERF	3

Moderate Risk EMS		
1 command vehicle staffed with 1 person, 3 engine companies staffed with 3 personnel.		
Apparatus Critical Task Minimum Personnel		
Batt. Chief	Command/Safety/Communications	1
1 <sup>st</sup> Engine	Scene Safety	3
2 <sup>nd</sup> Engine	Incident/vehicle stabilization	3
3 <sup>rd</sup> Engine	Patient assessment/Interventions	3
	Total ERF	10

# **High Risk EMS**

 $1^{\text{st}}$  Alarm - 1 command vehicle staffed with 1 person, 4 engines staffed with 3 personnel, and 1 truck company staffed with 3 personnel.  $2^{\text{nd}}$  Alarm  $-2^{\text{nd}}$  command vehicle staffed with 1 person, and 5th engine company staffed with 3 personnel.  $3^{\text{rd}}$  Alarm  $-6^{\text{th}}$  engine company staffed with 3 personnel.

Apparatus	Critical Task	Minimum Personnel
Batt. Chief	Command/Safety/Communications	1
1 <sup>st</sup> truck & 1 <sup>st</sup> Engine	Incident/vehicle stabilization	6
2 <sup>nd</sup> , 3 <sup>rd</sup> , 4 <sup>th</sup> , 5 <sup>th</sup> & 6 <sup>th</sup>		
Engine	Patient assessment/Interventions	15
2 <sup>nd</sup> Batt.		
Chief	Incident Safety Officer	1
	Total ERF	23

Low Risk Technical Rescue		
1 engine company staffed with 3 personnel.		
Apparatus	Critical Task	<b>Minimum Personnel</b>
1 <sup>st</sup> Engine	Command/Safety/Communications	1
1 <sup>st</sup> Engine	Search/Rescue/victim removal	2
	Total ERF	3

## **Moderate Risk Technical Rescue**

1<sup>st</sup> Alarm - 1 command vehicle staffed with 1 person, 1 engine company cross staffed with TRT vehicle & trailer, 3 engine companies staffed with 3 personnel each, and 1 truck company staffed with 3 personnel.

Apparatus	Critical Task	Minimum Personnel
1 <sup>st</sup> Batt. Chief	Command/Safety/Communications	1
1 <sup>st</sup> Engine	Primary Search/Rescuers	3
2 <sup>nd</sup> Engine/TRT vehicle and 1 <sup>st</sup> Truck	Additional/Backup Searchers/Rescuers	6
3 <sup>rd</sup> Engine	Riggers/Rope Tenders/Air Supply	3
4 <sup>th</sup> Engine	Boat/Tool/Equipment Operators/Support Staff	3
	Total ERF	16

# **High Risk Technical Rescue**

 $1^{st}$  Alarm - 1 command vehicle staffed with 1 person, 1 engine company cross staffed with TRT vehicle & trailer with 3 personnel, 3 engine companies staffed with 3 personnel each, and 1 truck company staffed with 3 personnel.  $2^{nd}$  Alarm  $-2^{nd}$  command vehicle staffed with 1 person and  $5^{th}$  engine staffed with 3 personnel.  $3^{rd}$  Alarm  $-6^{th}$  engine company staffed with 3 personnel.

Apparatus	Critical Task	Minimum Personnel
1st Batt. Chief	Command/Communications	1
1 <sup>st</sup> Engine	Primary Search/Rescuers	3
2 <sup>nd</sup> Engine/TRT vehicle and 1 <sup>st</sup> Truck	Additional/Back up Search/Rescuers	6
3 <sup>rd</sup> Engine	Riggers/Rope Tenders/Air Supply	3
4 <sup>th</sup> , 5 <sup>th</sup> & 6 <sup>th</sup> Engine	Boat/Tool/Equipment Operators/Support Staff	9
2 <sup>nd</sup> Batt. Chief	Safety	1
	Total ERF	23

Low Risk Hazmat		
1 engine company staffed with 3 personnel.		
Apparatus	Critical Task	Minimum Personnel
1 <sup>st</sup> Engine	Command/Safety/Communications	1
	Spill Containment	2
	Total ERF	3
Moderate Risk Hazmat		

1<sup>st</sup> Alarm - 1 command vehicle staffed with 1 person, 1 engine company cross staffed with a Hazmat vehicle with 3 personnel, 3 engine companies staffed with 3 personnel, and 1 truck company staffed with 3 personnel.

Apparatus	Critical Task	<b>Minimum Personnel</b>
1st Batt. Chief	Command/Safety/Communications	1
1 <sup>st</sup> Engine	Team Leader/Resource Officer/Safety	3
1 <sup>st</sup> Trk & 2 <sup>nd</sup> Engine	Monitoring/Recon	4
2 <sup>nd</sup> Engine & 3 <sup>rd</sup>	Entry Team/Incident	
Engine	Mitigation/Containment	4
4 <sup>th</sup> Engine & 5 <sup>th</sup>		
Engine	Decontamination	4
	Total ERF	16

# **High Risk Hazmat**

1<sup>st</sup> Alarm - 1 command vehicle staffed with 1 person, 1 engine company cross staffed with a HazMat vehicle with 3 personnel, 3 engine companies staffed with 3 personnel, and 1 truck company staffed with 3 personnel. 2<sup>nd</sup> Alarm – 2<sup>nd</sup> command vehicle staffed with 1 person and 5<sup>th</sup> engine staffed with 3 personnel. 3<sup>rd</sup> Alarm – 6<sup>th</sup> engine company staffed with 3 personnel.

Apparatus	Critical Task	Minimum Personnel
1st Batt. Chief	Command/Communications	1
	Team Leader/Resource	
1 <sup>st</sup> Engine	Officer/Safety	3
2 <sup>nd</sup> Engine/Hazmat & 3rd		
Engine	Monitoring/Recon	6
	Entry Team/Incident	
1 <sup>st</sup> Truck & 4 <sup>th</sup> Engine	Mitigation/Containment/Back-up	6
5 <sup>th</sup> & 6th Engine	Decontamination	6
2 <sup>nd</sup> Batt. Chief	Safety	1
	Total ERF	23

	Low Risk Wildland Fires								
1 engine company s	1 engine company staffed with 3 personnel.								
Apparatus	Critical Task	Minimum Personnel							
	Command/Safety/Communications/Lookou								
1 <sup>st</sup> Engine	t	1							
1 <sup>st</sup> Engine	Pump Operator	1							
1 <sup>st</sup> Engine	Attack Line	1							
	Total ERF	3							

#### **Moderate Risk Wildland Fires**

1<sup>st</sup> Alarm - 1 command vehicle staffed with 1 person, 2 engine companies crossed-staffed with 2 Type 6 engines with 3 personnel each, 2 engines staffed with 3 personnel each, and 1 truck company staffed with 3 personnel.

Apparatus	Critical Task	Minimum Personnel
1st Batt. Chief	Command/Safety/Communications	1
1 <sup>st</sup> Engine and Type 6	Driver	1
1 <sup>st</sup> Engine and Type 6	Pump Operator and Attack Line	2
2 <sup>nd</sup> Engine and Type 6	Driver	1
2 <sup>nd</sup> Engine and Type 6	Pump Operator and Attack Line	2
1 <sup>st</sup> Truck	Evacuation/Perimeter Control/Lookout	3
3 <sup>rd</sup> Engine and 4 <sup>th</sup> Engine	Water Supply	6
	Total ERF	16

# **High Risk Wildland Fires**

1<sup>st</sup> Alarm - 1 command vehicle staffed with 1 person, 2 engine companies crossed staffed with 2 Type 6 engines with 3 personnel each, 2 engines staffed with 3 personnel each, and 1 truck company staffed with 3 personnel. 2<sup>nd</sup> Alarm – 2<sup>nd</sup> command vehicle staffed with 1 person and 5<sup>th</sup> engine staffed with 3 personnel. 3<sup>rd</sup> Alarm – 6<sup>th</sup> engine company staffed with 3 personnel.

Apparatus	Critical Task	Minimum Personnel
1 <sup>st</sup> Batt. Chief	Command/Communications	1
1 <sup>st</sup> Engine and Type 6	Driver	1
1 <sup>st</sup> Engine and Type 6	Pump Operator and Attack Line	2
2 <sup>nd</sup> Engine and Type 6	Driver	1
2 <sup>nd</sup> Engine and Type 6	Pump Operator and Attack Line	2
1 <sup>st</sup> Truck	Evacuation/Perimeter Control/Lookout	3
3 <sup>rd</sup> and 4 <sup>th</sup> Engine	Water Supply	6
5 <sup>th</sup> and 6 <sup>th</sup> Engine	Hot spots/Exposure Control	6
2 <sup>nd</sup> Batt. Chief Safety		1
	Total ERF	23

# **Performance Objectives (Benchmark Statements)**

Performance objectives outline the goals and desired response times for various types of emergencies. The FFD compiles performance data in two ways; the first is based on the entire primary service area, the second is by individual planning zones. Benchmark response time objectives for emergency calls for service have been set to correspond with National Fire Protection Association (NFPA) Standards 1710 (2020 edition) and 1221 (2019 edition). Baseline performance is derived from the 90<sup>th</sup> percentile (out of 100 events, the time data for the 90<sup>th</sup> event is provided) of the most recently available performance data. These times are compiled from three measurable components.

- Alarm handling time the time from a 9-1-1 call being answered to the time FFD resources are dispatched
- Turnout time the time from dispatching FFD resources to the time those resources are enroute to the scene
- Travel time the time from FFD resources going enroute to the time those resources arrive on scene

The combination of alarm handling, turnout and travel times comprises the total response time. The following are the performance objects the FFD has set for low, moderate and high-risk events.

#### **Fires**

## Fire (low risk)

Benchmark Statement: For low risk fires, a single FFD apparatus response with a minimum of three personnel shall arrive within 6 minutes 20 seconds total response time 90% of the time. The first due unit will include an apparatus with a minimum 1250 gallon per minute pump capacity and 500 gallons of water. The first due unit will be capable to establish incident command, request additional resources as necessary, monitor scene safety, establish communications, operate the fire pump, and operate an attack line capable of extinguishing vehicle, refuse, and small outbuilding fires. All operations conducted on scene will be in accordance with established FFD policies and operating guidelines.

#### Fire (moderate risk)

Benchmark Statement: For moderate risk fires, the first due FFD apparatus will respond with a minimum of three personnel and shall arrive within 6 minutes 20 seconds total response time 90% of the time. The first due unit will include an apparatus with a minimum 1250 gallon per minute pump capacity and 500 gallons of water. The first due unit will be capable to establish incident command, monitor scene safety, establish communications, request additional resources, rescue victims, operate the fire pump, and operate an attack line capable of containing a fire.

An effective response force (ERF) of 16 personnel shall arrive within 10 minutes 20 seconds total response time 90% of the time. The ERF will be able to conduct search and rescue operations, supply water, perform ventilation, put additional fire attack lines into operation, and establish a rapid intervention crew. The ERF on scene will comprise a first alarm assignment and be able to control working fires in structures. All operations conducted on scene will be in accordance with established FFD policies and operating guidelines.

## Fire (high risk)

Benchmark Statement: For high risk fires, the first due FFD apparatus will respond with a minimum of three personnel and shall arrive within 6 minutes 20 seconds total response time 90% of the time. The first due unit will include an apparatus with a minimum 1250 gallon per minute pump capacity and 500 gallons of water. The first due unit will be capable to establish incident command, monitor scene safety, establish communications, request additional resources, rescue victims, operate the fire pump, and operate an attack line capable of containing a fire.

An effective response force (ERF) of 23 personnel shall arrive within 12 minutes 30 seconds total response time 90% of the time. The ERF will be able to conduct search and rescue operations, supply water, perform ventilation, put additional fire attack lines into operation, provide a safety officer and establish a rapid intervention crew. The ERF on scene will consist of a first alarm, a second alarm, and the next company beyond a second alarm response. It will be able to control working fires in structures. All operations conducted on scene will be in accordance with established FFD policies and operating guidelines.

#### **EMS**

# EMS (low risk)

Benchmark Statement: For low risk EMS incidents, a single FFD apparatus response with a minimum of three personnel shall arrive within 6 minutes total response time 90% of the time. The first due unit shall be able to establish incident command, assess scene safety, establish communications, perform a patient assessment, and initiate interventions which include AED use, airway management, oxygen therapy, and chest compressions. All operations conducted on scene will be in accordance with established FFD policies and operating guidelines.

\*The FFD relies upon Sanford Ambulance (SA) to complete the effective response force (ERF) component for all EMS response, provide ALS service, and transport the patient.

## EMS (moderate risk)

Benchmark Statement: For moderate risk EMS incidents, the first due FFD apparatus will respond with a minimum of three personnel and shall arrive within 6 minutes total response time 90% of the time. The first due unit shall be able to establish incident command, assess scene safety, establish communications, perform a patient assessment, and initiate interventions which include AED use, airway management, oxygen therapy, and chest compressions.

An effective response force (ERF) of 10 personnel will arrive within 10 minutes 20 seconds total response time 90% of the time, and in addition to the tasks above, be capable to control motor vehicle accidents requiring extrication, or be capable to treat additional patients. All operations conducted on scene will be in accordance with established FFD policies and operating guidelines.

### EMS (high risk)

Benchmark Statement: For high risk EMS incidents, the first due FFD apparatus will respond with a minimum of three personnel and shall arrive within 6 minutes total response time 90% of the time. The first due unit shall be able to establish incident command, assess scene safety, establish communications, perform a patient assessment, and initiate interventions which include AED use, airway management, oxygen therapy, and chest compressions.

An ERF of 23 personnel will be capable to mitigate a mass casualty incident and will respond within 12 minutes 30 seconds total response time 90% of the time. The ERF will consist of a first alarm, a second alarm, and the next company beyond a second alarm assignment. All operations conducted on scene will be in accordance with established FFD policies and operating guidelines.

## **Technical Rescue**

#### **Technical Rescue (low risk)**

Benchmark Statement: For low risk technical rescue incidents, a single FFD apparatus will respond with a minimum of three personnel and shall arrive within 6 minutes 20 seconds total response time 90% of the time. The first due unit will include an apparatus with capabilities to establish incident command, monitor scene safety, establish communications, request additional resources, and conduct an elevator rescue or simple extrication. All operations conducted on scene will be in accordance with established FFD policies and operating guidelines.

#### **Technical Rescue (moderate risk)**

<u>Benchmark Statement:</u> For moderate risk technical rescue incidents, the first due FFD apparatus will respond with a minimum of three personnel and shall arrive within 6 minutes 20 seconds total response time 90% of the time. The first due unit will include an apparatus with capabilities to establish incident command, monitor scene safety, establish communications, request additional resources, and conduct an elevator rescue or simple extrication.

An effective response force (ERF) of 16 personnel shall arrive within 10 minutes 20 seconds total response time 90% of the time. The ERF will comprise a first alarm assignment, and include either the technical rescue truck, 856, an FFD boat, or ice rescue equipment. Personnel will be able to conduct rescue operations that include rope, trench, confined space, structural collapse, or water/ice rescue. All operations conducted on scene will be in accordance with established FFD policies and operating guidelines.

### **Technical Rescue (high risk)**

<u>Benchmark Statement:</u> For high risk technical rescue incidents, the first due FFD apparatus will respond with a minimum of three personnel and shall arrive within 6 minutes 20 seconds total response time 90% of the time. The first due unit will include an apparatus with capabilities to establish incident command, monitor scene safety, establish communications, request additional resources, and conduct an elevator rescue or simple extrication.

An effective response force (ERF) of 23 personnel shall arrive within 12 minutes 30 seconds total response time 90% of the time. The ERF will consist of a first alarm, a second alarm, and the next company beyond a second alarm assignment. It will include either the technical rescue truck, 856, an FFD boat, or ice rescue equipment. Personnel will be able to conduct rescue operations that include rope, trench, confined space, structural collapse, or water/ice rescue. Operations will include significant technical issues or large-scale operations as might occur during a natural disaster. All operations conducted on scene will be in accordance with established FFD policies and operating guidelines.

# **HazMat (Hazardous Materials)**

#### **Hazardous Material (low risk)**

Benchmark Statement: For low risk hazardous materials (HazMat) events, a single FFD apparatus will respond with a minimum of three personnel shall arrive within 6 minutes 20 seconds total response time 90% of the time. The first due unit shall be able to establish incident command, monitor scene safety, establish communications, and contain a small, non-life-threatening spill of less than 5 gallons or otherwise mitigate the hazmat incident. Personnel will be trained to a minimum of HazMat Operations level and recognize the need for additional resources. All operations conducted on scene will be in accordance with established FFD policies and operating guidelines.

#### **Hazardous Materials (moderate risk)**

<u>Benchmark Statement:</u> For moderate risk hazardous materials (HazMat) events, the first due FFD apparatus will respond with a minimum of three personnel and shall arrive within 6 minutes

20 seconds total response time 90% of the time. The first due unit shall be able to establish incident command, monitor scene safety, establish communications, and request additional resources. Personnel will be trained to a minimum of HazMat Operations level and recognize the need for additional resources.

An effective response force (ERF) of 16 personnel shall arrive within 10 minutes 20 seconds total response time 90% of the time. The ERF will comprise a first alarm assignment, include Engine 807 cross staffed with the HazMat truck, 857, and personnel trained to the HazMat tech level that are able to act as a team leader, science officer, decontamination officer, and safety officer. They will be able to recon the scene, use HazMat monitors, enter the scene, rescue victims, control a spill or leak, perform decontamination operations, and minimize environmental hazards. All operations conducted on scene will be in accordance with established FFD policies and operating guidelines.

## **Hazardous Materials (high risk)**

Benchmark Statement: For high risk hazardous materials (HazMat) events, the first due FFD apparatus will respond with a minimum of three personnel and shall arrive within 6 minutes 20 seconds total response time 90% of the time. The first due unit shall be able to establish incident command, monitor scene safety, establish communications, and request additional resources. Personnel will be trained to a minimum of HazMat Operations level and recognize the need for additional resources.

An effective response force (ERF) of 23 personnel shall arrive within 12 minutes 30 seconds total response time 90% of the time. The ERF will consist of a first alarm, a second alarm, and the next company beyond a second alarm assignment. It will include Engine 807 cross staffed with the HazMat truck, 857, and personnel trained to the HazMat tech level that are able to act as a team leader, science officer, decontamination officer, and safety officer. They will be able to recon the scene, use HazMat monitors, enter the scene, rescue victims, control a spill or leak, perform decontamination operations, and minimize environmental hazards. All operations conducted on scene will be in accordance with established FFD policies and operating guidelines.

## Wildland Fires

#### Wildland Fires (low risk)

Benchmark Statement: For low risk vegetation fires, a single FFD apparatus response with a minimum of three personnel shall arrive within 6 minutes 20 seconds total response time 90% of the time. The first due unit will include an apparatus with a minimum 1250 gallon per minute pump capacity and 500 gallons of water. The first due unit will be capable to establish incident command, request additional resources as necessary, monitor scene safety, establish communications, operate the fire pump, and operate an attack line capable of extinguishing small wildland fires. All operations conducted on scene will be in accordance with established FFD policies and operating guidelines.

#### Wildland Fires (moderate risk)

Benchmark Statement: For moderate risk wildland fires, the first due FFD apparatus will respond with a minimum of three personnel and shall arrive within 6 minutes 20 seconds total response time 90% of the time. The first due unit will be capable to establish incident command, request additional resources as necessary, monitor scene safety, establish communications, operate the fire pump, and operate an attack line capable of beginning attack on wildland fires.

An effective response force (ERF) of 16 personnel shall arrive within 10 minutes and 20 seconds total response time 90% of the time. The ERF will include two crossed staffed Type 6 engines, "grass rigs," and be able to put additional fire attack lines into operation, operate the Type 6 engine off road, and protect exposures. The ERF on scene will comprise a first alarm assignment, and be able to control moderate risk wildland fires. All operations conducted on scene will be in accordance with established FFD policies and operating guidelines.

## Wildland Fires (high risk)

<u>Benchmark Statement:</u> For high risk wildland fires, the first due FFD apparatus will respond with a minimum of three personnel and shall arrive within 6 minutes 20 seconds total response time 90% of the time. The first due unit will be capable to establish incident command, request

additional resources as necessary, monitor scene safety, establish communications, operate the fire pump, and operate an attack line capable of beginning attack on high risk wildland fires.

An effective response force (ERF) of 23 personnel shall arrive within 12 minutes 30 seconds total response time 90% of the time. The ERF will be able to supply water, put additional fire attack lines into operation, and provide a safety officer. The ERF on scene will consist of a first alarm, a second alarm, and the next company beyond a second alarm assignment. It will be able to control high risk wildland fires, and be able to protect exposures. All operations conducted on scene will be in accordance with established FFD policies and operating guidelines.

# **Response Time Performance**

With the performance objectives defined, it is important to determine whether or not these objectives are being met. This is done by analyzing response time data. To assist with calculating these measurements the computer software StatsFD is used. This software takes data from the current record management system (RMS) and performs calculations that show the 90<sup>th</sup> percentile of performance (out of 100 events, the time data for the 90<sup>th</sup> event is provided). The performance measures stated in the above performance objective section represents total response time. This time is a combination of alarm handling time, turnout time, and travel time. Distribution is a measure of the first due apparatus, concentration is a measure of the effective response force.

### Impacts on Response Time Performance

There are occasionally outside factors that can impact response time performance. These factors are always part of the calculations and not used as an excuse for performance, but rather to give background to assist with identifying and addressing the issues. This can also assist when data fluctuations don't make sense because it may help explain the causes of the fluctuations. The following table contains factors that may have impacted response time performance.

2020			
2021			
2022	High number of severe		
	winter snow and blizzards		
2023	High number of severe	PZ 2 road construction	
	winter snow and blizzards	project near station shut	
	(194 and I 29 closed 10	down primary artery	
	times)	route near station 2	
2024	Temporary relocation of		
	St. 5 to WFFD Sta. 76		
	during the St. 5 repair		
	process.		

# **Alarm Handling**

The FFD uses NFPA Standard 1221 (2019) as a guideline to determine alarm handling benchmark times. The NFPA 1221 standard of 60 seconds 90% of the time is used for all calls at the highest prioritization level, including:

- Trauma
- Neurologic emergencies (stroke, seizure)
- Cardiac related events
- Unconscious/unresponsive patients
- Allergic reactions
- Patient not breathing
- Choking
- Fire
- Explosion
- Other calls as determined by the AHJ

Calls that differ from the above time requirements include:

- Joint responses with law enforcement
- HazMat
- TRT
- Disaster mode

For these calls, a time standard is not set in NFPA 1221, but the FFD has had a historical requirement of 90 seconds 90% of the time and 120 seconds 99% of the time.

Alarm Handling (All Incidents) - 90th Percentile Times Baseline Performance	2020- 2024	2024	2023	2022	2021	2020
Alarm Handling	2:19	2:33	2:34	2:24	1:51	2:04

**Table 31: Alarm Handling History** 

### **Turnout Time**

The FFD uses NFPA 1710 (2020) as a guide for setting benchmark performance for turnout times. A turnout time of 60 seconds 90% of the time is set as a minimum baseline performance standard for EMS calls. A turnout time of 80 seconds 90% of the time is set as a minimum baseline performance standard for fire incidents.

Turnout Time (All Incidents) - 90th Percentile Times Baseline Performance	2020- 2024	2024	2023	2022	2021	2020
Turnout Time	1:15	1:11	1:13	1:16	1:17	1:18

**Table 32: Turnout Time History** 

## **Travel Time**

The FFD does not respond emergent (lights and siren) to all call types. Calls for service such as carbon monoxide detector activations with no symptoms of illness, lift assists, police assists, outdoor odor investigations, citizen complaints, and alarm resets are examples where an emergent response is not warranted. There are certain call types that dictate the initial arriving apparatus respond emergent, but others do not. For example, calls for alarm activations with no sign of smoke or fire in the building. The primary engine responds emergent while remaining responding apparatus respond non-emergent (no lights or siren). If the first arriving resource finds an indication that an emergency may be present (multiple alarm activations, odor of smoke, sprinkler activation etc.), then the remaining responding apparatus are upgraded to an emergent response at that time. Because of the wide variety and severity of call types to which the FFD responds, there are incidents where it is at the discretion of the officer in charge whether or not to respond emergent. For the purpose of tracking travel time, only apparatus with an initial and continuous emergent response to their arrival on scene are analyzed.

The FFD chooses to use NFPA 1710 (2020) to establish benchmark performance objectives for travel time. 240 seconds (4:00 minutes) travel time 90% of the time for the first arriving unit and 480 seconds (8:00 minutes) travel for the effective response force (ERF) 90% of the time is the benchmark set by the FFD for travel time. Table 33 shows department wide baseline performance for travel time for the first arriving unit and ERF. This data represents all types of responses and represents apparatus that responded emergent and arrived on scene for the last five years. It also shows travel times excluding PZ 8, 9 and 10 where the FFD currently does not have any permanent fire stations or fixed assets in place.

Travel Time (All Incidents) - 90th Percentile Times Baseline Performance	2020- 2024	2024	2023	2022	2021	2020
Travel Time 1st Unit	5:46	5:56	5:49	5:53	5:34	5:38
Travel Time 1st Unit (excluding PZ 8, 9& 10)	5:32	5:43	5:32	5:39	5:23	5:25

**Table 33: Travel Time History** 

# **Total Response Time**

The following is the current FFD performance for total response time department wide. The calculations represent apparatus that responded emergent and arrived on scene. The department wide measurements include all incidents where units went emergent and therefore contains many runs not categorized in the more specific measurement groups, such as EMS or Structure Fires. This larger sampling allows for a more confident analysis. Table 34 shows the total response times for the last five years.

Total Response Time (All Incidents) - 90th Percentile Times Baseline Performance	2020- 2024	2024	2023	2022	2021	2020
Total Response Time 1st Unit	8:17	8:39	8:37	8:20	7:30	7:57
Total Response Time 1st Unit	8:02	8:27	8:21	8:07	7:19	7:44
(excluding PZ 8, 9 & 10)	n=29,663	n=5876	n=6408	n=5696	n=5869	n=5814

**Table 34: Total Response Time History** 

# **Response Time Performance by Incident Type**

Some portions of the following tables are listed as "not applicable" (NA). This is due to various data sets that are either insufficient or of zero value. For example; single engine responses result in the first arriving unit comprising the entirety of the ERF. Recording ERF times for these incidents is redundant and would also skew department wide data when analyzing ERF times for

"All Incidents," resulting in artificially low times. Some incidents such as TRT or Water/Ice Rescue have an insufficient volume of calls to produce a usable sampling or a low enough call volume where a single incident could have an overweight impact on the overall averages. In these situations, times will vary wildly and have no practical application in assessing overall performance.

,	(Low Risk) Fire Suppression - 90th Percentile Times - Baseline Performance		Benchmark (Target)	2020- 2024	2024	2023	2022	2021	2020
Alarm	Pick-up to	Urban		1:57	2:12	2:30	1:30	1:28	1:47
Handling	Dispatch	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Turnout	Turnout Time	Urban		1:16	1:11	1:18	1:17	1:19	1:16
Time	1st Unit	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Travel Time 1st Unit Distribution	Urban		5:10	4:58	5:20	5:06	5:10	5:09
Travel		Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Time	Travel Time ERF Concentration	Urban		5:10	4:58	5:20	5:06	5:10	5:09
		Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Total	Urban		7:32	8:12	7:48	7:10	6:53	7:32
	Response Time 1st Unit	Orban	6:20	n=421	n=73	n=108	n=85	n=74	n=81
	on Scene	D1		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Total Response	Distribution	Rural		n=XXX	n=XXX	n=XXX	n=XXX	n=XXX	n=XXX
Time	Total	l luban		7:32	8:12	7:48	7:10	6:53	7:32
	Response	Urban	6:20	n=421	n=73	n=108	n=85	n=74	n=81
	Time ERF	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Concentration	Nurai		n=XXX	n=XXX	n=XXX	n=XXX	n=XXX	n=XXX

(Moderate Risk) Fire Suppression - 90th Percentile Times - Baseline Performance		Benchmark (Target)	2020- 2024	2024	2023	2022	2021	2020	
Alarm Handling	Pick-up to	Urban		1:43	1:46	1:58	1:32	1:23	1:43
	Dispatch	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Turnout Time 1st Unit	Urban		1:23	1:32	1:18	1:25	1:24	1:21
Time	1St Offit	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Travel Time 1st Unit Distribution	Urban		4:55	4:58	4:45	5:06	4:57	4:57
Travel		Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Time	Travel Time ERF Concentration	Urban		12:29	11:48	11:08	12:29	11:49	13:56
		Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Total	Urban		6:53	7:35	7:04	6:46	6:30	7:09
	Response	Orban	6:20	n=329	n=69	n=60	n=74	n=60	n=66
	Time 1st Unit on Scene	Demail		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Total Response	Distribution	Rural		n=XXX	n=XXX	n=XXX	n=XXX	n=XXX	n=XXX
Time	Total	Urban		13:18	13:00	12:34	13:32	11:57	14:00
	Response	Ulball	10:20	n=125	n=26	n=24	n=30	n=21	n=24
	Time ERF	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Concentration			n=XXX	n=XXX	n=XXX	n=XXX	n=XXX	n=XXX

	) Fire Suppressio ntile Times - Base Performance		Benchmark (Target)	2020- 2024	2024	2023	2022	2021	2020
Alarm	Pick-up to	Urban		1:31	2:38	1:08	1:38	1:32	1:27
Handling	Dispatch	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Turnout Time	Turnout Time 1st Unit	Urban		1:28	1:38	1:31	1:28	1:36	1:20
rime	1St Offit	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Travel Time 1st Unit Distribution	Urban		4:21	2:37	NA	3:58	3:28	5:25
Travel		Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Time	Travel Time ERF Concentration	Urban		24:24	22:17	NA	NA	18:10	24:24
		Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Total	l luba a		6:34	3:50	NA	7:37	5:52	6:34
	Response	Urban	6:20	n=27	n=2	n=0	n=4	n=4	n=17
_	Time 1st Unit on Scene			mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Total Response	Distribution	Rural		n=XXX	n=XXX	n=XXX	n=XXX	n=XXX	n=XXX
Time	Total	l luban		26:38	NA	NA	NA	18:30	26:38
	Response	Urban	12:30	n=4	n=0	n=0	n=0	n=1	n=3
	Time ERF	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Concentration	Marai		n=XXX	n=XXX	n=XXX	n=XXX	n=XXX	n=XXX

•	(Low Risk) EMS - 90th Percentile Times - Baseline Performance			2020- 2024	2024	2023	2022	2021	2020
Alarm	Pick-up to	Urban		2:27	2:45	2:45	2:36	1:59	2:04
Handling	Dispatch	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Turnout	Turnout Time	Urban		1:13	1:07	1:10	1:13	1:15	1:17
Time	1st Unit	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Travel Time 1st Unit Distribution	Urban		5:53	6:08	5:58	5:59	5:35	5:42
Travel		Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Time	Travel Time ERF Concentration	Urban		5:53	6:08	5:58	5:59	5:35	5:42
		Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Total			8:23	8:51	8:44	8:28	7:34	8:02
	Response	Urban	6:00	n=20,219	n=3994	n=4252	n=3913	n=4064	n=3996
	Time 1st Unit on Scene			mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Total Response	Distribution	Rural		n=XXX	n=XXX	n=XXX	n=XXX	n=XXX	n=XXX
Response Time	Total	Urban		8:23	8:51	8:44	8:28	7:34	8:02
	Response	Ulball	6:00	n=20,219	n=3994	n=4252	n=3913	n=4064	n=3996
	Time ERF Concentration	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
		Nurai		n=XXX	n=XXX	n=XXX	n=XXX	n=XXX	n=XXX

•	(Moderate Risk) EMS - 90th Percentile Times - Baseline Performance			2020- 2024	2024	2023	2022	2021	2020
Alarm	Pick-up to	Urban		2:10	2:21	2:34	2:09	1:41	1:59
Handling	Dispatch	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Turnout	Turnout Time	Urban		1:17	1:16	1:17	1:17	1:18	1:16
Time	1st Unit	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Travel Time 1st Unit Distribution	Urban		5:17	5:03	5:19	5:30	5:20	4:49
Travel		Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Time	Travel Time ERF Concentration	Urban		9:01	8:30	11:40	9:32	9:54	8:32
		Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Total	Urban		7:56	8:21	8:14	7:28	7:21	7:32
	Response Time 1st Unit	Orban	6:00	n=945	n=241	n=188	n=192	n=190	n=134
	on Scene	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Total Response Time	Distribution	Rurai		n=XXX	n=XXX	n=XXX	n=XXX	n=XXX	n=XXX
	Total	Urban		10:48	10:38	14:10	10:55	10:41	10:01
	Response Time ERF Concentration	Orbail	10:00	n=288	n=81	n=47	n=61	n=57	n=42
		Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
		1 1 2 1 2 1 7		n=XXX	n=XXX	n=XXX	n=XXX	n=XXX	n=XXX

(High Risk) EMS - 90th Percentile Times - Baseline Performance			Benchmark (Target)	2020- 2024	2024	2023	2022	2021	2020	
Alarm	Pick-up to	Urban		NA	NA	NA	NA	NA	NA	
Handling	Dispatch	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	
Turnout	Turnout Time	Urban		NA	NA	NA	NA	NA	NA	
Time	1st Unit	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	
	Travel Time 1st Unit Distribution	Urban		NA	NA	NA	NA	NA	NA	
Travel		Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	
Time	Travel Time ERF Concentration	Urban		NA	NA	NA	NA	NA	NA	
		Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	
	Total Response	Urban		NA	NA	NA	NA	NA	NA	
	Time 1st Unit	Orban	6:00	n=0	n=0	n=0	n=0	n=0	n=0	
	on Scene	D1		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	
	Distribution	Rural		n=XXX	n=XXX	n=XXX	n=XXX	n=XXX	n=XXX	
		Urban		NA	NA	NA	NA	NA	NA	
	Total Response Time ERF	Ulbail	12:10	n=0	n=0	n=0	n=0	n=0	n=0	
	Concentration	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	
		concentration	Concentration			n=XXX	n=XXX	n=XXX	n=XXX	n=XXX

(Low Risk) Technical Rescue - 90th Percentile Times - Baseline Performance			Benchmark (Target)	2020-2024	2024	2023	2022	2021	2020
Alarm	Pick-up to	Urban		1:38	1:58	2:11	1:27	1:11	1:38
Handling	Dispatch	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Turnout	Turnout Time	Urban		1:07	1:07	1:10	1:04	1:09	1:09
Time	1st Unit	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Travel Time 1st Unit Distribution	Urban		6:52	4:51	3:47	10:42	6:52	3:30
Travel		Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Time	Travel Time ERF Concentration	Urban		6:52	4:51	3:47	10:42	6:52	3:30
		Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Total	Urban		8:24	6:57	6:35	12:30	8:24	6:27
	Response	Olbali	6:20	n=16	n=4	n=4	n=4	n=2	n=2
	Time 1st Unit on Scene			mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Total Response Time	Distribution	Rural		n=XXX	n=XXX	n=XXX	n=XXX	n=XXX	n=XXX
	Total	Urban		8:24	6:57	6:35	12:30	8:24	6:27
	Response	Ulbail	6:20	n=16	n=4	n=4	n=4	n=2	n=2
	Time ERF Concentration	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
		Nuiai		n=XXX	n=XXX	n=XXX	n=XXX	n=XXX	n=XXX

(Moderate Risk) Technical Rescue - 90th Percentile Times - Baseline Performance			Benchmark (Target)	2020-2024	2024	2023	2022	2021	2020
Alarm	Pick-up to	Urban		2:47	3:01	1:48	2:47	1:48	3:22
Handling	Dispatch	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Turnout Time	Turnout Time 1st Unit	Urban		1:37	1:39	3:06	1:05	1:37	1:30
rime	1St Offit	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Travel Time 1st Unit Distribution	Urban		5:29	7:35	4:06	5:26	9:07	NA
Travel		Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Time	Travel Time ERF Concentration	Urban		NA	NA	NA	NA	NA	NA
		Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Total	11.4		10:58	10:58	6:39	9:15	16:52	NA
	Response	Urban	6:20	n=21	n=9	n=4	n=2	n=6	n=0
	Time 1st Unit on Scene			mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Total Response	Distribution	Rural		n=XXX	n=XXX	n=XXX	n=XXX	n=XXX	n=XXX
Time	Total	Urban		NA	NA	NA	NA	NA	NA
	Response	Olbail	10:20	n=0	n=0	n=0	n=0	n=0	n=0
	Time ERF	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Concentration	Nulai		n=XXX	n=XXX	n=XXX	n=XXX	n=XXX	n=XXX

	) Technical Rescu ntile Times - Base Performance		Benchmark (Target)	2020-2024	2024	2023	2022	2021	2020
Alarm	Pick-up to	Urban		0:56	NA	NA	0:30	NA	0:56
Handling	Dispatch	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Turnout	Turnout Time	Urban		1:28	NA	NA	0:58	NA	1:28
Time	1st Unit	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Travel Time 1st Unit Distribution	Urban		2:37	NA	NA	2:37	NA	1:12
Travel		Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Time	Travel Time ERF Concentration	Urban		NA	NA	NA	NA	NA	NA
		Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Total	I I ale e a		3:57	NA	NA	3:57	NA	2:21
	Response	Urban	6:20	n=2	n=0	n=0	n=1	n=0	n=1
_	Time 1st Unit on Scene			mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Total Response Time	Distribution	Rural		n=XXX	n=XXX	n=XXX	n=XXX	n=XXX	n=XXX
	Total	Urban		NA	NA	NA	NA	NA	NA
	Response	Olbail	12:30	n=0	n=0	n=0	n=0	n=0	n=0
	Time ERF	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Concentration	Nulai		n=XXX	n=XXX	n=XXX	n=XXX	n=XXX	n=XXX

•	Hazmat - 90th P Baseline Perforr		Benchmark (Target)	2020-2024	2024	2023	2022	2021	2020
Alarm	Pick-up to	Urban		1:48	1:59	2:06	1:38	1:21	1:53
Handling	Dispatch	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Turnout	Turnout Time	Urban		1:18	1:13	1:16	1:19	1:25	1:21
Time	1st Unit	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Travel Time 1st Unit Distribution	Urban		7:19	6:45	6:02	10:05	6:10	5:43
Travel		Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Time	Travel Time ERF Concentration	Urban		7:19	6:45	6:02	10:05	6:10	5:43
		Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Total			9:26	8:50	8:56	13:00	8:17	9:18
	Response	Urban	6:20	n=97	n=11	n=26	n=23	n=23	n=14
	Time 1st Unit on Scene			mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Total Response	Distribution	Rural		n=XXX	n=XXX	n=XXX	n=XXX	n=XXX	n=XXX
Time	Total	Urban		9:26	8:50	8:56	13:00	8:17	9:18
	Response	Orbail	6:20	n=97	n=11	n=26	n=23	n=23	n=14
	Time ERF	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Concentration	Rarar		n=XXX	n=XXX	n=XXX	n=XXX	n=XXX	n=XXX

•	ate Risk) Hazmat ntile Times - Base Performance		Benchmark (Target)	2020-2024	2024	2023	2022	2021	2020
Alarm	Pick-up to	Urban		2:04	2:09	2:01	1:58	1:31	2:15
Handling	Dispatch	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Turnout	Turnout Time	Urban		1:20	1:14	1:17	1:23	1:18	1:27
Time	1st Unit	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Travel Time 1st Unit Distribution	Urban		5:21	5:53	5:36	4:39	4:56	4:41
Travel		Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Time	Travel Time ERF Concentration	Urban		12:40	11:30	13:57	14:00	12:40	12:05
		Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Total	Lluban		7:34	8:16	7:27	6:40	6:52	7:34
	Response	Urban	6:20	n=270	n=53	n=67	n=50	n=52	n=48
	Time 1st Unit on Scene			mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Time	Distribution	Rural		n=XXX	n=XXX	n=XXX	n=XXX	n=XXX	n=XXX
	Total	Urban		14:41	12:59	15:46	15:11	13:56	14:41
	Response	Orban	10:20	n=58	n=18	n=16	n=14	n=6	n=11
	Time ERF Concentration	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
		Nurai		n=XXX	n=XXX	n=XXX	n=XXX	n=XXX	n=XXX

	Risk) Hazmat - 9 ntile Times - Base Performance		Benchmark (Target)	2020-2024	2024	2023	2022	2021	2020
Alarm	Pick-up to	Urban		3:07	NA	NA	NA	3:07	NA
Handling	Dispatch	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Turnout	Turnout Time	Urban		0:52	NA	NA	NA	0:52	NA
Time	1st Unit	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Travel Time 1st Unit Distribution	Urban		2:57	NA	NA	NA	2:57	NA
Travel		Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Time	Travel Time ERF Concentration	Urban		NA	NA	NA	NA	NA	NA
		Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Total	I I sele e se		6:56	NA	NA	NA	6:56	NA
	Response	Urban	6:20	n=1	n=0	n=0	n=0	n=1	n=0
	Time 1st Unit on Scene			mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Total Response	Distribution	Rural		n=XXX	n=XXX	n=XXX	n=XXX	n=XXX	n=XXX
Time	Total	Urban		NA	NA	NA	NA	NA	NA
Time	Response	Ulball	12:30	n=0	n=0	n=0	n=0	n=0	n=0
	Time ERF	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Concentration	Nuiai		n=XXX	n=XXX	n=XXX	n=XXX	n=XXX	n=XXX

•	Risk) Wildland - 9 ntile Times - Baso Performance		Benchmark (Target)	2020-2024	2024	2023	2022	2021	2020
Alarm	Pick-up to	Urban		2:04	NA	1:08	NA	1:18	2:04
Handling	Dispatch	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Turnout	Turnout Time	Urban		1:10	NA	1:10	NA	0:59	0:58
Time	1st Unit	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Travel Time 1st Unit Distribution	Urban		5:14	NA	3:00	NA	NA	5:14
Travel		Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Time	Travel Time ERF Concentration	Urban		5:14	NA	3:00	NA	NA	5:14
		Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Total			7:38	NA	5:18	NA	NA	7:38
	Response	Urban	6:20	n=3	n=0	n=1	n=0	n=0	n=2
	Time 1st Unit on Scene			mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Total Response	Distribution	Rural		n=XXX	n=XXX	n=XXX	n=XXX	n=XXX	n=XXX
Time	Total	Urban		7:38	NA	5:18	NA	NA	7:38
	Response	Olbail	6:20	n=3	n=0	n=1	n=0	n=0	n=2
	Time ERF	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Concentration	Nuiai		n=XXX	n=XXX	n=XXX	n=XXX	n=XXX	n=XXX

•	te Risk) Wildland ntile Times - Base Performance		Benchmark (Target)	2020-2024	2024	2023	2022	2021	2020
Alarm	Pick-up to	Urban		2:10	1:13	2:38	2:04	1:34	3:20
Handling	Dispatch	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Turnout	Turnout Time	Urban		1:35	1:11	2:00	1:13	3:27	1:29
Time	1st Unit	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Travel Time 1st Unit Distribution	Urban		4:42	3:35	3:57	4:15	5:12	6:03
Travel		Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Time	Travel Time ERF Concentration	Urban		8:49	NA	NA	NA	NA	8:49
		Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Total	محطوا		6:56	5:03	6:56	5:32	6:37	10:06
	Response	Urban	6:20	n=22	n=4	n=6	n=3	n=5	n=4
	Time 1st Unit on Scene			mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Total Response	Distribution	Rural		n=XXX	n=XXX	n=XXX	n=XXX	n=XXX	n=XXX
Time	Total	Urban		12:52	NA	NA	NA	NA	12:52
711110	Response	Olbail	10:20	n=1	n=0	n=0	n=0	n=0	n=1
	Time ERF Concentration	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
		Nurai		n=XXX	n=XXX	n=XXX	n=XXX	n=XXX	n=XXX

	Risk) Wildland - ntile Times - Baso Performance		Benchmark (Target)	2020-2024	2024	2023	2022	2021	2020
Alarm	Pick-up to	Urban		NA	NA	NA	NA	NA	NA
Handling	Dispatch	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Turnout	Turnout Time	Urban		NA	NA	NA	NA	NA	NA
Time	1st Unit	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Travel Time 1st Unit Distribution	Urban		NA	NA	NA	NA	NA	NA
Travel		Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Travel Time ERF Concentratio	Urban		NA	NA	NA	NA	NA	NA
	n	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	Total	I I ala a a		NA	NA	NA	NA	NA	NA
	Response	Urban	6:20	n=0	n=0	n=0	n=0	n=0	n=0
	Time 1st Unit on Scene			mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
Total	Distribution	Rural		n=XXX	n=XXX	n=XXX	n=XXX	n=XXX	n=XXX
e Time  Total  Response  Time ERF		Urban		NA	NA	NA	NA	NA	NA
	•	Urban	12:30	n=0	n=0	n=0	n=0	n=0	n=0
	Concentratio	Rural		mm:ss	mm:ss	mm:ss	mm:ss	mm:ss	mm:ss
	n	Ruiai		n=XXX	n=XXX	n=XXX	n=XXX	n=XXX	n=XXX

#### **Response Time Performance by Planning Zone**

The following tables represent all emergent responses in planning zones 1-9. PZ 8, 9, and 10 do not currently house any fixed FFD assets and usually represent times of apparatus responding from Station 2, Station 7, or Station 3.

**Table 35: PZ 1 Response Time Performance** 

Planning Zone 1 90th Percentile Times Baseline Performance  (all incidents)		2020- 2024	2024	2023	2022	2021	2020
Alarm Handling	Pick-up to Dispatch	NA	NA	NA	NA	NA	NA
Turnout Time	Turnout Time 1st Unit	1:14	1:10	1:13	1:11	1:14	1:18
Twowal	Distribution	5:01	4:53	4:54	5:17	5:01	5:06
Travel Time	Concentration*	NA	NA	NA	NA	NA	NA
	Distribution	7:32	7:50	7:35	7:48	6:59	7:21
	Total Distribution		n=1712	n=1792	n=1226	n=1491	n=1456
Response Time	Concentration*	NA	NA	NA	NA	NA	NA
	Concentration	NA	NA	NA	NA	NA	NA

Planning Zone 2 90th Percentile Times Baseline Performance  (all incidents)		2020- 2024	2024	2023	2022	2021	2020
Alarm Handling	Pick-up to Dispatch	NA	NA	NA	NA	NA	NA
Turnout Time	Turnout Time 1st Unit	1:15	1:10	1:11	1:16	1:19	1:19
T1	Distribution	5:58	6:00	5:57	6:04	6:02	5:47
Travel Time	Concentration *	NA	NA	NA	NA	NA	NA
	Distribution	8:22	8:31	8:41	8:25	7:47	8:12
Total	i otai		n=965	n=969	n=857	n=892	n=930
Response Time	Concentration	NA	NA	NA	NA	NA	NA
	*	NA	NA	NA	NA	NA	NA

Table 36: PZ 2 Response Time Performance

Planning Zone 3 90th Percentile Times Baseline Performance  (all incidents)		2020- 2024	2024	2023	2022	2021	2020
Alarm Handling	Pick-up to Dispatch	NA	NA	NA	NA	NA	NA
Turnout Time	Turnout Time 1st Unit	1:15	1:10	1:13	1:16	1:18	1:18
T1	Distribution	6:00	6:13	6:10	6:00	5:43	5:37
Travel Time	Concentration *	NA	NA	NA	NA	NA	NA
	Distribution	8:22	9:09	8:52	8:26	7:40	7:59
Total Posponso	Distribution	n=2803	n=500	n=542	n=572	n=571	n=616
Response Time	Concentration	NA	NA	NA	NA	NA	NA
	*	NA	NA	NA	NA	NA	NA

Table 37: PZ 3 Response Time Performance

Planning Zone 4 90th Percentile Times Baseline Performance  (all incidents)		2020- 2024	2024	2023	2022	2021	2020
Alarm Handlin g	Pick-up to Dispatch	NA	NA	NA	NA	NA	NA
Turnout Time	Turnout Time 1st Unit	1:18	1:15	1:17	1:19	1:21	1:21
T1	Distribution	4:59	4:49	5:00	4:57	4:52	5:11
Travel Time	Concentration *	NA	NA	NA	NA	NA	NA
	Distribution	7:33	8:02	7:42	7:32	6:54	7:29
	Total Distribution		n=765	n=884	n=792	n=809	n=810
Respons e Time	Concentration	NA	NA	NA	NA	NA	NA
	*	NA	NA	NA	NA	NA	NA

Table 38: PZ 4 Response Time Performance

Planning Zone 5 90th Percentile Times Baseline Performance  (all incidents)		2020- 2024	2024	2023	2022	2021	2020
Alarm Handlin g	Pick-up to Dispatch	NA	NA	NA	NA	NA	NA
Turnout Time	Turnout Time 1st Unit	1:12	1:10	1:10	1:13	1:13	1:16
T1	Distribution	5:45	6:18	5:43	5:42	5:28	5:14
Travel Time	Concentration *	NA	NA	NA	NA	NA	NA
	Distribution	8:09	8:45	8:39	8:06	7:25	7:33
Total Pospons	Distribution	n=6092	n=1069	n=1213	n=1241	n=1220	n=1351
Respons e Time	Concentration	NA	NA	NA	NA	NA	NA
	*	NA	NA	NA	NA	NA	NA

Table 39: PZ 5 Response Time Performance

Planning Zone 6 90th Percentile Times Baseline Performance  (all incidents)		2020- 2024	2024	2023	2022	2021	2020
Alarm Handling	Pick-up to Dispatch	NA	NA	NA	NA	NA	NA
Turnout Time	Turnout Time 1st Unit	1:19	1:16	1:18	1:14	1:23	1:27
T1	Distribution	6:31	6:31	7:49	6:37	5:43	6:26
Travel Time	Concentration *	NA	NA	NA	NA	NA	NA
	Distribution	9:03	8:39	11:29	9:16	8:34	8:23
Total			n=83	n=76	n=74	n=69	n=75
Response Time	Concentration	NA	NA	NA	NA	NA	NA
	*	NA	NA	NA	NA	NA	NA

Table 40: PZ 6 Response Time Performance

Planning Zone 7 90th Percentile Times Baseline Performance  (all incidents)		2020- 2024	2024	2023	2022	2021	2020
Alarm Handling	Pick-up to Dispatch	NA	NA	NA	NA	NA	NA
Turnout Time	Turnout Time 1st Unit	1:19	1:13	1:15	1:23	1:20	1:22
T1	Distribution	5:44	5:44	5:46	5:47	5:29	5:51
Travel Time	Concentration *	NA	NA	NA	NA	NA	NA
	Distribution	8:16	8:30	8:42	8:14	7:13	8:06
	10tai		n=781	n=928	n=935	n=816	n=575
Response Time	Concentration	NA	NA	NA	NA	NA	NA
	*	NA	NA	NA	NA	NA	NA

Table 41: PZ 7 Response Time Performance

Planning Zone 8 90th Percentile Times Baseline Performance  (all incidents)		2020- 2024	2024	2023	2022	2021	2020
Alarm Handling	Pick-up to Dispatch	NA	NA	NA	NA	NA	NA
Turnout Time	Turnout Time 1st Unit	1:14	1:09	1:08	1:16	1:16	1:16
Twowal	Distribution	8:26	8:05	8:25	8:45	8:35	8:05
Travel Time	Concentration *	NA	NA	NA	NA	NA	NA
	Distribution	10:51	11:03	11:17	11:00	10:29	10:31
Total			n=251	n=198	n=187	n=147	n=171
Response Time	Concentration	NA	NA	NA	NA	NA	NA
	*	NA	NA	NA	NA	NA	NA

**Table 42: PZ 8 Response Time Performance** 

Planning Zone 9 90th Percentile Times Baseline Performance  (all incidents)		2020- 2024	2024	2023	2022	2021	2020
Alarm Handlin g	Pick-up to Dispatch	NA	NA	NA	NA	NA	NA
Turnout Time	Turnout Time 1st Unit	1:16	1:16	1:10	1:13	1:20	1:20
T1	Distribution	8:01	7:57	7:41	7:35	8:19	8:05
Travel Time	Concentration *	NA	NA	NA	NA	NA	NA
	Distribution	10:04	8:51	10:40	9:36	10:04	10:10
	Total Distribution		n=21	n=69	n=61	n=47	n=42
Respons e Time	Concentration	NA	NA	NA	NA	NA	NA
	*	NA	NA	NA	NA	NA	NA

Table 43: PZ 9 Response Time Performance

Planning Zone 10 90th Percentile Times Baseline Performance  (all incidents)		2020- 2024	2024	2023	2022	2021	2020
Alarm Handlin g	Pick-up to Dispatch	NA	NA	NA	NA	NA	NA
Turnout Time	Turnout Time 1st Unit	1:17	1:20	1:18	1:17	1:06	NA
T1	Distribution	10:07	10:53	9:22	10:35	8:53	NA
Travel Time	Concentration *	NA	NA	NA	NA	NA	NA
	Distribution	12:44	13:53	11:52	13:01	10:30	NA
Total	Distribution	n=63	n=24	n=24	n=4	n=11	n=
Respons e Time	Concentration	NA	NA	NA	NA	NA	NA
	*	NA	NA	NA	NA	NA	NA

**Table 44: PZ 10 Response Time Performance** 

#### **Performance Gaps**

Performance gaps are identified by measuring the current baseline performance against the stated benchmark objectives. For example, the FFD has set its benchmark objective for travel time at 4 minutes, 90% of the time. If the baseline number is 3:55, then the "Gap" column would show a green :05, meaning the standard is being met by 5 seconds. If the baseline number is 4:24, then the "Gap" column would show a red :24 meaning the standard is not being met by 24 seconds. Measuring performance gaps identifies specific areas of concern throughout the primary service

area. These performance gaps result from various circumstances such as the current placement of fixed assets, the type and location of available apparatus, available staffing or current infrastructure. Identifying performance gaps is essential when considering preparations for future growth and strategic planning. The following tables display performance gaps for the primary service area as well as the individual planning zones on a trailing 5 year basis.

Primary Service Area 2024 Performance Gaps		Baseline	Benchmark	Gap
Alarm Handling	All	2:33	1:00	1:33
<b>Turnout Time</b>	Fires	1:23	1:20	0:03
(First Due)	EMS	1:08	1:00	0:08
Travel Time	Distribution	5:56	4:00	1:56
(All Calls)	Concentration	NA	NA	NA
Total Response	Distribution	8:39	6:00	2:39
Time (All Calls)	Concentration	NA	NA	NA

**Table 45: City Wide Performance Gaps** 

2024 Fires Moderate Risk Performance Gaps							
	Baseline Benchmark Gap						
Alarm Handling	Pick-up to	1:46	1:00	0:46			
	Dispatch						
<b>Turnout Time</b>	1 <sup>st</sup> Unit	1:32	1:20	0:12			
Travel Time	Distribution	4:58	4:00	0:58			
	Concentration	11:48	8:00	3:48			
<b>Total Response</b>	Distribution	7:35	6:20	1:15			
Time	Concentration	13:00	10:20	2:40			

2024 EMS Low Risk Performance Gaps					
		Baseline	Benchmark	Gap	
Alarm Handling	Pick-up to Dispatch	2:45	1:00	1:45	
Turnout Time	1 <sup>st</sup> Unit	1:07	1:00	0:07	
Travel Time	Distribution	6:08	4:00	2:08	
Total Response Time	Distribution	8:51	6:20	2:31	

2024 Hazardous Materials Moderate Risk Performance Gaps					
		Baseline	Benchmark	Gap	
Alarm Handling	Pick-up to	2:09	1:00	1:09	
	Dispatch				
Turnout Time	1 <sup>st</sup> Unit	1:14	1:20	0:06	
Travel Time	Distribution	5:53	4:00	1:53	
	Concentration	11:30	8:00	3:30	
<b>Total Response</b>	Distribution	8:16	6:20	1:56	
Time	Concentration	12:59	10:20	2:39	

2024 Technical Rescue Moderate Risk Performance Gaps				
		Baseline	Benchmark	Gap
<b>Alarm Handling</b>	Pick-up to	3:01	1:00	2:01
	Dispatch			
<b>Turnout Time</b>	1 <sup>st</sup> Unit	1:39	1:20	0:19
Travel Time	Distribution	7:35	4:00	3:35
	Concentration	NA	8:00	NA
<b>Total Response</b>	Distribution	10:58	6:20	4:38
Time	Concentration	NA	10:20	NA

#### Performance Gaps by Planning Zone

2024 Planning Zone 1 Performance Gaps				
		Baseline	Benchmark	Gap
Alarm Handling	Pick-up to Dispatch	NA	NA	NA
Turnout Time	1 <sup>st</sup> Unit	NA	NA	NA
Travel Time	Distribution	4:53	4:00	0:53
Travel Time	Concentration	NA	NA	NA
Total Response Time	Distribution	7:50	6:00	1:50
	Concentration	NA	NA	NA

2024 Planning Zone 2 Performance Gaps				
		Baseline	Benchmark	Gap
Alarm Handling	Pick-up to Dispatch	NA	NA	NA
Turnout Time	1 <sup>st</sup> Unit	NA	NA	NA
Travel Time	Distribution	6:00	4:00	2:00
	Concentration	NA	NA	NA
<b>Total Response Time</b>	Distribution	8:31	6:00	2:31
	Concentration	NA	NA	NA

2024 Planning Zone 3 Performance Gaps				
		Baseline	Benchmark	Gap
Alarm Handling	Pick-up to Dispatch	NA	NA	NA
Turnout Time	1 <sup>st</sup> Unit	NA	NA	NA
Travel Time	Distribution	6:13	4:00	2:13
	Concentration	NA	NA	NA
<b>Total Response Time</b>	Distribution	9:09	6:00	3:09
	Concentration	NA	NA	NA

2024 Planning Zone 4 Performance Gaps					
	Baseline Benchmark Gap				
Alarm Handling	Pick-up to Dispatch	NA	NA	NA	
Turnout Time	1 <sup>st</sup> Unit	NA	NA	NA	
Travel Time	Distribution	4:49	4:00	0:49	
	Concentration	NA	NA	NA	
<b>Total Response Time</b>	Distribution	8:02	6:00	2:02	
	Concentration	NA	NA	NA	

2024 Planning Zone 5 Performance Gaps				
Baseline Benchmark Gap				
Alarm Handling	Pick-up to Dispatch	NA	NA	NA
Turnout Time	1 <sup>st</sup> Unit	NA	NA	NA
Travel Time	Distribution	6:18	4:00	2:18
	Concentration	NA	NA	NA
Total Response Time	Distribution	8:45	6:00	2:45
	Concentration	NA	NA	NA

2024 Planning Zone 6 Performance Gaps				
		Baseline	Benchmark	Gap
Alarm Handling	Pick-up to Dispatch	NA	NA	NA
Turnout Time	1 <sup>st</sup> Unit	NA	NA	NA
Travel Time	Distribution	6:31	4:00	2:31
	Concentration	NA	NA	NA
<b>Total Response Time</b>	Distribution	8:39	6:00	2:39
	Concentration	NA	NA	NA

2024 Planning Zone 7 Performance Gaps					
	Baseline Benchmark Gap				
Alarm Handling	Pick-up to Dispatch	NA	NA	NA	
Turnout Time	1 <sup>st</sup> Unit	NA	NA	NA	
Travel Time	Distribution	5:44	4:00	1:44	
	Concentration	NA	NA	NA	
<b>Total Response Time</b>	Distribution	8:30	6:00	2:30	
	Concentration	NA	NA	NA	

2024 Planning Zone 8 Performance Gaps					
	Baseline Benchmark Gap				
Alarm Handling	Pick-up to Dispatch	NA	NA	NA	
Turnout Time	1 <sup>st</sup> Unit	NA	NA	NA	
Travel Time	Distribution	8:05	4:00	4:05	
	Concentration	NA	NA	NA	
Total Response Time	Distribution	11:03	6:00	5:03	
	Concentration	NA	NA	NA	

2024 Planning Zone 9 Performance Gaps							
Baseline Benchmark Gap							
Alarm Handling	Pick-up to Dispatch	NA	NA	NA			
Turnout Time	1 <sup>st</sup> Unit	NA	NA	NA			
T1 T:	Distribution	7:57	4:00	3:57			
Travel Time	Concentration	NA	NA	NA			
Total Response	Distribution	8:51	6:00	2:51			
Time	Concentration	NA	NA	NA			

2024 Planning Zone 10 Performance Gaps							
Baseline Benchmark Gap							
Alarm Handling	Pick-up to Dispatch	NA	NA	NA			
Turnout Time	1 <sup>st</sup> Unit	NA	NA	NA			
Tuoval Tima	Distribution	10:53	4:00	6:53			
Travel Time	Concentration	NA	NA	NA			
T-4-1 D Ti	Distribution	13:53	6:00	7:53			
Total Response Time	Concentration	NA	NA	NA			

#### **Response Reliability**

Response reliability is the percentage of time that a first due unit is available for calls in its primary response area. If a unit were available to respond to every call for service in its initial response area, it would have 100%-unit reliability. There are several reasons why a first due unit might not be available for calls in its primary area; out on another call for service, training out of area or equipment failure are a few examples. The FFD puts emphasis on maintaining adequate city-wide emergency response coverage during day to day activities. This is accomplished using several methods. Each station is equipped with video conferencing capabilities to allow for

meetings and classroom training sessions without units having to vacate their primary response area. Apparatus will routinely exchange coverage areas when operating remotely is not an option. Stations 4 and 6 are the primary locations for fixed training assets. This necessitates that personnel leave their primary response areas for training purposes. To maintain adequate coverage, units from Stations 4 and 6 are repositioned to cover the response areas of the units attending training. For example, Engine 804 stands by for Engine 802 while 802 is at the training ground. 804 now becomes the primary engine for PZ 2 and 802 becomes the primary engine for PZ 4. From April until November, this occurs regularly. The FFD maintains a standard operating guideline (SOG 103) that provides guidance to the officer in charge on maintaining station coverage. An analysis of simultaneous incidents provides an overview of unit reliability for each planning zone and the entire service area. Table 46 shows unit reliability on a trailing five year basis. The departments goal is to maintain unit reliability of 90% or greater.


		Total (	Calls for S	Service		Sin	nultaneo	us Calls	for Serv	vice		Unit Reliability			
	2024	2023	2022	2021	2020	2024	2023	2022	2021	2020	2024	2023	2022	2021	2020
PZ 1	3680	3720	3854	3597	3652	533	506	528	460	382	85.52%	86.40%	86.30%	87.21%	89.54%
PZ 2	2367	2186	2332	2190	1989	199	188	208	181	149	91.59%	91.40%	91.08%	91.74%	92.51%
PZ 3	1412	1371	1424	1389	1474	84	73	70	70	74	94.05%	94.68%	95.08%	94.96%	94.98%
PZ 4	1677	1844	1715	1576	1595	101	144	106	97	83	93.98%	92.19%	93.82%	93.85%	94.80%
PZ 5	2471	2701	2735	2544	2348	259	251	283	240	198	89.52%	90.71%	89.65%	90.57%	91.57%
PZ 6	170	173	164	147	142	3	2	4	3	1	98.24%	98.84%	97.56%	97.96%	99.30%
PZ 7	1794	1823	1749	1552	1275	149	123	120	101	77	91.69%	93.25%	93.14%	93.49%	93.96%
PZ 8	534	516	463	376	352	10	13	8	8	5	98.13%	97.48%	98.27%	97.87%	98.58%
PZ 9	40	116	99	84	88	0	3	1	1	0	100.00%	97.41%	98.99%	98.81%	100.00%
PZ 10	44	36	13	17	NA	0	0	0	0	NA	100.00%	100.00%	100.00%	100.00%	NA
Dept. wide	14,189	14,512	14,564	13,493	12,923	1,338	1,304	1,328	1,162	969	90.57%	91.39%	90.88%	91.39%	92.50%


**Table 46: Unit Reliability** 


This table demonstrates that PZ 1 is the only planning zone within the city that is not meeting the goal of 90%-unit reliability. PZ 1 also has the largest overall call volume by a significant margin. Department wide, the response reliability goal is being met, however the trailing 5-year trend shows a steady decrease in unit reliability, indicative of a steadily growing demand for services and an increasing strain on resources.


#### **Incident Projection Numbers**

The FFD believes it is important to look into the future. To assist the FFD with planning several projection charts have been built in an attempt to forecast future operations.

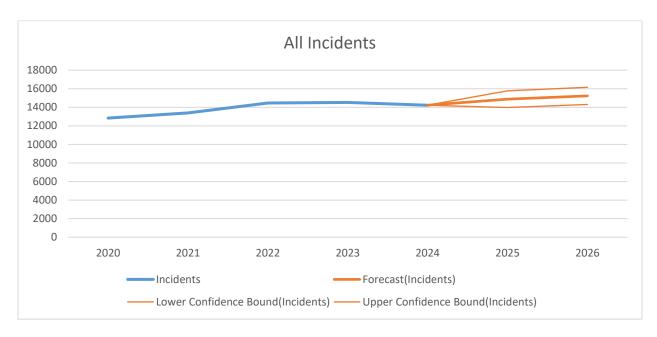

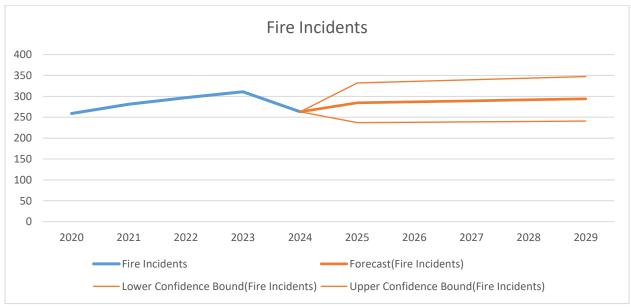

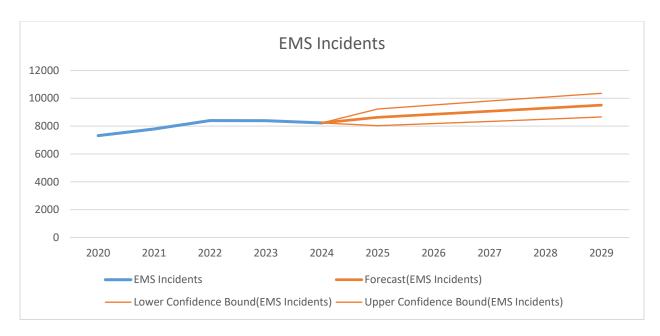

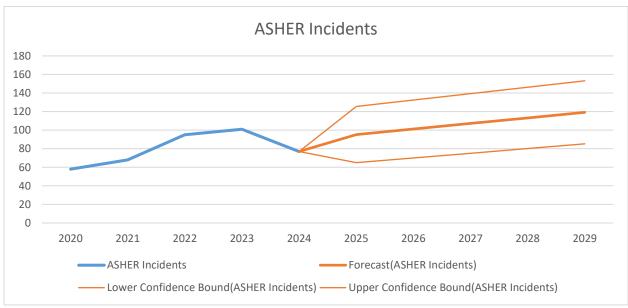

#### Section 5: Evaluation of Current Deployment and Performance

#### **Evaluation Methodology**

In order to identify strengths and weaknesses within the organization, it is important to evaluate performance at regular intervals. The FFD currently compiles response data on a monthly basis. Five-year trailing data is updated annually. This process includes an assessment of current workloads, volume and intensity of response types with an updated risk analysis of the current planning zones.

#### **Evaluation Determinations**

Monthly response data is forwarded to all personnel in order to identify performance gaps or deteriorating trends as early as possible and allow corrective measures to be taken at the company level where possible. Quarterly and annualized data are also assessed in addition to the annual review of this CRA/SOC to assist in strategic planning and future placement of fixed assets and department resources.

#### **Alarm Handling**

The NFPA 1221 Standard of 60 seconds 80% of the time and 106 seconds 95% was used for all calls except EMS, Hazmat, and Technical Rescue. For EMS, Hazmat, and Technical Rescue, NFPA 1221 indicated 90 seconds 90% of the time and 120 seconds 99% of the time. In this updated version of the SOC, the FFD has used NFPA 1221 (2019) as a guideline for alarm handling times. The updated 2019 version states that the standard of alarm handling will be 60 seconds 90% of the time for the following high priority calls:

- Trauma
- Neurologic emergencies (stroke, seizure)
- Cardiac related events
- Unconscious/unresponsive patients
- Allergic reaction
- Patient not breathing
- Choking
- Fire
- Explosion
- Other calls as determined by the AHJ

Time requirements that differ include:

- Joint responses with law enforcement
- HazMat
- TRT

An analysis of FFD alarm handling times indicates that times are below the desired standard of performance, especially for EMS incidents. Over the last several years, several changes have been implemented to alarm handling which resulted in some minor improvements. In 2012, the Red River Regional Dispatch Center (RRRDC) purchased the PRO QA medical dispatching software program through a grant in an effort to improve alarm handling times. This should have resulted in much better alarm handling times, but has not. In 2015 the FFD began dispatching to EMS calls based on chief complaint; one minute and 30 seconds was reached 54.1% of the time in 2015 compared to 43.7% in 2014, and 35.6% in 2009. These numbers show some improvement over the years, but the FFD will continue working with the RRRDC to find solutions to bring the alarm handling times to acceptable levels.

A review of the alarm handling process and time stamping procedure at the RRRDC by the FFD personnel revealed five reasons for the below standard times:

- Inefficient call handling procedures
- Staffing
- Law Enforcement focused culture where speed is less important
- Technical limitations
- ProQA and EMD dispatching protocols

#### **Turnout Times**

Turnout times are one of the only times the fire department controls completely and where improvements can be made by fire personnel. Turnout times have remained consistent over the last five years with only a couple seconds difference. In an attempt to reduce turnout times further, a time clock was placed on the apparatus floor at Station 1 in 2017 so crews could see in real time how many seconds it had been since they were dispatched. Turnout times are discussed frequently with suppression crews and the importance of quick turnout times is emphasized.

#### **Travel Times**

Travel times are affected by many variables, with road conditions being a major factor during most of the year in Fargo. During winter driving conditions, roads are slippery or have reduced driving lanes due to snow cover. During the summer, road construction blocks many streets and requires detours and traffic slowdowns. Emergency vehicle preemption devices, otherwise

known as Opticoms, are used at the majority of light controlled intersections in an attempt to allow apparatus to continue through without the need to come to a complete stop. The FFD will continue to support safe driving practices and record times to demonstrate actual times.

#### **Section 6: Maintenance and Improvement of Response Capabilities**

During discussions with RRRDC staff concerning alarm handling times, several issues have surfaced. RRRDC staff report a large number of 9-1-1 calls that have an incomplete location due to the increasing number of cell phones used to make calls. When landlines were more prevalent, reverse 9-1-1 provided the location and phone number quickly. Cell phones often only provide latitude and longitude coordinates which may not be exact enough to determine an address. Because of this, dispatchers spend extra time questioning the caller to determine the address of the incident, which contributes to an extended alarm handling time. RRRDC did begin using RapidSOS in February of 2019, which provides a faster, more effective location for the dispatcher that is generated after entering the phone number. RRRDC also changed an internal policy in February of 2020 that permits the call taker to accept a phone number if it populates on their screen and the caller provides it, rather than repeating it back for verification.

RRRDC staff also report a large number of 9-1-1 calls that require an extended time to understand the nature of the emergency and the location from the caller due to language difficulties. Some of these calls may fall under the category of "language translation," but many are also due to variables that make understanding the caller difficult. The alarm handling time is extended due to these issues with the caller.

The list included in NFPA 1221 that require a 60 second alarm handling time 90% of the time includes several specific EMS call types. RRRDC staff report that it is often difficult to ascertain the exact nature of the call, which may change as dispatchers gather additional information. The data the FFD gathers to analyze for times does not provide the specific EMS complaint from CAD, but rather groups the incidents according to NFIRS codes which shows who arrived first on scene, the FFD or F-M Ambulance.

These issues not only make it difficult for RRRDC staff to dispatch FFD units within the time standard, but the data analysis is difficult to sort according to the call types listed.

#### Resolution of inefficient call handling procedures

The RRRDC is a multi-jurisdictional dispatch center, dispatching all public safety agencies in Cass County, North Dakota and Clay County, Minnesota. Dispatchers are required to follow numerous dispatching protocols and dispatch fire, law enforcement, medical services, as well as many non-emergency calls that need various levels of attention. All of these agencies have different priorities and expectations of the dispatch center. RRRDC also has a difficult time recruiting and retaining new dispatchers, with extended alarm handling time as the result. The FFD will continue to monitor and make recommendations to improve this process.

#### Resolution of technical limitations

One factor that was identified as delaying alarm handling times was the use of priority dispatching protocols for EMS calls. Since the FFD was considered a secondary responder to all EMS calls, EMS calls were screened to determine if an FFD response was needed. The series of questions that were asked delayed dispatch, but eliminated an estimated 50% of medical runs where a fire crew would likely not have a positive impact on patient outcomes. As a solution, because most of the slow alarm handling time problems involved EMS calls, the FFD began dispatching on chief complaint. If a dispatcher receives certain chief complaints from a caller, it would trigger an immediate dispatch of the closest fire unit. This process has reduced call handling times to a certain degree, but has also increased the call volume and strain on FFD resources significantly. Table 47 below displays the chief complaint call handling guide.

Call types highlighted in yellow require metro fire response					
01 Abdominal Pain	17 Falls				
02 Allergies /Envenomation	18 Headache				
03 Animal Bites/Attacks	19 Heart Problem				
05 Back Pain - Non-traumatic	20 Heat/Cold Exposure				
06 Breathing Problems	21 Hemorrhage/Laceration				
07 Burns/Scalds	23 Overdose Poisoning				
08 Inhalation	24 Pregnancy/Childbirth				
09 Cardiac/Respiratory arrest	26 Sick Person				
10 Chest Pain	27 Stab/Gunshot/Penetrating Trauma				
11 Choking	28 Stroke				
12 Convulsions /Seizures	30 Traumatic Injuries				
13 Diabetic problem	31 Unconscious/Fainting				
14 Drowning bath/pool (use water rescue for river	32 Unknown Problem – Man Down				
response)					
15 Electrocution/Lightning	33 Transfer/Interfacility				
16 Eye Problems					
Assault					
Sexual Assault					
Carbon Monoxide/Inhalation/HazMat	Handle under appropriate call type				
Inaccessible Incident/Other entrapment	Handle under appropriate call type (rescues)				
Psychiatric/Abnormal Behavior/Suicide Attempt	Handle under mentally impaired or suicidal call				
	type - fire does not respond				
Traffic/Transportation incidents	Handle under Injury accident call type				
x-send fire 01Abdominal Pain	x-send fire 18 Headache				
x-send fire 03 Animal Bites	x-send fire 20 Heat-Cold				
x-send fire 05 Back Pain	x-send fire 26 Sick Person				
x-send fire 16 Eye Problems	x-send fire 33 Transfer				

**Table 47: EMS Call Handling Guide** 

Turnout times are within the direct control of the personnel working for the FFD. The time clock placed on the apparatus floor at Station 1 has been met with positive feedback and has been a factor in reduced turnout times for the station. The purchase and installation of time clocks for the remaining stations is currently a top consideration and will be completed as funding allows. Turnout times will also continue to be recorded and distributed monthly to all battalion chiefs and captains.

#### Performance gaps and planning zone issues

Performance gaps within the FFD include alarm handling, turnout times, travel times, fixed asset locations, and ERF concentrations. The FFD has made a number of adjustments in an attempt to improve unit reliability.

Alarm handling times were addressed in the section above.

#### **Turnout Times:**

- Turnout times are calculated on a monthly basis and forwarded to all personnel to allow deficiencies in turnout time to be addressed as soon as possible at the company level.
   This data is forwarded along with trailing months so positive or negative trends can be identified.
- Technical limitations exist with the dispatching and mobile software used by the
  department with deficiencies in its reliability and accuracy. The department continues to
  work with the City of Fargo IS department and software provider Tyler Technologies to
  address issues.

#### Travel Times and Fixed Asset Locations:

- 1. PZ5 is a comprised primarily of commercial properties, commerce centers and multifamily dwellings. Station 5's location is adjacent to main through ways which provide good access, but also are susceptible to extremely high volumes of traffic during normal working hours causing gridlock or slow traffic conditions at certain periods of the day. Station 5's location also creates some overlap with Station 4's first due area and creates a gap in coverage between PZ5 and PZ7 based on ISO travel recommendations. The financial impact of relocating Fire Station 5 is currently cost prohibitive and there are no immediate plans to undertake the process in the foreseeable future.
- 2. Fire Station 6 is an isolated station in a primarily industrial portion of the city. Its placement was chosen based on the location of a city owned property that was remodeled to accommodate a fire station. This location does not allow efficient access to the more developed areas of PZ6, it does however, strategically place it in close proximity to

- economically sensitive buildings with high dollar values, large numbers of employees and above normal quantities of hazardous materials. Station 6's close proximity to theses high risk facilities is a justifiable tradeoff for its otherwise extended travel times to other portions of PZ6.
- 3. Fire Station 7 is isolated in the far southwestern corner of the city. Adjacent fire stations are located on the northern and eastern edges of PZ7 only. There is a coverage gap along the northern edge of PZ7 which causes the response time for the secondary engine located in PZ5 to be extended. The FFD attempts to alleviate the delayed responses from secondary apparatus by stationing two apparatus, 1 engine and 1 truck, along with a battalion chief at Fire Station 7.
- 4. Based on ISO travel distances, Station 2 is located too far south and west. Although this does aid in responses to the adjacent PZ8 where there are currently no fixed assets, it creates a gap in coverage on the northern edge of PZ2 which increases travel and total response times to that area. Repositioning Station 2 is currently cost prohibitive and would also require the allocation of land in a developed portion of the city which will also prove difficult.
- 5. Geographical variables: Travel times are often compromised by conditions beyond the department's control. Winter road conditions traditionally inhibit travel from November through March or April on an annual basis. The short warm weather season also provides a condensed window for road construction; causing traffic delays, detours and impediments on a city-wide scale for the entirety of the summer months. The needs of the fire department are secondary to completing infrastructure projects that will improve the city.

#### **ERF** Concentrations:

- The FFD has reduced its ERF for alarm activations with no sign of an emergency present (smoke odor or visible smoke or fire) to one engine company and one truck company.
   This should increase unit reliability by reducing the instances of resources being assigned to nuisance alarms occurring outside of their primary planning zone.
- 2. Battalion chiefs are given the authority to redirect assigned resources where appropriate. For example, a secondary resource from an ERF could be diverted to a single engine

- response in its vicinity and replaced with an additional resource from outside the static response area for the aforementioned ERF.
- 3. Future plans may include positioning secondary response vehicles in various fire stations. This will require budgetary allocations for resources and staffing that are currently not available. There is no current time frame outlining when sufficient funding may be available for the addition of the staffing and equipment necessary to operate an additional apparatus.
- 4. PZ3 is "geographically" isolated; there is a single arterial roadway from the south (10<sup>th</sup> St. N.) and a single arterial roadway from the west (19<sup>th</sup> Ave. N.) leading into PZ3 that allows for more than a single lane of traffic. Because there is essentially one way in and out, these throughways allowing for two lanes of directional traffic are often congested. This lack of sufficient infrastructure along with the long and narrow geography of the city isolates Fire Station 3 and causes travel and response times for apparatus placed outside of PZ3 to be extended significantly. The predominantly residential nature of PZ3 along with the age of that portion of the city, makes the expansion of the current infrastructure cost prohibitive and unlikely. Extended ERF concentration times for PZ3 can be expected into the foreseeable future.
- 5. PZ9 is primarily rural in nature with little current development. It was established in 2015 for planning purposes only. The FFD will continue to gather data from within PZ9, however there are no current plans to place any fixed assets within PZ9. Future plans will be adjusted based upon the future development and demand for services in the area.

Section 7: Correlation of CRA-SOC Document to CFAI Accreditation Model

Performance Indicator	Location in SOC
2A.1	p. 18 Service Area
	p. 12 Figure 1 Map of the City of Fargo
SA.2	p. 18 Service Area
	p. 20 Figure 7 Primary Mutual Aid Response Map
CC 2A.3	p. 22 Planning Zones
	p. 19 Figure 6 Map of Planning Zones
CC 2A.4	P. 53 Summary of Risks by Planning Zone
2A.5	p. 47 Description of Loss and Injury
2A.6	p. 10 Geographic Characteristics of the Service Area
	p. 53 Summary of Risks by Planning Zone
2A.7	p. 13 Census, Population, and Area,
	p. 14 Table 2 Demographics for the primary service area
2A.8	p. 28 Public Education/Community Risk Reduction
	p. 133 Appendix A Community Risk Reduction Plan
2A.9	p. 109 Planning Zone Comparisons
CC 2B1	p. 30 All Hazard Risk Assessment & Response Strategies
2B.2	p. 53 Summary of Risks by Planning Zone
2B.3	p. 47 Description of Loss and Injury
CC 2B.4	p. 53 Summary of Risks by Planning Zone
2B.6	p. 109 Planning Zone Comparisons
CC 2C.1	p. 30 Methodology for Risk Assessment
CC 2C.2	p. 90 Response Time Performance
2C.3	p. 40 Fire Suppression Systems
CC 2C.4	p. 76 Critical Tasks and Effective Response Force
CC 2C.5	p. 82 Performance Objectives, Response Time Performance
2C.6	p. 109 Response Time Performance by Planning Zone
CC 2C.7	p. 82 Performance Objectives, Response Time Performance
2C.8	p. 17 Service Areas
	p. 23 Staffing, Apparatus, and Stations
	p. 25 Fire Suppression Alarm Assignments
CC 2D.1	p. 125 Evaluation of Current Deployment & Performance
2D.2	p. 125 Evaluation of Current Deployment & Performance
2D.4	p. 109 Response Time Performance by Incident Type
	p. 125 Evaluation of Current Deployment & Performance
2D.5	p. 127 Appendix A Community Risk Reduction Plan
CC 2D.6	p. 114 Performance Gaps
CC 2D.7	p. 127 Maintenance & Improvement of Response Capabilities

### Fargo Fire Department



# 2025 Community Risk Reduction Plan

#### **Table of Contents**

<u>Introduction</u>	136
Risk Reduction Plan	136
EMS Incidents	137
Vehicle Crashes	138
Low Risk Fires	139
Hazardous Materials Incidents	140
Moderate Risk Fire	140
High Risk Fire	141
Water/Ice Rescue	142
Technical Rescue	143
Flood	144
Tornado	145

#### Introduction

The purpose of this community risk reduction plan is to manage community risks as identified in the community risk assessment and standards of cover. As identified by the Center for Public Safety the community risk reduction program intends to be comprehensive and include both prevention and mitigation strategies. Risks identified are presented below along with the corresponding strategies. Many risks are managed through multiple programs, including code enforcement, public education, engineering controls, and finally emergency response.

#### **Risk Reduction Plan**

The intent of this document is not to repeat information that has been presented in the Standard of Cover. Community demographics, department information and other background information is available in the SOC. Risks have been identified and prioritized through a Community Risk Assessment. These risks are outlined below. Each identified risk is presented on a template that describes strategies to reduce the risk. The template follows a general format that identifies the risk, describes the problem statement, states the goal, identifies resources required, identifies community partners, lists activities, outputs, short and long-term impacts, describes the rationale and assumptions, and finally describes the evaluation methods. It is important to note that every attempt is made to determine evaluation methods that measure outcomes as opposed to outputs. Often, the outcomes will be an evaluation of the number of incidents in Fargo as compared to a city of similar size in our region. These types of evaluations are similar to that of response evaluation. For example, response evaluations typically consider response times (output) and compare those response times to national standards, a fire growth chart, or in the case of ems a suggested care timeline. Outcomes can be measured statistically to determine correlation to an activity of either response or prevention. However, proving causation is usually quite difficult as many factors can simultaneously influence rates of incidents.

#### **EMS Incidents**

EMS Incidents  Problem Statement:				
	arrest decreases by 10 perc	ent every minute intervent	tion is delayed.	
Goal:		<u>-</u>	<u> </u>	
Increase the survivabili	ty rates of cardiac arrest vic	tims in the community.		
Resources Required:				
Trained CPR Instructors Public Access Defibrilla Classroom space		Brochures Volunteers Staff time		
Community Partners:		Stair time		
Essentia Health American Red Cross		Sanford Health Pulsepoint App		
Activities	Outputs	Short-Term Impacts	Long-Term Impacts	
HeartSafe Fargo Save a Life Saturday AED/CPR Courses	No. of AED's No. of attendees No. AED certified	Increased awareness of public access AED's and administration of CPR	Improved intervention and AED access times increased survival rates	
Rationale: (How change occurs &	program rationale)	Assumptions: (Factors or conditions assumed to be true)		
The combination of pu and trained people cap	blic access defibrillators bable of using them will and intervention of cardiac	The community supports funding AED's and hands on courses.		
Evaluation Methods:		1		
Data will have to be co	llected from FM Ambulance	or other healthcare provid	ders in the area to	

Data will have to be collected from FM Ambulance or other healthcare providers in the area to determine if survival rates have increased and if bystander CPR rates have increased.

#### **Vehicle Crashes**

Vehicle crashes can cause injury to occupants

#### Goal:

Reduce the impact of vehicle crashes particularly on young occupants

#### **Resources Required:**

Website, brochures

#### **Community Partners:**

Sanford Health – Safety Shoppe/Safe Kids

Regional Traffic Safety Advocates - ND Vision Zero

regional traine safety 7th	4100ates 115 1151011 2e10			
Activities	Outputs	Short-Term Impacts	Long-Term Impacts	
Direct citizens to Safety	No. of people sent to	Ensure Car seats are	Reduce the number of	
Shoppe resources	Safety Shoppe	properly installed.	injuries and fatalities in	
	No. of car seats	Educate citizens on	vehicle crashes	
	checked	vehicle safety		
Rationale:		Assumptions:		
(How change occurs & p	rogram rationale)	(Factors or conditions as	ssumed to be true)	
Ensuring children and ad	ults are properly	Citizens will participate in car seat checks.		
restrained in a vehicle wi	II reduce injuries and	Sanford will continue to support Safety Shoppe as		
fatalities of vehicle crash	es.	a resource for the community.		

#### **Evaluation Methods:**

Compare injury and fatality rate of vehicle crashes in Fargo vs other similar sized cities. This program is at no cost to the FFD. Monitoring of the program should continue to ensure the community has this resource available.

#### **Low Risk Fires**

#### **Problem Statement:**

Low risk fires include: vehicle fires, grass fires, dumpster fires, and fires in small outbuildings such as sheds. While these fires are considered low risk, they contribute to fire loss and have the potential to spread to other areas.

#### Goal:

To reduce the occurrence of low risk fires.

#### **Resources Required:**

Website Staff time for presentation of learn not to burn

Brochures Investigation personnel/time

Juvenile FireSetter program

#### **Community Partners:**

Fargo Police Department

National Highway Transportation Safety Administration

Fargo and West Fargo Public Schools

**Fargo Private Schools** 

Fargo Park District

Activities	Outputs	Short-Term Impacts	Long-Term Impacts
Distribute information and presentation through community partners Document and report vehicle fire causes Collaborate with FPD to determine persons responsible	No. of brochures distributed. No. of people taught Fire incident data No. of investigations prosecuted No. of investigations determined	Create a safety mindset in school age children and juveniles. Create awareness of causes of fires. Create awareness of vehicle recalls.	Change community behavior to reduce unintentional fires. (proper disposal methods). Reduce the number and impact of fire incidents.
Rationale: (How change occurs & p	rogram rationale)	Assumptions: (Factors or conditions assumed to be true)	
Low risk fires are started When the public is awar appropriate behavior ch	I for multiple reasons. e of those reasons,	People will want to reduce the number of fires when they are aware of the impact and knowledgeable on the methods of prevention.	

#### **Evaluation Methods:**

number of fires.

Specific programs can be evaluated based on a reduction of incidents on a pre and post program basis. The overall incident rates will be compared to cities of similar size in our region. Juvenile fire setter rates will be monitored to determine if further intervention is needed.

Hazardous Materials I	ncidents							
Problem Statement:								
Hazardous materials incidents have the potential to cause injury, fire, damage to property and/or the								
environment, and long-term impacts.								
Goal:								
To prevent all hazardous	materials incidents and er	nsure owners of hazardous	materials are prepared					
to reduce the impact of h	nazardous materials incide	nts.						
Resources Required:								
International Fire Code	Hazardo	ous Materials Managemen	t Plans					
Inspector Staff time	Tier II re	eports/ Pre incident plans						
Public education/training	g Built in	protection measures						
Community Partners:								
Facility owners	Industry	safety professionals						
North Dakota State Unive	ersity Federa	l Railroad Administration						
Department of Transportation ND DES Tier II reporting								
Activities	Outputs	Short-Term Impacts	Long-Term Impacts					
Enforce HMMP and	No. of facilities with	Create awareness of	Reduce the number of					
HMIS provisions of the	НММР.	Hazardous Materials	hazardous materials					
fire code.	No. of facilities with	requirements. Create	incidents. Where					
Ensure plans are	adequate Pre plans.	awareness of	incidents occur reduce					
available through MDC.	No. of facility	Hazardous Materials	the impact through					
Provide educational	personnel contacted.	potential impacts.	built in control and					
opportunities to facility	No. of brochures	Facility owners create	management plans.					
owner/operators.	distributed.	proper inventories and						
Provide educational		management plans.						
brochures.		Create awareness with						
Monitor legislation.		legislators.						
Rationale:		Assumptions:						
(How change occurs & p		(Factors or conditions assumed to be true)						
Create awareness of the	•	When owner/operators	•					
	associated with hazardous materials. Facilities understand the impact of hazardous materials							
that are aware of the haz		they will work to reduce the potential for an						
management and invent	•	incident to occur. Owners that are aware of						
to reduce incidents/impa	icts.	regulations will work to o	comply with the law.					
Evaluation Methods:								

Compare rates of hazardous materials incidents to communities of similar size in our region. Determine if HMMP and HMIS plans were present where facilities had incidents. Monitor regulations affecting transportation to determine if new hazards are present.

#### **Moderate Risk Fire**

#### Problem Statement:

Moderate risk fires include fires in 1 or 2 family homes, apartment buildings with 3 or fewer units, and buildings less than 6500sf. These fires have the potential for loss of life and significant fire loss.

#### Goal:

To have zero fire deaths, reduce the rate of injury from fire, and reduce the number of fires.

#### Resources Required:

Website Staff time for presentation of learn not to burn Brochures Investigation personnel/time

Juvenile FireSetter program

#### **Community Partners:**

Fargo Police Department North Dakota State Fire Marshal

US Bureau of ATF American Red Cross

Fargo and West Fargo Public Schools

Fargo Private Schools Fargo Park District

Outputs	Short-Term Impacts	Long-Term Impacts	
No. of brochures	Create a safety mindset	Change community	
distributed.	in school age children	behavior to reduce	
No. of people taught	and juveniles.	unintentional fires.	
Fire incident data	Create awareness of	(proper disposal	
No. of investigations	causes of fires.	methods).	
prosecuted	Create awareness of	Reduce the number	
No. of investigations	smoke alarms.	and impact of fire	
determined	Create awareness of	incidents.	
No. of detectors	importance of fire	Change attitude	
installed	sprinklers	towards built in fire	
No. of buildings		protection systems	
sprinklered			
	Assumptions:		
rogram rationale)	(Factors or conditions assumed to be true)		
tarted for multiple	People will want to reduce the number of fires		
c is aware of those	when they are aware of the impact and		
navior changes can	knowledgeable on the methods of prevention.		
es.			
	No. of brochures distributed. No. of people taught Fire incident data No. of investigations prosecuted No. of investigations determined No. of detectors installed No. of buildings sprinklered  rogram rationale) carted for multiple to is aware of those havior changes can	No. of brochures distributed. No. of people taught Fire incident data No. of investigations prosecuted No. of investigations determined No. of detectors installed No. of buildings sprinklered  Assumptions: (Factors or conditions as as aware of those avareness can safety mindset in school age children and juveniles. Create awareness of causes of fires. Create awareness of smoke alarms. Create awareness of importance of fire sprinklers  Assumptions: (Factors or conditions as when they are aware of the moveledgeable on the moveledg	

#### **Evaluation Methods:**

Specific programs can be evaluated based on a reduction of incidents on a pre and post program basis. The overall incident rates will be compared to cities of similar size in our region. Juvenile fire setter rates will be monitored to determine if further intervention is needed. The number of residential buildings with sprinkler systems and smoke alarms are significant since the chance of dying in a fire is reduced by 80%.

#### **High Risk Fire**

#### Problem Statement:

High-risk fires include fires in Hospitals, Nursing homes, Schools, places of Public Assembly, and buildings greater than 6500sf. These fires have the potential for loss of life and significant fire loss.

## Goal: To have zero fire deaths, reduce the rate of injury from fire, and reduce the number of fires. Resources Required:

Website Staff time for presentation of learn not to burn
Brochures Investigation personnel/time
Juvenile FireSetter program Owner/Occupant training

#### **Community Partners:**

Fargo Police Department North Dakota State Fire Marshal US Bureau of ATF American Red Cross

Fargo and West Fargo Public Schools

Fargo Private Schools Fargo Park District

Activities	Outputs	Short-Term Impacts	Long-Term Impacts
Code Enforcement to	No. of brochures	Create a safety mindset	Change community
ensure property	distributed.	in school age children	behavior to reduce
owners are compliant.	No. of people taught	and juveniles.	unintentional fires.
Distribute information	Fire incident data	Create awareness of	(proper disposal
and presentation.	No. of investigations	causes of fires.	methods).
Advocate for fire	prosecuted	Create awareness of	Reduce the number
sprinklers	No. of investigations	smoke alarms.	and impact of fire
Collaborate with FPD	determined	Create awareness of	incidents.
to determine persons	No. of detectors	importance of fire	Change attitude
responsible	installed	sprinklers	towards built in fire
	No. of buildings		protection systems
	sprinklered		,
Rationale		Assumptions:	

	351111111111111111111111111111111111111		
Rationale:		Assumptions:	
	(How change occurs & program rationale)	(Factors or conditions as	sumed to be true)
	High risk fires are started for multiple reasons.	People will want to reduce	ce the number of fires
	Property owners and staff are integral to fire	when they are aware of t	he impact and
	safety for high risk occupancies. Staff that is	knowledgeable on the m	ethods of prevention.
	cognizant of fire safety will work to reduce the		
	impact and number of fires.		

#### **Evaluation Methods:**

Specific programs can be evaluated based on a reduction of incidents on a pre and post program basis. The overall incident rates will be compared to cities of similar size in our region. The number of residential buildings with sprinkler systems and smoke alarms are significant since the chance of dying in a fire is reduced by 80%.

#### Water/Ice Rescue

#### **Problem Statement:**

The Red River is the main body of water located in Fargo, ND. The river is not typically used for recreational swimming. Regardless there are several drownings a year in the river. Other retention basins and legal drains also present a drowning hazard.

#### Goal:

To reduce the instances of drownings and near drownings. Increase the understanding of the				
importance of PFD's.  Resources Required:				
Brochures	Lifebuoy a	and cabinet		
Personnel presentation t	ime Mainte	enance personnel time for	lifebuoy	
website				
Community Partners:				
Fargo Park District	FM Amb	ulance		
River Keepers	Red Rive	r Dive Team		
North Dakota Game and	Fish US Arm	y Corps of Engineers		
Activities	Outputs	Short-Term Impacts	Long-Term Impacts	
Distribute Brochures. Install Safety throw rings at common drowning areas. Create awareness of water safety programs provided by partners through website.	No. of Brochures distributed. No. of website visits. No. of throw rings installed. No. of times rings used.	Create awareness of throw ring locations. Create awareness of water safety.	Change behavior of public to safe use of Red River, and other bodies of water.	
Rationale:		Assumptions:		
(How change occurs & p	rogram rationale)	(Factors or conditions assumed to be true)		
Many of the incidents in	•	If a method was readily available, (throw ring)		
involve the use of alcoho		chances of survival will increase. The public will		
behavior. Education will drive behavior changes.		act safer when they are aware of water safe		
Systems should be in place in the event a person		behaviors.		
is in the water in need of help.				
Evaluation Methods:				
Measure the rate of drownings versus previous years. Measure the rate of near drownings.				

#### **Technical Rescue**

#### **Problem Statement:**

Technical Rescue incidents include structural collapse, confined space rescue, high angle rescue, and trench rescue. Fortunately, technical rescue incidents are a low frequency event. However, their impact can be significant including loss of life.

#### Goal:

Continue to maintain a low incident rate of technical rescue incidents.

#### **Resources Required:**

Brochures Staff time for presentations				
Classroom presentation	on Website			
Community Partners:				
OSHA	OSHA North Dakota WSI			
North Dakota Safety Cou	ncil City of Far	rgo Building Inspections		
Activities	Outputs	Short-Term Impacts	Long-Term Impacts	
Distribute brochures. Coordinate classes with community partners. Direct employers to community partners.	No. of Brochures distributed. No. of classes held. No. of employers trained.	Create awareness of the hazards surrounding technical rescue incidents. Provide educational information to employers.	Change behavior of employers to reduce high risk behaviors. (using trench boxes, confined space monitoring, etc)	
Rationale: Assumptions:				
(How change occurs & p	rogram rationale)	(Factors or conditions assumed to be true)		
Several regulations currently exist to reduce the possibility of technical rescue incidents. Employers should be made aware of the regulations and best practices. Over time behavior will encourage safe practices.		Community partners will work to provide information regarding workplace regulations. Employers that are aware of the regulations and best practices will want to comply.		
Evaluation Methods:				
Measure the rate of technical rescue incidents. Determine if near miss data is available and measure year to year changes.				

#### Flood

F100U
Problem Statement:
The city of Fargo's topography is prone to spring flooding and flash flooding due to rainstorms. The potential of property loss is significant. Loss of life is also possible during significant flooding events.
Goal:
To reduce the impact of a flood event.
Resources Required:
Brochures
Website

Community Partners:			
FM Diversion Authority American Red Cross FFMA	Fargo Cass Emergency Management City of Fargo Engineering City of Fargo Public Works		
Activities	Outputs	Short-Term Impacts	Long-Term Impacts
Provide links to flood information on website. Distribute informational brochures. Promote preparedness and resiliency.	No. of website visitors. No. of brochures distributed. No. of 'ready' businesses	Create awareness of the impact of flooding. Create awareness of steps to take to prepare. Create awareness of steps to reduce impact.	Reduce impact of flood events. Have systems in place to prevent flooding (diversion)
Rationale: (How change occurs & program rationale)		Assumptions: (Factors or conditions assumed to be true)	
Educate the public about the impact of floods and how they can be prepared. Educated citizens will take steps to recover and reduce the impact of a flood.		Citizens and businesses would take steps necessary to ensure that daily operations can continue. Community partner agencies will continue to put systems in place to reduce flooding risk.	
Evaluation Methods:			
Evaluate the preparedness of the city at various flood levels.			

#### Tornado

Problem Statement:			
Tornadoes have the potential to cause injury, death, and property damage. The City of Fargo is at risk			
of a tornado and has experienced a tornado causing injury, death, and property damage.			
Goal:			
To reduce injury and death from a tornado.			
Resources Required:			
International Fire Code	International Building Code		
Staff time	Website and social media	Brochures	
ICC 500			
Community Partners:			

Facility owners Multi-Family Residential property owners			
Community groups	North	Dakota State University	News outlets
National Weather Servic	e Red Cr	ross	Mobile Home
Parks			
FEMA	Fargo Cas	ss Emergency Management	
Activities	Outputs	Short-Term Impacts	Long-Term Impacts
Distribute brochures.	No. of preparedness	Create awareness of	Reduce tornado injury
Social media	plans reviewed	watches vs. warnings.	and death.
campaigns.	No. of brochures	Create awareness of	Increase community
Review tornado	distributed	proper tornado	resilience.
preparedness plans.	No. of people directed	shelters.	Improved building
Distribute information	to ready.gov and	Create awareness of	techniques that
through community	weather.gov	tornado impacts.	provide for safe areas.
partners.			Improved recovery
Provide links to			time and minimized
ready.gov and			impact.
weather.gov			
Rationale:		Assumptions:	
(How change occurs & program rationale)		(Factors or conditions assumed to be true)	
Create awareness of proper tornado shelters.		Individuals who have received tornado risk	
Create awareness of tornado and storm		reduction education and timely warning	
warnings.		notification, recognize the life-threatening	
Create awareness of Cass/Clay alerts.		situation, and have proper shelter available will	
Offer awareness education in multiple languages		take action to protect th	eir lives.
through community partners.			
Citizens will become educated on how to prepare			
before, react to, and recover from a tornado.			
Evaluation Methods:			
Through surveys and community input to determine the readiness of businesses and residents			